



ECONOMY / BASIC LCD











19RCE

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

OVERVIEW

The ORION Images 19RCE LCD CCTV series is commercial grade - built to run 24 x 7 x 365 continuously. The RCE series offers versatility with multiple input under economy value and can be used for both security and industrial solutions.

FEATURES

- 19 Inch Screen Size
- 1280 x 1024 Native Display Resolution
- Description BNC Video 2 In / 1 Out, HDMI 1 In, VGA 1 In, Audio 1 In / 1 Out
- 5ms, 300 Nits, 1000:1 Contrast
- 3D Comb Filter
- 5:4 Aspect Ratio
- 2W x 2 Built-In Speakers
- Mount Options: Wall, Ceiling or Rack









19RCE

SPECIFICATIONS

19RCE Display	
Max. Resolution	1280 x 1024 @ 75Hz
Pixel Pitch	0.294 x 0.294mm
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Aspect Ratio	5:4
Viewing Angle (H/V)	170°/ 160°
Display Color	16.7 Million
Response Time	< 5ms (type on/off)
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	2 In / 1 Out
HDMI In	1 In
VGA In (15Pin D-Sub)	1 ln
Audio In	1 ln
Audio Out	1 Out
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes
Features	
Filter Type	3D Comb Filter
Multi Language	English, Chinese
General	g,
Outline Dimension (W x H x D)	16.81" x 13.81" x 1.77"
Net Weight	3.54kg (7.80 lbs)
Material / Color	ABS Plastic / Black
Desk Top Stand	Tilt Back
Part / Labor	2year / 2year
Consumption: < On	< 20 W
	AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC12V / 4A
Operating Temperature	0 ~ 40 °C / 32 ~ 104 F°
Storage Temperature	-20 ~ 60 °C / -4 ~ 140 F°
Mounts	
VESA™ Mount Size	75 x 75mm
Wall	WB-5, WB-10, WB-30, WB-31
Ceiling	CMK-01
Rack	RMK-08
losinn and enerifications are subject to channe without notic	11


^{*}Design and specifications are subject to change without notice

TILT CAPABILITY


RCE series has flexible tiltable desktop stand capability




INPUT INTERFACE

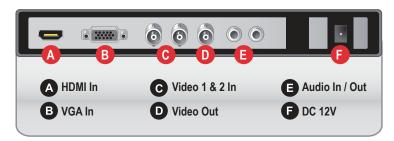

DIMENSIONS





OPTIONAL MOUNTS



