

Access & Power Integration

Trove3MBK3

Trove3 enclosure with TMB3 backplane and 36 BR3M mounting brackets

All components of this Trove kit are UL Listed sub-assemblies.
Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

Installation Guide

All registered trademarks are property of their respective owners.



More than just power.™

Rev. T3MBK3042121

Installing Company: _____ Service Rep. Name: _____

Address: _____ Phone #: _____

Overview:

Altronix Trove3MBK3 enclosure/backplane and brackets accommodate Altronix power supply/charger(s), sub-assemblies and Mercury/LenelS2 controllers.

Hardware and Accessories:

- Two (2) tamper switches (Altronix Model TS112 or equivalent).
- Cam lock.

Mechanical:

- 16 Gauge enclosure with ample knockouts for convenient access.
- Enclosure Dimensions (H x W x D): 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm).

Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

1. Mark and predrill holes in the wall to line up with the top three keyholes in the enclosure. Install three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the three upper screws, level and secure. Mark the position of the lower three holes. Remove the enclosure. Drill the lower holes and install the three fasteners. Place the enclosure's upper keyholes over the three upper screws. Install the three lower screws and make sure to tighten all screws.

2. Mount included UL Listed tamper switches (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure approximately 2" from the right side (*Fig. 1, pg. 2*). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.

3. Mount Altronix power supply/charger(s), sub-assemblies and Mercury/LenelS2 controllers to brackets (BR3M), refer to *fig drawings below*.

5. Secure BR3M brackets with boards to the backplane (TMB3) utilizing two (2) lock nuts (*Fig. 5, pg. 3*).

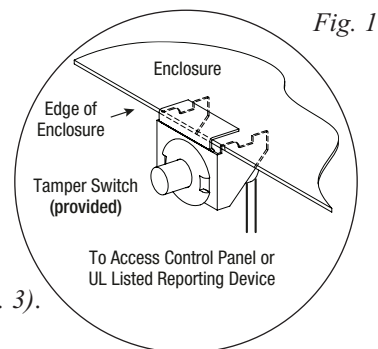


Fig. 2 - Pem location

PEM Location	Mercury Platform	LenelS2	Altronix
1	LP4502, LP1502, MR16IN, MR16OUT, MR52	LNL-1100, LNL-1200, LNL-1320, LNL-2220, LNL-4420	ACM4(CB), ACM8(CB), ACMS8(CB), LINQ8ACM(CB), LINQ8PD(CB), PD8UL(CB), PDS8(CB), VR6
2	LP4502, LP1502, MR16IN, MR16OUT, MR52	LNL-1100, LNL-1200, LNL-1320, LNL-2220, LNL-4420	eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB
3			ACM4(CB), ACM8(CB), ACMS8(CB), LINQ8ACM(CB), LINQ8PD(CB), PD8UL(CB), PDS8(CB), VR6
4	LP2500, MUX8	LNL-3300, LNL-8000	
5			ACM4(CB), LINQ8PD(CB), PD8UL(CB), PDS8(CB), VR6
6	LP4502, LP1502, LP2500, MR16IN, MR16OUT, MR52, MUX8	LNL-1100, LNL-1200, LNL-1320, LNL-2220, LNL-3300, LNL-4420, LNL-8000	
7			eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB
8	LP4502, LP1502, LP2500, MR16IN, MR16OUT, MR52, MUX8	LNL-1100, LNL-1200, LNL-1320, LNL-2220, LNL-3300, LNL-4420, LNL-8000	ACM4(CB), LINQ8PD(CB), PD8UL(CB), PDS8(CB), VR6

Trove3MBK3 Configuration of Altronix / LeneIS2 / Mercury Platform Boards:

Altronix / Lenel / Mercury Access Controller	Pem Mounting
eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB	(A)
ACM4, ACM4CB, ACM8, ACM8CB, ACMS8, ACMS8CB, LINQ8ACM, LINQ8ACMCB, LINQ8PD, LINQ8PDCB, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB	(B)
LNL-2220, LNL-4420, LNL-1320, LNL-1100, LNL-1200, LP1502, LP4502, MR52, MR16IN, MR16OUT	(C)

Fig. 3



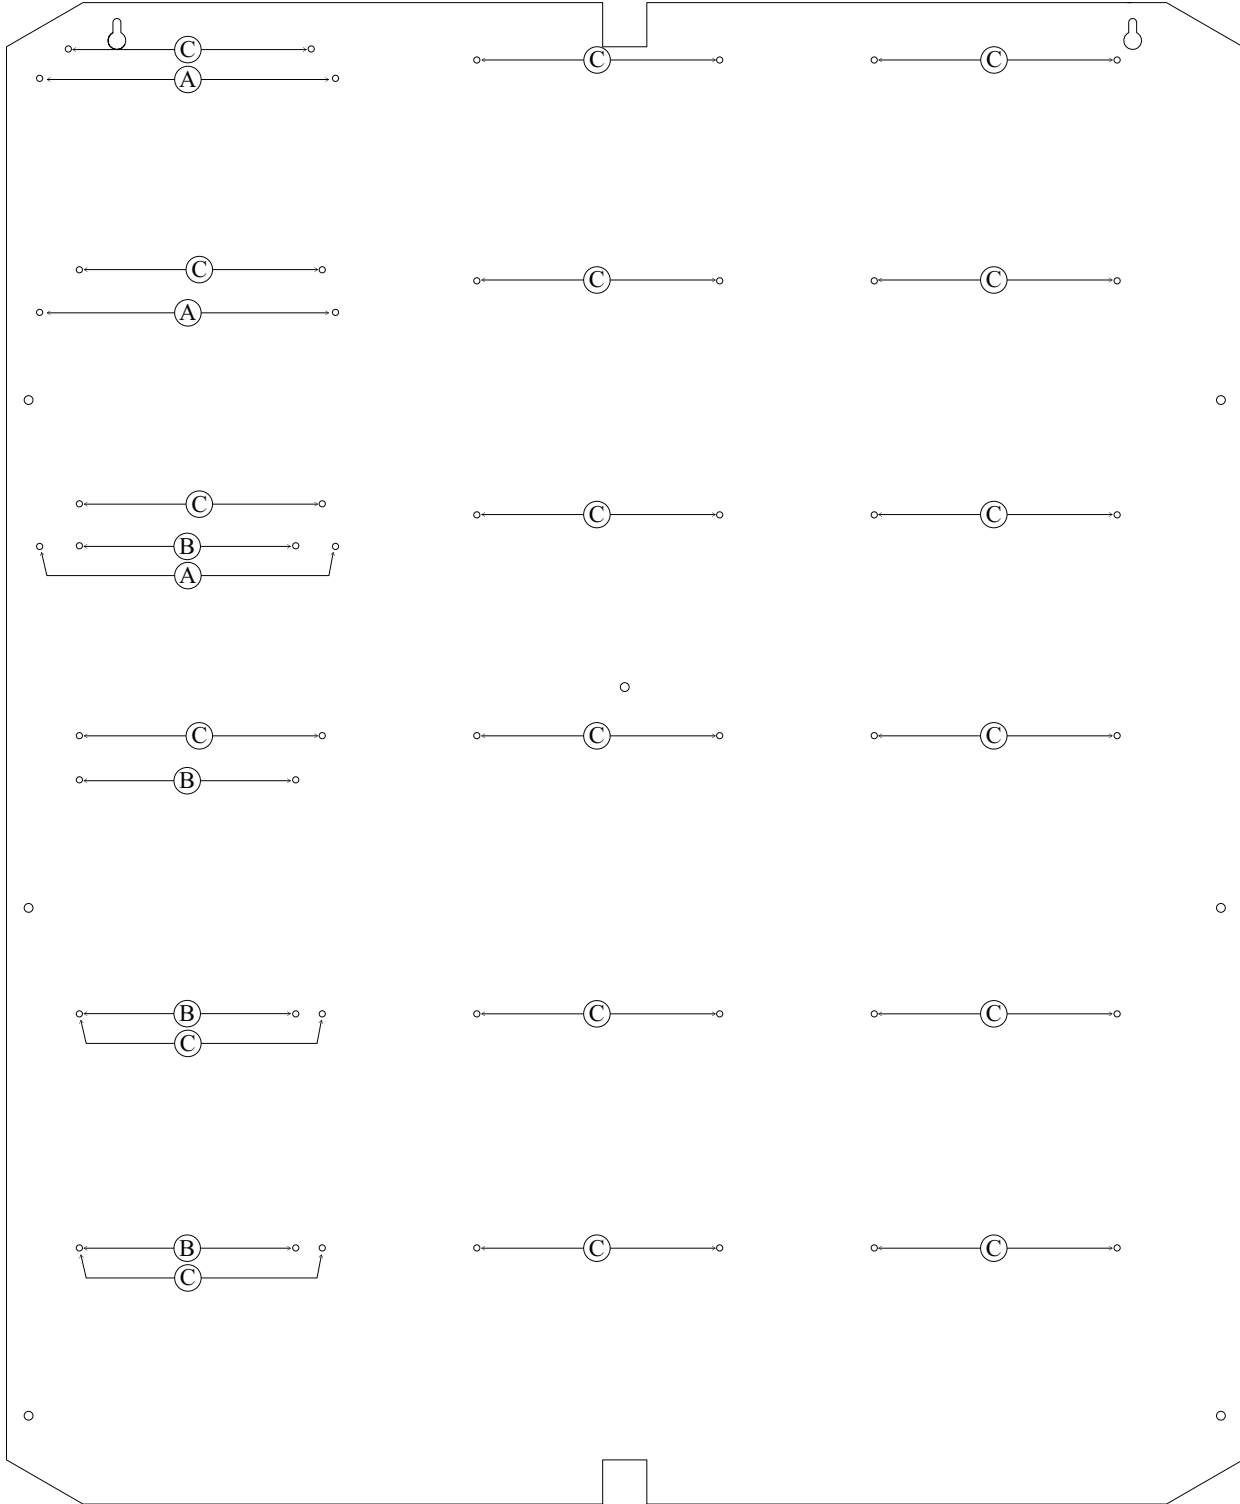


Fig. 4



Trove3 Enclosure Dimensions (H x W x D approximate):
 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

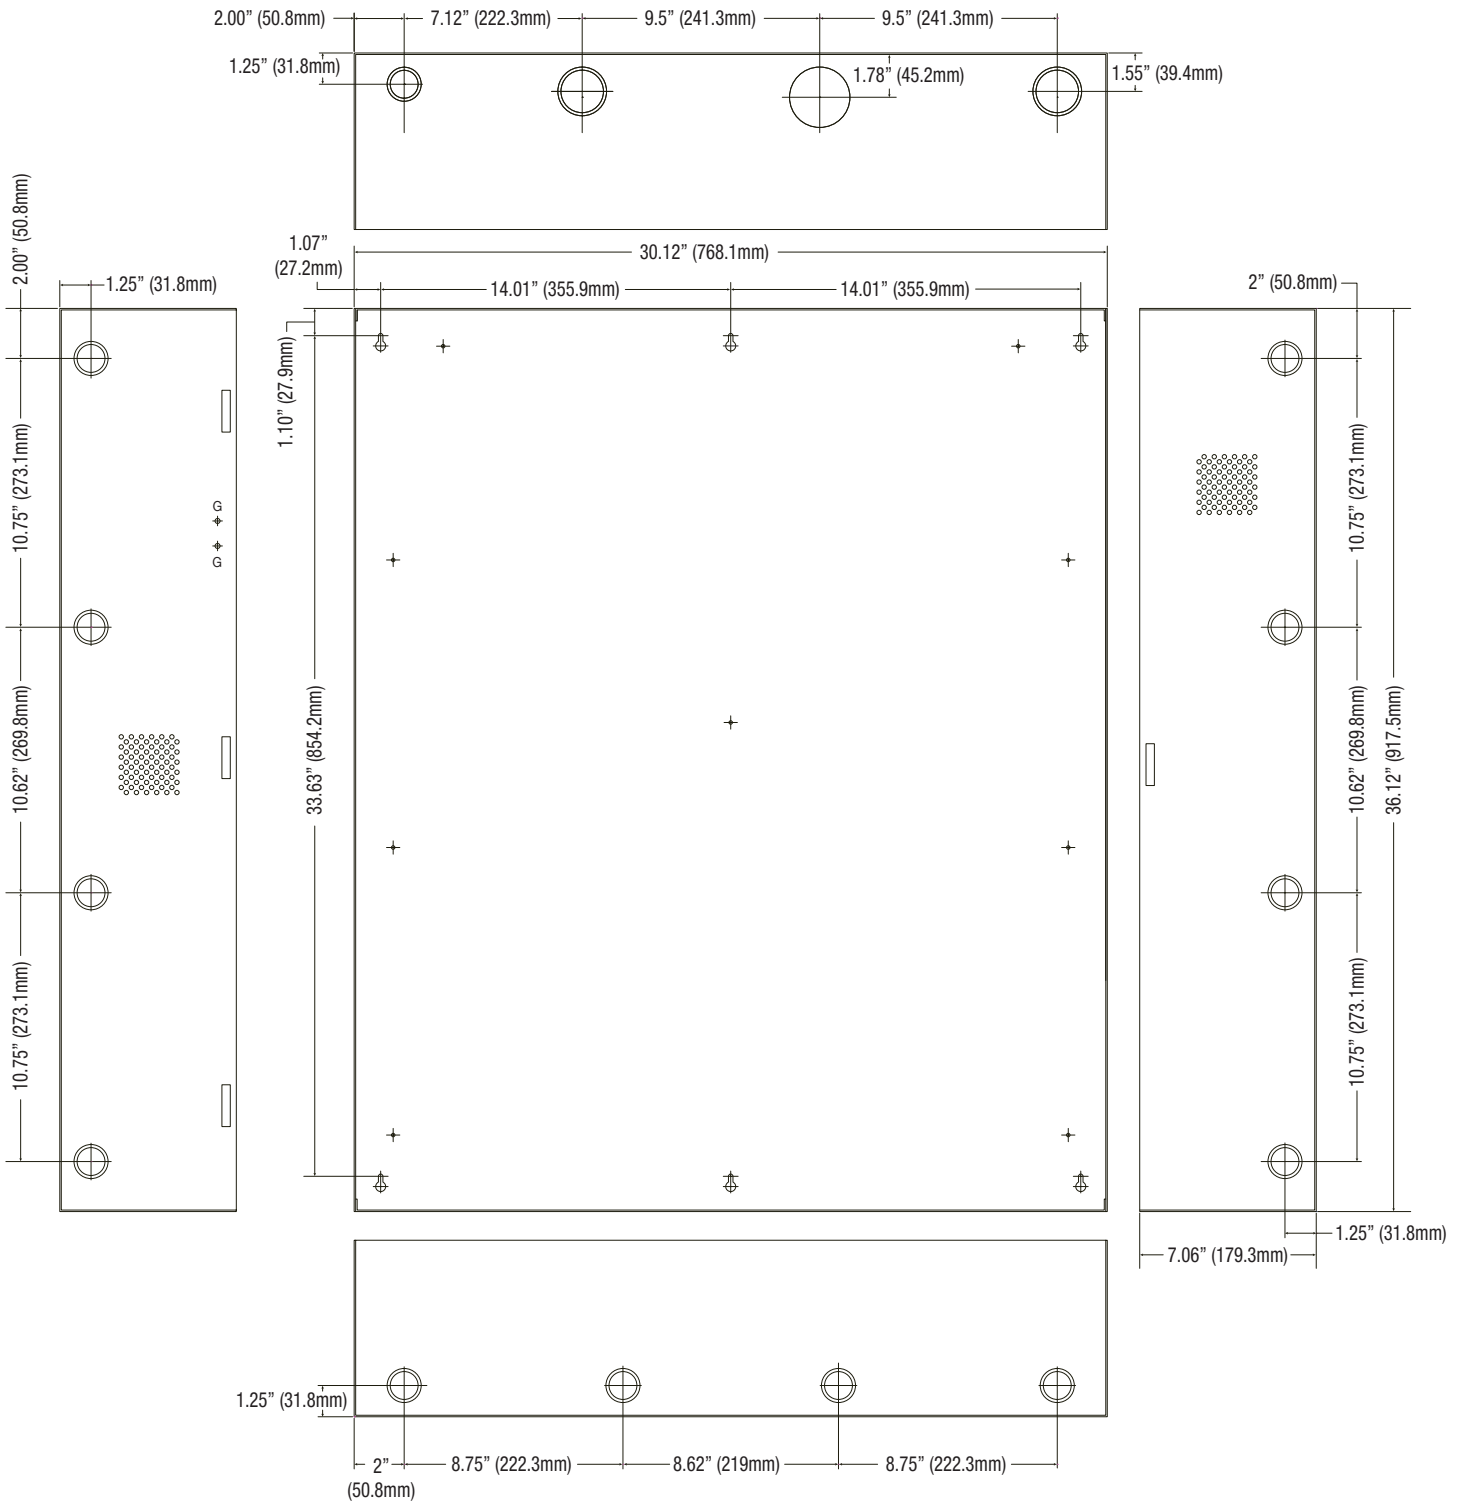

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 web site: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty | Made in U.S.A.
 IITrove3MBK3

E17U



MEMBER

Trove3MBK3