

### ⚠ CAUTION ⚠

- 1 Read instructions through completely before proceeding.
- 2 Follow instructions carefully. Installation contrary to instructions invalidates warranty.
- 3 Screen should be accessible for complete removal should fabric become damaged or should other service be required.
- 4 Screen should be installed level (*using a carpenter's level*). The case must also be installed so that the top of the case is level (*front-to-back*) to prevent the fabric from contacting the case housing.
- 5 Nothing should be fastened to screen dowel or viewing surface.
- 6 Operating switch(es) packed separately in screen carton. Do not discard with packing material.
- 7 Screen operates on 110-120V, 60 hz. current.

*Screen has been thoroughly inspected and tested at factory and found to be operating properly prior to shipment.*

*These instructions are meant as a guide only. They do not imply any responsibility on the part of the manufacturer for improper installation or faulty workmanship at the jobsite.*


### Hanging Screen

When locating viewing surface and checking clearance for screen operation, remember surface is centered in the length of the case. Regardless of mounting method used, the following points apply:

- 1 Mounting brackets are shipped attached to the case. Engage each bracket with top of housing as shown below and tighten set screws.
- 2 Screen should be positively and securely supported so that vibration or even abusive pulling on viewing surface will not weaken installation.

**Please Note:** A Hoisting Bracket is included on each end of the case to aid in overhead installation of the Access Fit case.

- 3 Installer must insure that fasteners used are of adequate strength and suitable for the mounting surface chosen. Supporting hardware (*chains, cables, 3/8" rods, etc.*) must be essentially vertical.
- 4 Entire bottom of case must be readily accessible after installation is complete.
- 5 Front, back and top of case must be straight— not forced to warp or bow.
- 6 If case is painted on location, removal of roller/fabric assembly is recommended prior to painting. If not removed, slot on bottom of case should be shielded to protect viewing surface from paint splatters/overspray.
- 7 Do not seal unit in ceiling until electrical connections have been made and screen has been operated successfully.

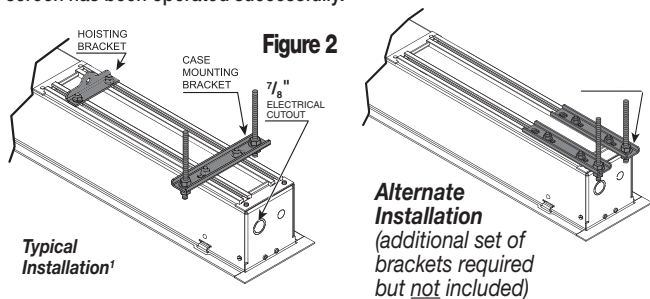

<sup>1</sup>With typical installation, brackets may be angled to meet installation requirements.

Suitable for use in environmental air space in accordance with Section 300-22(c) of the National Electrical Code, and Sections 2-128, 12-010(3) and 12-100 of the Canadian Electrical Code, Part 1, CSA C22.1.

### Electrical Connections

Screen operates on 110-120V, 60 hz., 1.1 amp current draw. Duty Cycle: ON 28 seconds /OFF 4 minutes.

Junction box is located just above the bottom access panel at left end of screen (*standard, right end may be specified*).

Remove the bottom access panel for access to the junction box cover. (See *Bottom Access Panel Removal instructions below*). Remove two (2) hex head screws that secure the cover to the junction box to expose the red, black, and white pigtail leads and the green ground wire per wiring diagram on page 4.

If optional low voltage control is specified and factory installed, please refer to wiring diagrams on page 4.


Screen is shipped with internal wiring complete and control switch(es) fully boxed. Wire to connect screen to switch(es) and switch(es) to power supply should be furnished by installer. Connections should be made in accordance with attached wiring diagram, and wiring should comply with national and local electrical codes.

⚠ All operating switches should be "off" before power is connected.


### Bottom Access Panel Installation/Removal

Bottom access panel is secured to the screen housing by two screws (*one on each end*), and is held in the closed position by engagement brackets with ball detents that snap into case support brackets.

#### To remove the Access Panel:

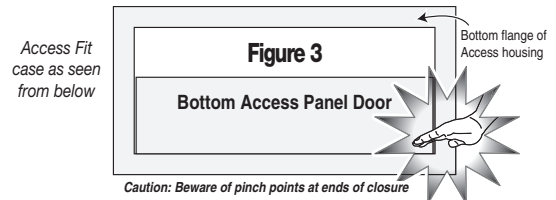

- 1 Remove screws from both ends of screen housing (Fig. 3).
- 2 Pull down on the access panel until the ball detents on the engagement bracket have disengaged from the support bracket.
- 3 Repeat Step 2 for all brackets along the length of the screen housing.

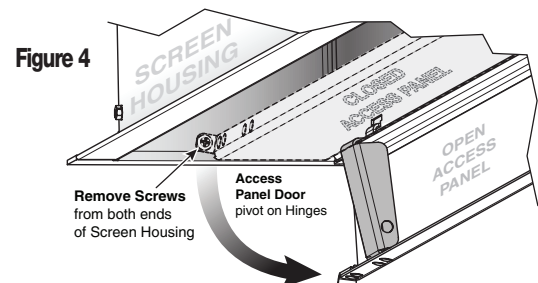


- 4 The access panel will be free to pivot downward. It will remain attached to the lower inside edge of the screen housing by several steel hinges.

**Caution:** For larger sizes Step 5 requires two people to perform safely.

- 5 Press up on access panel and pull toward the front of the screen housing to disengage hinges and remove access panel.

#### To Remove/Install Support Brackets:

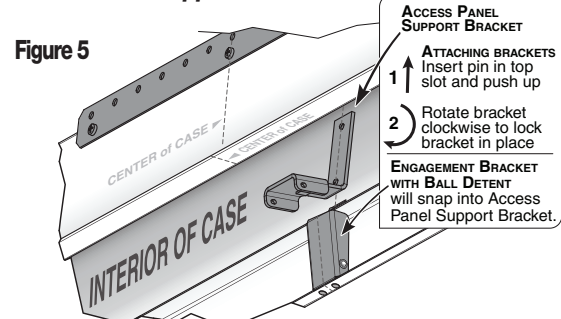

If you have any difficulties installing or servicing your Access Fit Electric Projection Screen, call your dealer or Draper, Inc.

## Motorized Roller/Fabric Installation

**Please note:** When ordering a motor with internal Low Voltage Controller, if the case ships separate from the "guts," the case includes the 25' cable and special low voltage switch.


- 1 The bottom access panel must be removed first. (Pg 1, Fig. 4).

- 2 The motor end mounting bracket has a metal bracket with snap ring for accepting motor head. Back out the two set screws in bracket until they are flush with top side of bracket.

- 3 To engage the motor end bracket flange above the two channels in the top of the screen housing, rotate the bracket approximately 45° counterclockwise to allow the top surface of the motor bracket to rest flat against the top inside of the housing.

- 4 Rotating the bracket clockwise until it is engaged with the channels, slide it along the length of the housing against the electrical junction box.

- 5 Engage idler end bracket (*rectangular mounting pad*) in the same manner as motor end bracket and slide it toward the opposite end of the screen housing. Do not tighten set screws on this bracket until the roller/fabric assembly is installed, and centered in case.

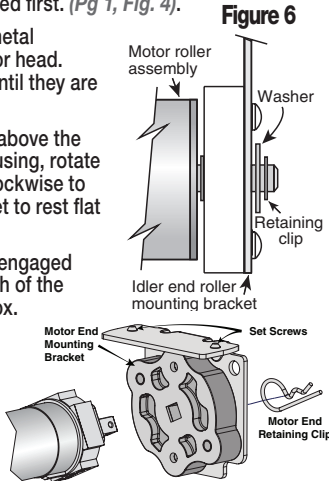

**Note:** Step 6 requires two people to perform safely.

- 6 Locate the black washer and retaining clips attached to the instruction sheet.

Raise the roller/fabric assembly up into the screen housing and engage the head of the motor **completely into the motor mounting bracket**, making sure the limit switch adjusting knobs are visible from the bottom of the screen housing (see fig. 8). If snap ring is provided, make sure the snap ring engages with the motor. If retaining clip is provided instead, install to lock motor end in place.

- 7 While supporting the idler end of the roller, slide the idler end mounting bracket toward the roller. Insert the roller pin into the nylon bushing on the idler end mounting bracket.

- 8 The roller idler pin needs to go through the idler bracket far enough to allow the washer and retaining clip to be reinstalled on the pin.

**CAUTION:** Failure to replace the washer and retaining clip could result in the separation of the roller from the brackets.

- 9 The roller/fabric assembly and roller brackets may need to be slid left or right in the mounting channel of case to center fabric within screen case.
- 10 Securely tighten the set screws on roller mounting brackets.
- 11 Connect the electrical plug from the motor to the mating socket on the junction box.
- 12 Reinstall the bottom access panel as previously described.




Figure 7

## Motorized Roller/Fabric Removal

Reverse the instructions above "Motorized Roller/Fabric Installation" for removal of the unit.

## Operation

When screen is first operated, be cautious! Cycle unit down and up several times to confirm satisfactory operation. **Be prepared to cut POWER if necessary.**

**110-120V SINGLE STATION CONTROL:** 3-position UP-OFF-DOWN switch permits operation to be stopped at any point. Factory adjusted limit switches automatically stop screen when fully down or fully up.

**110-120V MULTIPLE STATION CONTROL:** Switches are similar in appearance to 110-120V Single Station Control. Screen stops when switch is released and may be restarted in either direction. Factory adjusted limit switches stop screen automatically when fully up or fully down.

**24V CONTROL:** Three-button UP-STOP-DOWN switches stop at any point desired, operate in any sequence. Factory adjusted limit switches automatically stop screen when fully up or fully down.

**110-120V & 12V VIDEO INTERFACE CONTROL:** Allows screen to be controlled by trigger signal—when the signal comes on, the screen descends automatically.

**KEY OPERATED SWITCHING:** Optionally available with this unit. The key-operated power supply switch controls power to the screen and switches. When it is "off," the switches will not operate screen. Key may be removed from the switch in either "on" or "off" position.


**RS232 / ETHERNET:** Serial communication and network communication optionally available.

## Tab-Tension Adjustment Procedure

Draper's Tab-Tensioning System is factory-set, and under normal circumstances will not require field adjustment. If, however, you notice wrinkles, waves or other indications that the tensioning cables need to be adjusted, follow the procedure below.

- 1 Determine which side requires adjustment.
- 2 Secure dowel with one hand.
- 3 Using Phillips-head screwdriver, depress spring-loaded adjustment screw and slowly turn **CLOCKWISE TO INCREASE tension**, or **COUNTER-CLOCKWISE TO RELEASE tension**. The screw adjusts in 60° turn increments. Adjust only one increment (60° turn) at a time.
- 4 If problem is not corrected, leave screen in position for 24 hours to allow surface material to stretch into position.
- 5 If problem still is not corrected, repeat steps 2 and 3.

Figure 8

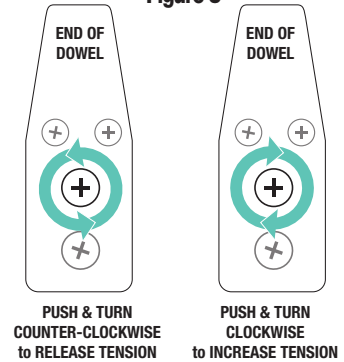

## Limit Adjustments (Standard/Quiet Motors)

**Please Note:** Screen limits are factory set for optimum performance of the screen. A procedure is outlined below for minor tweaks, but any adjustment of these limits may negatively affect the flatness of the screen surface and could also void the warranty. Please check with Draper prior to resetting screen limits.

**CAUTION:** Always be prepared to shut screen off manually when new adjustment is being tested. Screen may be severely damaged if viewing surface is allowed to run too far up or too far down.

**CAUTION:** Be sure all switches are in "off" position before adjusting limit switches. The motor limit screws are normally located on the audience left of screen roller.

**Please Note:** If Access Fit E/V is "Right Hand Motor" or "Waterfall", the **WHITE/DOWN (I)** and **YELLOW/UP (II)** limit screws are reversed. See graphic below.

### "Down" Limit Adjustment

#### To Reduce Screen Drop

- 1 Raise screen surface about 1' above desired setting and turn off.
- 2 Turn the **WHITE/DOWN (I)** limit screw clockwise (*three screw turns = 1/2 roller revolution*).
- 3 Test by running screen down and repeat steps 1 and 2 until desired position is reached.

#### To Increase Screen Drop

- 1 Run screen to the down limit.
- 2 With the down switch on, turn the **WHITE/DOWN (I)** limit screw counter-clockwise (*3 screw turns = 1/2 roller revolution*) to increase drop.
- 3 Test by running screen up about 1' and back down to new down limit.
- 4 Repeat steps 2 and 3 until desired position is reached.

### "Up" Limit Adjustment

#### Screen is Running Too Far Up:


- 1 Lower screen surface about 1' below desired setting and turn off.
- 2 Turn **YELLOW/UP (II)** limit screw clockwise (*3 screw turns = 1/2 roller revolution*).
- 3 Test by running screen up.
- 4 Repeat steps 1 through 3 until desired position is reached.

#### Screen Needs to Run Up More

- 1 Run screen down about 1' and turn off.
- 2 With the up switch on, turn the **YELLOW/UP (II)** limit screw counter-clockwise (*3 screw turns = 1/2 roller revolution*).
- 3 Repeat steps 1 and 2 until desired position is reached.

Figure 9

**CAUTION:** Do NOT allow the dowel to wrap up over the roller when the screen is running up! This could damage the screen.

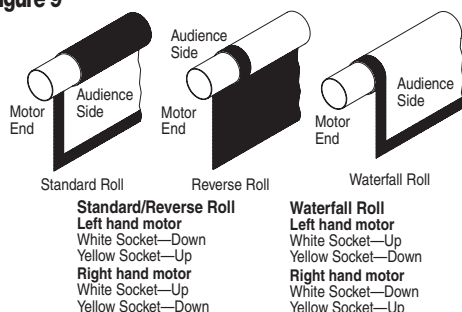


**Standard/Reverse Roll**  
Left hand motor  
White Socket—Down  
Yellow Socket—Up  
Right hand motor  
White Socket—Up  
Yellow Socket—Down

**Waterfall Roll**  
Left hand motor  
White Socket—Up  
Yellow Socket—Down  
Right hand motor  
White Socket—Down  
Yellow Socket—Up

**⚠ Please Note:** Screen limits are factory set for optimum performance of the screen. A procedure is outlined below for minor tweaks, but any adjustment of these limits may negatively affect the flatness of the screen surface and could also void the warranty. Please check with Draper prior to resetting screen limits.

**⚠ CAUTION:** Always be prepared to shut screen off manually when new adjustment is being tested. Screen may be severely damaged if viewing surface is allowed to run too far up or too far down.

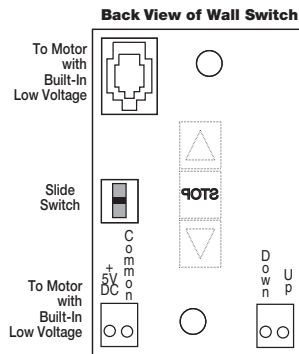

### Figure 10

**Please Note: 5V DC must be connected to be able to set limits using the wall switch.**

POSITION	FUNCTION
DOWN	Set LOWER limit
UP	Set UPPER limit
CENTER	Normal Operation

**⚠ CAUTION:** Be sure all switches are in “off” position before adjusting limit switches.

**Please note:** When ordering a motor with internal Low Voltage Controller, if the case ships separate from the "guts," the case includes the 25' cable and special low voltage switch.

- ① Connect the ILT switch to the motor via the terminal blocks, or via the modular port using four conductor modular cable. When using modular cable, the cable connectors **MUST NOT** be crimped in reverse, as with standard telephone cable. *(For a Dry Contacts Wiring Diagram, see page 4.)*
- ② Set the slide switch to the lower position. Press and hold the DOWN button on the switch to move the viewing surface to the desired lower limit. If the screen moves in the opposite direction, release the DOWN button and press and hold down the STOP button for four seconds. This will reverse the operation of the UP and DOWN switches.
- ③ Move slider switch into center position. Wait a couple of seconds.

**Please Note:** If you move the slider switch from down to up in one motion it sets the two limits in the same position.

- ④ Set the slide switch to the higher position. Move the viewing surface to desired upper limit by pressing and holding the UP button on wall switch.
- ⑤ Return the slide switch to the center position to return to normal operation.
- ⑥ To set the viewing surface to an alternate format position, move the viewing surface to the desired position and press the STOP button. Press and hold the STOP button for at least three seconds to record the position.


**Please Note:** Pressing and releasing the UP button on the switch will move the screen to its upper limit. Pressing and releasing the DOWN button will move the screen to its lower limit.

**While the motor is in motion, pressing the STOP button for less than two seconds will stop the viewing surface at its present position.**

Once the motor is stopped, pressing the STOP button will move the viewing surface to its alternate format position.

**Pressing and holding the STOP button, when the motor is at rest or in motion, for at least three seconds will record a new alternate format position.**

### Case Length Dimensions

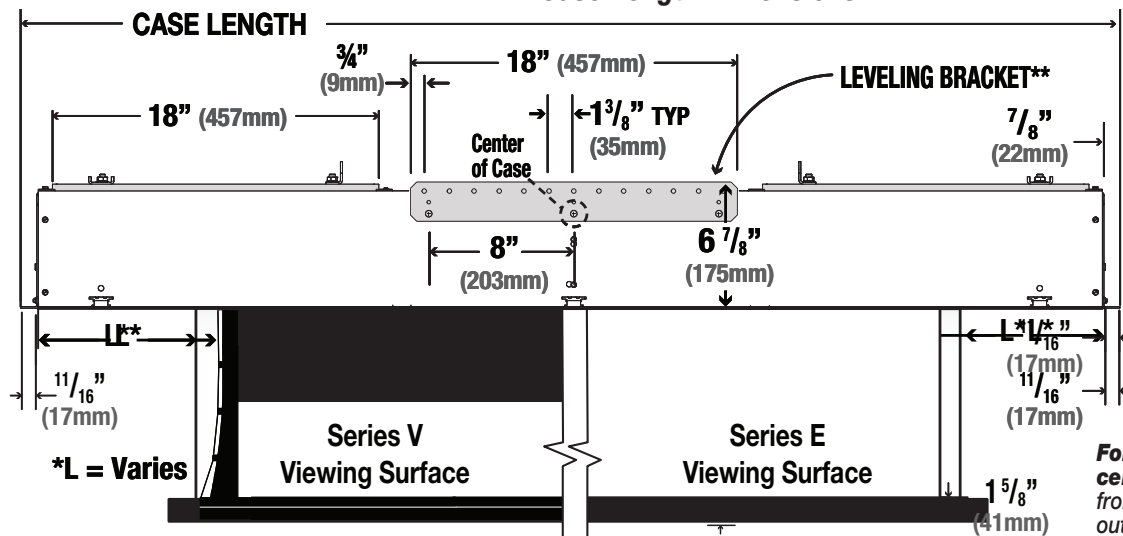

**For minimum length of ceiling cutout:** subtract 1 1/4" from case length (measured from outer edge of flanges).

**For minimum width of cutout (front to back):** see case width dimensions below.

**For minimum length of ceiling cutout:** subtract 1¼" (32mm) from case length (measured from outer edge of flanges).


**For minimum width of cutout (front to back):** see case width dimensions below.

**\*\*Leveling bracket** is used to level the case and should NOT be used to support the weight of the unit.

**The leveling bracket is screwed to the side of the case and remains stationary. Hardware used for leveling provided by others.**



**There are several knock-outs** in the screen housing to allow the Leveling Bracket to be adjusted laterally up to 16" (40.6cm) in either direction.

### Case Width Dimensions

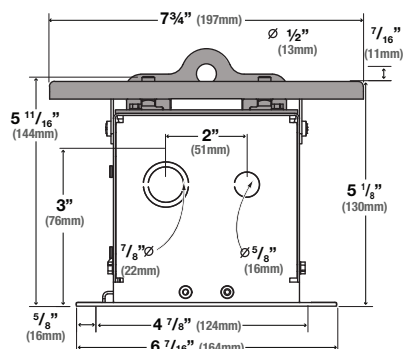

Standard Motor Wiring is on the  
**AUDIENCE LEFT END** of Screen Case.


### Mounting Bracket Dimensions

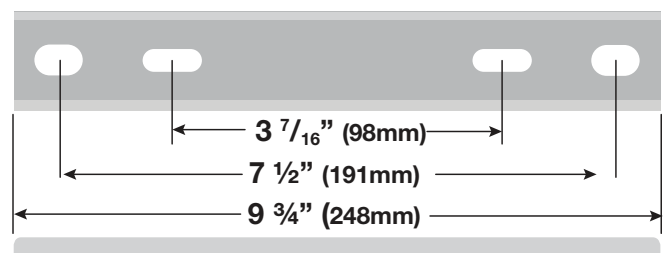


## Wiring Diagrams—110-120V Motor and Quiet Motor

**Please Note: Do not wire motors in parallel.**

## Single Station Control

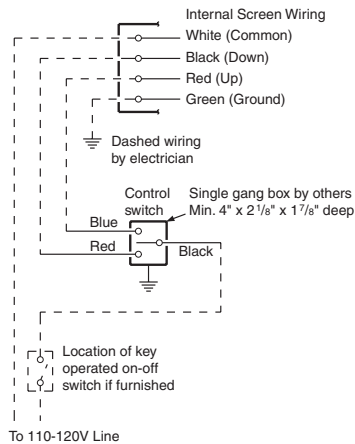


## Multiple Station Control

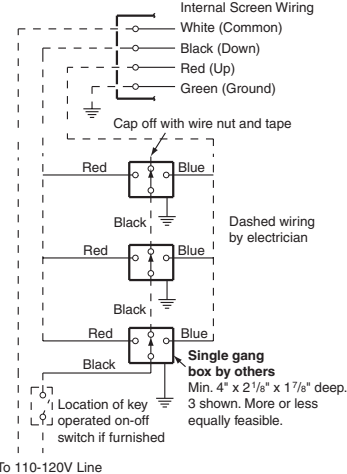


**\*These wiring diagrams are for Access screens with motor on audience left (standard), and fabric unrolling from the back of the roller (standard).**

## Wiring Diagrams—110-120V Motor and Quiet Motor with Internal Low Voltage Controller

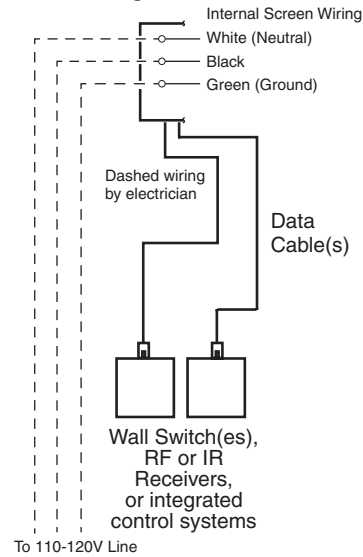


## ILT Data Cable Connection

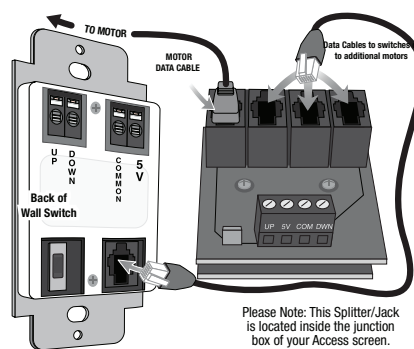


## Connecting Switch to ILT Motor

- OR -

## Dry Contacts

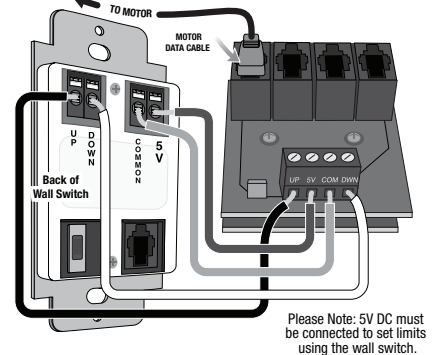

## Internal LVC-IV - Single or Multiple Projection Screen Wiring Diagram

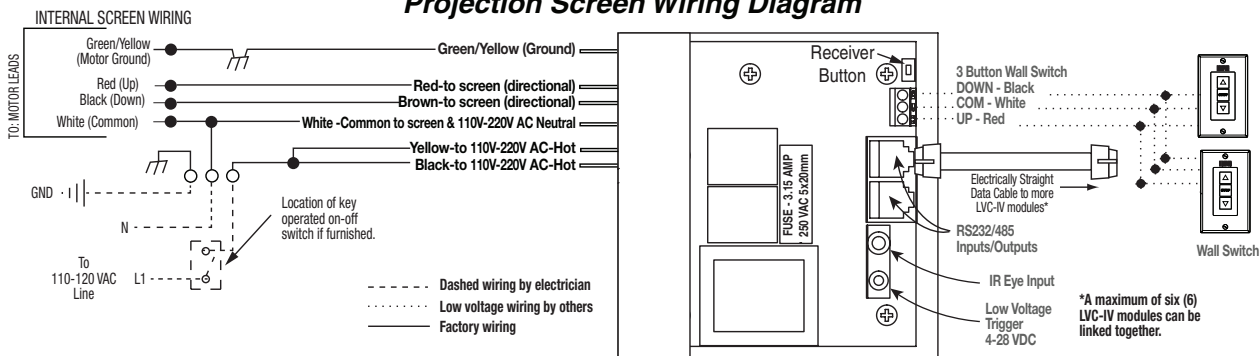

## External LVC-IV - Single or Multiple Projection Screen Wiring Diagram

