B8512G IP control panel, 8 areas, 99 points

G Series

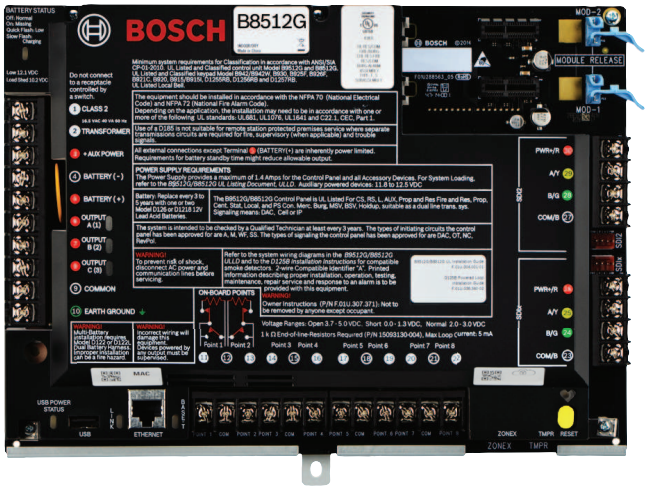

- Fully integrated intrusion, fire, and access control allows users to interface with one system instead of three
- Provides up to 99 points using a combination of hardwired or wireless devices for installation flexibility, and up to 8 areas and 8 doors for up to 500 users
- On-board Ethernet port for Conettix IP alarm communication and remote programming, compatible with modern IP networks including IPv6/IPv4, Auto-IP, and Universal Plug and Play
- Installer-friendly features for simple installation and communications, including plug-in PSTN and cellular communication modules

The B9512G Control Panel and the B8512G Control Panel are the new premier commercial control panels from Bosch. B8512G control panels integrate intrusion, fire, and access control providing one simple user interface for all systems.
With the ability to adapt to large and small applications, the B8512G provides up to 99 individually identified points that can be split into 8 areas.
The control panel communicates via the built-in Ethernet port or via compatible plug-in modules that can send events over the public switched telephone network (PSTN) or over cellular network communications.
For users, programmable keypad shortcuts, situation sensitive on-screen help, and a bilingual user interface make system operation simple and easy.
With the B8512G, you can:

- Monitor alarm points for intruder, gas, or fire alarms.
- Program all system functions local or remote using Remote Programming Software (RPS) or by using basic programming through the keypad.
- Add up to 8 doors of access control using the optional B901 Access Control Module.

The B8512G is a direct replacement for previous control panel models D7412GV4, D7412GV3, D7412GV2, and D7412G.

Functions

Programmable outputs

- Four alarm-output patterns
- Programmable bell test

Output Profiles

Output Profiles support custom programming and provide a way for outputs to operate based on unique application requirements.
Once an Output Profile is created, it can be reused and assigned to multiple outputs enabling quick output programming.
You can create Output Profiles that define how an output operates when specific events occur. Output Profiles provide a way to assign and use consistent output effects throughout the system.

Point response

- 63 point profiles
- Selectable point response time
- Selectable EOL values and configuration
- Cross point capability
- Fire alarm verification
- Dangerous gas indicator includes carbon monoxide
- Watch mode
- Selectable point response time

User interface

- Supervision of up to 16 keypads

- Custom keypad text is fully programmable through RPS
- Full function menu including customizable shortcuts
- Authority by area and 32 character name for each user
- 14 custom authority levels to restrict system features that each user can access
- Programmable primary and secondary language by user and keypad
- 12 available languages (any two can be concurrently used)

User interface languages
The following table shows the available languages per keypad type.

	B915/ B915I	B920/ B925F/ B926F / B926M	B921C	B930	B940W/ B942/ B942W
English	✔	✔	✔	✔	✔
Chinese	✔				✔
Dutch	✔	✔	✔	✔	✔
French	✔	✔	✔	✔	✔
German	✔	✔	✔	✔	✔
Greek	✔				✔
Hungarian	✔	✔	✔	✔	✔
Italian	✔	✔	✔	✔	✔
Polish	✔				✔
Portuguese	✔	✔	✔	✔	✔
Spanish	✔	✔	✔	✔	✔
Swedish	✔	✔	✔	✔	✔

Area configurations
Link multiple areas to a shared area such as a lobby or common entryway. The shared area then automatically turns On (arms) when all associate areas are armed and turns Off (disarms) when any one associate area is disarmed. For higher security applications, the Area Re-Arm feature guarantees that areas are always rearmed, and are disarmed for no longer than a specific, configurable, amount of time (for example, service time).

Custom functions
For added convenience, the installer can program custom functions that allow customers to complete complex tasks with one simple action. For example, a custom function can bypass a group of points and arm the system, allowing the user to perform these functions with one easy command. Users can activate custom functions with a keypad, keyfob, token, or card, or the control panel can activate a function in reaction to a faulted point, or automatically through a scheduled event (SKED).

Passcode security
- Two-man rule. Requires two people with two unique passcodes to be present at the time of opening.
- Early ambush. Allows users to verify that the facility is safe by requiring two passcodes. The control panel sends a duress event if the user does not enter the passcode a second time after inspecting the premises.
- Dual authentication. Requires two forms of identification before processing certain system commands, including turning off the system and opening doors. A standard system user must have a passcode, a credential (token or card), and appropriate command authority permissions.

Door control
Using the B901 Access Control Module or D9210C Access Control Interface Module, the control panel provides a fully supervised access control solution. The solution offers 14 programmable levels of access authority. Authority for door access is controlled by the user level, the group of the user, the time of day, the door state, and the area armed (On/Off) state.

Easy exit control
The control panel changes from one On (armed) state to another without turning off (disarming) the system. For example, if you change the state from Part On (Perimeter Arm) to All On (Master Arm), the control panel complies and reports the change. Easy exit control reduces the number of keystrokes, simplifying system operation.

Programmable passcode-controlled menu list
Passcode-controlled shortcuts provide users only with the options and information pertinent to them, simplifying system operation.

Flexible control
The system provides the flexibility to choose added convenience or high security. For example, you can restrict to a keypad's immediate local area turning on (arming) and turning off (disarming) the system with a passcode, even if the user has access to other areas. This is particularly useful for high security areas, where a user may have access to the area, but would prefer to only turn off (disarm) the area individually rather than with the rest of the system.

Monitor Delay/Delayed Response
Create a special point profile that delays the reaction of a point for a specified time (up to 1 hour in minutes and seconds). This delay provides time for the specified condition to reset before activating any

annunciation. The system can annunciate locally and send a report, if desired. When the system is armed, the point can respond like a normal point - providing dual functionality. Use this feature to ensure that perimeter doors have not been propped open, or to monitor critical areas such as computer rooms and safes, for example.

System users
The system supports up to 500 users. Each user can have a personalized passcode, a wireless keyfob, and an access credential to control the system. You can assign passcodes to one of 14 customized authority levels in each area that can be restricted to operate only during certain times. You can program a primary and secondary language for each user and by keypad (select from English, Chinese, French, Greek, Hungarian, Italian, Polish, Portuguese, and Spanish). The keypad changes to the user's programmed language when the user enters his passcode or holds the Help key.

Route groups and destinations
The control panel can send reports to four different route groups using one primary and up to three backup destination devices for each route group.

Reporting capabilities
The control panel has flexible communications for most central station receivers with reporting capabilities such as:
- Individual point numbers
- Opening or closing reports by user and area number
- Remote programming attempts
- Diagnostic reports

Destination test
It is possible to send test reports to each and all destinations within each route group.

Communication formats
The control panel sends reports in these formats:
- Contact ID (PSTN)
- Modem4 (PSTN)
- Conettix Modem4
- Conettix ANSI-SIA Contact ID
- ANSI-SIA DC-09

Notice
UL and ULC LISTED applications
ANSI-SIA DC-09 format is not available for UL and ULC LISTED applications.

IP communication
The control panel can use IP to communicate with a CONETTIX B6800 Central Station Software Receiver, a CONETTIX D6600 or a CONETTIX D6100 IPv6 communications receiver/gateway. Use one of the following for IP:
- The on-board Ethernet connection
- Ethernet Communication Module: B426
- Plug-in cellular communicator: B444-G/B444-A/B444-V/B444-A2/B444-V2

Conettix IP communication provides a secure path that includes anti-replay/anti-substitution features, and enhanced security with up to AES 256-bit encryption (using Cipher Block Chaining (CBC)).
The control panel supports Domain Name System (DNS) for both remote programming and central station communication. DNS provides ease of use, eliminating the need to use static IP addresses as your reporting destination, and accommodates a simple solution for central station disaster recovery.
The control panel supports both IPv6 and IPv4 networks.

Communication paths
The control panel accommodates up to four separate phone and four separate network paths to the central station receiver. When resetting alarms or turning a system on and off, the user is identified by name and number.

Personal notification
The control panel can send text messages and emails for personal notification over Ethernet or using a cellular communicator. You can configure up to 32 destinations using a combination of cellular phone numbers and email addresses. The control panel sends notifications in the user's programmed primary language.

Firmware updates
Remote firmware updates are available. Alternatively, the firmware can be updated on-site using a USB stick containing the new panel firmware version.

A wide variety of input options
Each point:
- Single 1 kΩ, single 2 kΩ, dual 1 kΩ (1 kΩ + 1 kΩ), and No EOL (end-of-line) (EOL) resistor options (for on-board and B208 inputs)
- Programmable for Fire, Intrusion, Access, Gas, MNS, and Supervisory devices
- Supports hardwired and wireless devices
- Supports IP cameras by Bosch as point and output devices
- Can be defined as perimeter or interior to support Part On (Perimeter only) arming.

IP camera support
The control panel can integrate directly with Bosch IP cameras, using them as fully supervised points and outputs.
Integration of cameras allows the camera's video motion detection to activate points on the control panel. The IP Camera Point Source now includes two wired inputs of an IP camera. The control panel's virtual outputs (IP camera output source) can be configured to trigger camera actions, including sending video snapshots via email.

Security and fire detection
The control panel provides eight on-board points, and up to 91 additional off-board points (depending on model and expansion interfaces). You can program individual points to monitor some types of burglar alarms, fire alarms, and supervision devices.

Event log
The event log stores up to 2048 local and reported events. The event log includes time, date, event, area, point, and user. View the event log from a keypad or use RPS to remotely retrieve event information. When the event log reaches a programmed threshold of stored events, it can send an optional report to a receiver.

Scheduled events (SKEDs)
The internal clock and calendar start individually scheduled events (SKEDs). SKEDs perform several functions such as turn on or off, relay control, or point bypassing.
The control panel offers:
- 40 scheduled events with up to 31 different functions
- 8 opening windows and 8 closing windows
- 8 user group windows
- Day-of-week, date-of-month, or holiday only schedules
- 4 holiday schedules of 366 days (leap year)

Dual bus
The dual SDI2 device bus design provides greater installation flexibility, such as bus isolation for Intrusion and Fire.

ZONEX and POPEX retrofits
To retrofit legacy Bosch control panels that use ZONEX and POPEX devices, the control panel is compatible with the B600 Retrofit (ZONEX) Module. The B600 adds two ZONEX buses to the control panel which can connect to existing legacy point bus (POPEX) devices (for example, the D8125).

Programming
Installers can perform limited programming on-site with a keypad (critical parameters; such as account IDs, central station and RPS IP addresses and phone numbers, reporting formats, and more). They can also do full programming on-site or remotely (attended or unattended) with RPS. A programmable system passcode prevents unauthorized remote programming.
The following table shows the available languages for RPS

	RPS programming	RPS custom text*
English	✔	✔
Dutch		✔
French		✔
German		✔
Hungarian		✔
Italian		✔
Portuguese		✔
Spanish		✔
Swedish		✔

* RPS custom text is text, that can be entered in RPS and which will then be displayed on keypads and on the mobile app.

Diagnostics
Keypads and RPS offer diagnostic help for monitoring and troubleshooting. The diagnostics features allow you to view the status of the wired and wireless devices. The features provide the status of the control panel and its connected devices, such as firmware version, power, and missing conditions. View the status of each area.

3rd Party Integrations
The control panel provides options for integration with software applications and solutions. Depending on the application, options include a Bosch SDK, RPS-API, Bosch proprietary MODE 2 or OPC interface. The OPC interface enables key DA (Data Access) and AE (Alarms & Events) to integrate with the Bosch BIS solution or 3rd party OPC Classic systems.

Bosch Video Management System integration
With Bosch Video Management System (Bosch VMS) and an intrusion system, the VMS operator has a single user interface to monitor and control the intrusion system combined with video surveillance. With Bosch VMS and a control panel, the operator can, for example:
- View videos triggered by intrusion events, including all relevant information such as areas, point, and user show in the display with the event.
- View areas, points, outputs, and doors - with their statuses - on the Bosch VMS map, providing the exact location in the system.
- Turn on (arm) and turn off (disarm) areas.
- Bypass and unbypass points.
- Lock and unlock doors (Bosch VMS 6.0 and higher).

Requirements to integrate Bosch VMS with a control panel:
- A licensed Bosch VMS system using Professional Editions v5.5 or higher or Bosch VMS Enterprise Edition v5.5 or higher.

- Expansion license to integrate the intrusion control panel. One license needed per control panel. Order number MBX-XINT-xx for the expansion license added to a Bosch VMS base license. Refer to the Bosch Video Management Software product page on the Bosch website, www.boschsecurity.com.
- Access to the control panel account and Remote Programming Software (RPS).

Bosch Security Manager Mobile App
The Bosch Security Manager app allows users to control their security systems remotely from their smart devices. Users can:

- Easily view their system's status at a glance via the advanced and colorful design of the app
- Turn the security system On or Off (either the entire system or specific areas)
- Receive and filter event-driven push notifications
- View full event history for their system
- Add, edit, and delete users in their system
- Control outputs and doors
- View live video from Bosch IP cameras
- Access their panels from any device just by logging into the app with a Bosch ID (panels are now linked to an account and not a device)

Full functionality requires panel firmware 3.10 or higher and integration with the new Installer Services Portal. App users must have a valid email account and must be invited to the app by their Bosch certified dealer.
For those without access to the Installer Services Portal, Remote Security Control will remain available.

Installer Services Portal (North America)
The Installer Services Portal offers secure and easy access for managing Bosch cloud and cellular communication services for remote programming and alarm reporting. The Bosch Cloud Remote Connect service eliminates the need to change local router settings, firewall rules or to use Domain Name Service (DNS). In addition to seamless integration with RPS for remote programming, the Remote Connect service fully supports the Bosch Security Manager mobile app.

UL2050 (SCIF) Support
The B8512G can be used in UL2050 SCIF applications. Validation numbers 4342 and 2332 can be found on the NIST Advanced Encryption Standard Algorithm Validation List.

Regulatory information

Region	Regulatory compliance/quality marks	
USA	ANSI-SIA	CP-01-2010-Control Panel Standard - Features for False Alarm Reduction
Europe	CE	EMC, LVD, RoHS
Brazil	ANATEL	04450-16-01855
USA	CSFM	California State Fire Marshal
	FCC	Part 15 Class B
	FDNY-CoA	Fire Department of New York City [B9512G, B8512G]
	FM	Central Station
	FM	Local Protective Signaling
	FM	Remote Station
Canada	IC	ICES-003 - Information Technology Equipment (ITE)
Australia	RCM	Regulatory Compliance Mark
	RCM	Regulatory Compliance Mark
	RCM	ACMA
USA	UL	Underwriters Laboratories
	UL	UL 294 - Standard for Access Control Units and Systems
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 636 - Holdup Alarm Units and Systems
	UL	UL 864 - Standard for Control Units and Accessories for Fire Alarm Systems (10th edition)
	UL	UL 985 - Household Fire Warning System Units (6th edition)
	UL	UL 1023 - Household Burglar Alarm System Units
	UL	UL 1076 - Proprietary Burglar Alarm Units and Systems
	UL	UL 1610 - Central Station Burglar Alarm Units
	UL	UL 1635 - Standard for Digital Alarm Communicator System Units
	UL	UL 2572 - Standard for Mass Notification Systems
Canada	ULC	Underwriters Laboratories of Canada

Region	Regulatory compliance/quality marks	
	ULC	CAN/ULC S303 - Local Burglar Alarm Units and Systems
	ULC	CAN/ULC S304 - Standard for Signal Receiving Center and Premise Burglar Alarm
	ULC	CAN/ULC S545 - Residential Fire Warning System Control Units
	ULC	CAN/ULC S559 - Fire Signal Receiving Centres and Systems
	ULC	ULC-ORD C1023 - Household Burglar Alarm System Units
	ULC	ULC-ORD C1076 - Proprietary Burglar Alarm Units and Systems

Installation/configuration notes

Notice

Not all products and features are available in all regions. Consult your local Bosch representative for availability details.

Compatible products

Keypads

B915/B915I Basic Keypad (SDI2)

B920 Two-line Alphanumeric Keypad (SDI2)

B921C Two-line Capacitive Keypad (SDI2)

B925F Fire Keypad (SDI2)

B926F Fire Keypad (SDI2)

B926M Mass Notification Keypad (SDI2)

B930 ATM Style Alphanumeric Keypad (SDI2)

B940W Touch screen KP, White (SDI2)

B942/B942W Touch Screen Keypad (SDI2)

Power

D1640 16.5 VAC 40 VA Transformer

DE-45-18 Transformer

TR1850 18 VAC 50 VA Transformer

D126 Standby Battery (12 V, 7 Ah)

D1218 Battery (12 V, 18 Ah)

D122 Dual Battery Harness

D122L Dual Battery Harness with Long Leads

Enclosures

B18 Large Universal Enclosure (White)

B8103 Universal Enclosure (White)

D137 Accessory mounting bracket for enclosure

D8103 Universal Enclosure (Gray)

D8108A Attack Resistant Enclosure

D8108A-CE Attack Resistant Enclosure with Built-in Transformer

D8109 Fire Enclosure

Accessories

B56 Keypad Surface Mount Box

B96 Keypad Trim Bezel

B99 USB Direct Connect Cable

B501-10 Interconnect wiring cables (pack of 10)

D161 Dual Modular Telephone Cord (7 f)

D162 Modular Telephone Cord (2 ft)

D166 Telephone Jack (RJ31X)

Detectors

D7050 Series Addressable Photoelectric Smoke and Smoke Heat Detector Heads

FAA-350 Detector base, 6”, POPIT

F220-B6PM/S 12/24 VDC Addressable Detector Bases with POPITs

F220-B6 12/24 VDC Two-wire Base

F220-B6R Standard 12/24 VDC Four-wire Base)

F220-P Photoelectric Smoke Detector

F220-PTH Photoelectric Smoke Detector with +135°F (+57°C) Heat Sensor

F220-PTH Photoelectric Smoke Detector with +135°F (+57°C) Heat Sensor and Carbon Monoxide Sensors

F220-B6C 12/24 VDC Four-wire Base with Auxiliary Form C Relay

FCC-380 Carbon Monoxide Detector

FCH-T320 Heat Detector

FCP-OT320 Multisensor Detector Optical/Thermal

FCP-O320 Optical Smoke Detector

MX775i Addressable PIR Detector

MX794i Long Range Multiplex PIR Detector

MX934i Addressable PIR Detector

MX938i Addressable PIR Detector

ZX776Z PIR Detector

ZX794Z Long Range PIR Detector

ZX835 TriTech Microwave/PIR Detector

ZX935Z PIR Detector

ZX938Z PIR Detector

ZX970 PIR/Microwave Detector

Bosch conventional detectors, including Professional Series, Blue Line Gen2, Blue Line, Classic Line, Commercial Line, and Ceiling Mount motion detectors, as well as glass break, seismic, request-to-exit, photoelectric, heat, and smoke detectors.

Modules

B201 2-Wire Powered Loop Module

B208 Octo-input Module

B299 POPEX Module

B308 Octo-output Module

B426 Conettix Ethernet Communication Module

B430 Plug-in Telephone Communicator

B444-A/A2 Plug-in cell module, AT&T LTE

B444-V/V2 Plug-in cell module, Verizon LTE

B444-G Plug-in cell module, global LTE

B450 Conettix Plug-in Communicator Interface

B520 Auxiliary Power Supply Module

B600 Retrofit (ZONEX) Module

B810 wireless receiver (RADION)

B820 SDI2 Inovonics Interface Module

B901 Access Control Module

Applications

Remote Programming Software (RPS or RPS-LITE) v6.03 and higher

Bosch Video Management System v5.5 and higher

Bosch Security Manager

Conettix receivers

CONETTIX B6800 Central Station Software Receiver

Conettix D6600 Communications Receiver/Gateway (with only D6641 line cards installed) with CPU version 01.10.00

Conettix D6100IPv6 Communications Receiver/Gateway with CPU version 61.10.00

Conettix D6100i Communications Receiver/Gateway with CPU version 61.10.00

RADION wireless from Bosch

B810 wireless receiver (RADION)

RFBT-A/RFBT bill trap

RFDL-11-A/RFDL-11 TriTech motion detector

RFDW-RM-A/RFDW-RM recessed mount door/window contact

RFDW-SM-A/RFDW-SM surface mount door/window contact

RFGB-A/RFGB glass break detector

RFKF-A/RFKF two-button keyfob

RFKF-FBS-A/RFKF-FBS four-button keyfob

RFKF-TBS-A/RFKF-TBS two-button keyfob

RFPB-SB-A/ RFPB-SB single-button panic

RFPB-TB-A/RFPB-TB two-button panic

RFRP-A/RFRP repeater

RFHT-A Wireless heat detector

RFSM2-A Wireless smoke detector

RFCO-A Wireless CO detector

RFPR-12-A/RFPR-12 PIR motion detector

RFPR-C12-A/RFPR-C12 PIR curtain motion detector

RFUN-A/RFUN universal transmitter

Inovonics Wireless

B820 SDI2 Inovonics Interface Module

ENKIT-SDI2 SDI2 Inovonics Interface and Receiver Kit. Includes B820 and EN4200

EN1210 Universal Transmitter (Single-input)

EN1210EOL Universal Transmitter with EOL Resistor

EN1210W Door-Window Transmitter with Reed Switch

EN1215EOL Universal Transmitter with Wall Tamper, Reed Switch, and EOL Resistor

EN1223D Water-resistant Pendant Transmitter (Double-button)

EN1223S Water-resistant Pendant Transmitter (Single-button)

EN1224-ON Multiple-Condition Pendant Transmitter

EN1233D Necklace Pendant Transmitter (Double-button)

EN1233S Necklace Pendant Transmitter (Single-button)

EN1235D Beltclip Pendant Transmitter (Double-button)

EN1235DF Fixed-location Transmitter (Double-button)

EN1235S Beltclip Pendant Transmitter (Single-button)

EN1235SF Fixed-location Transmitter (Single-button)

EN1247 Glass-break Detector Transmitter

EN1249 Bill Trap Transmitter

EN1242 Smoke Detector Transmitter

EN1260 Wall Mount Motion Detector

EN1261HT High Traffic Motion Detector

EN1262 Motion Detector with Pet Immunity

EN1265 360° Ceiling Mount Motion Detector

EN4200 Serial Receiver

EN5040-T High Power Repeater with Transformer

Parts included

Quantity	Component
1	Control panel
1	Hardware pack
1	Literature pack • UL Installation Guide • ULC Installation Guide • Owner's Manual • Release Notes • SIA Quick Reference Guide
1	Literature CD containing product literature

Technical specifications

Capacity

Number of points	99
Number of areas	8
Number of events	2,048
Number of users	501
Number of outputs	93
Number of on-board outputs	3
Number of custom functions	8
Number of SKEDs	40
Number of IP cameras	8

Electrical

Current consumption (mA)	180 mA – 260 mA
Input voltage (VAC)	16.50 VAC – 18 VAC
Maximum auxiliary output current (mA)	1,400 mA
Nominal voltage (VDC)	12 VDC
Output current (A)	0 A – 2 A

Environmental

Operating temperature (°C)	0 °C – 49 °C
Operating temperature (°F)	32 °F – 120 °F

Operating relative humidity, non-condensing (%)	5% – 93%
Mechanical	
Color	Black
Dimensions (H x W x D) (cm)	26.99 cm x 19.69 cm x 4.76 cm
Dimensions (H x W x D) (in)	10.6250 in x 7.75 in x 1.8750 in
Dimensions (H x W x D) (mm)	269.90 mm x 196.90 mm x 47.60 mm
Weight (g)	880 g
Weight (kg)	0.88 kg
Weight (lb)	1.95 lb
Network	
Ethernet type	10/100BASE-T

Ordering information

B8512G IP control panel, 8 areas, 99 points
Supports up to 99 points, 3 on-board outputs, and 8 areas for intrusion, commercial fire. On-board Ethernet.
Order number **B8512G | F.01U.296.327 F.01U.390.775 F.01U.396.919 F.01U.416.974**

Accessories

B520 Auxiliary power supply module, 2A 12V
Provides auxiliary power to 12 VDC devices or to SDI2 modules.
Order number **B520 | F.01U.172.941**

B208 Expansion module, SDI2, 8-input
Provides 8 programmable inputs.
Order number **B208 | F.01U.397.024**

B308 Expansion module, SDI2, 8-output
Provides 8 programmable relays.
Order number **B308 | F.01U.397.025**

B901 Door Controller
Fully supervised, addressable SDI2/SDI bus device that allows access control integration for Bosch G and B Series Control Panels.
Order number **B901 | F.01U.323.803**

B810 Wireless SDI2 bus interface
Receives RF signals from RADION transmitters, repeaters, and glassbreaks. Operates at 433.42 MHz. For use with compatible SDI2 bus control panels.
Order number **B810 | F.01U.323.799 F.01U.383.394**

D122 Dual battery harness
Harness with circuit breaker. Connects two batteries (in parallel) to a compatible control panel.
Order number **D122 | 4.998.800.378**

D122L Dual battery harness, long
Harness with circuit breaker and leads measuring 35 in. (89 cm). Connects two batteries (in parallel) to a compatible control panel in a separate enclosure.
Order number **D122L | 4.998.140.606**

D126 Battery, 12V 7Ah
A rechargeable sealed lead-acid power supply used as a secondary power supply or in auxiliary or ancillary functions.
Order number **D126 | 4.998.125.825**

D1218 Battery, 12V 18Ah
The D1218 is a 12 V 18 Ah sealed lead-acid battery with two bolt-fastened terminals. It is used for standby and auxiliary power. It connects to a compatible control panel using a D122 or D122L Dual battery harness.
Order number **D1218 | 4.998.125.820**

D137 Accessory mounting bracket for enclosure
Used to mount accessory modules in B8103, D8108A, and D8109 enclosures.
Order number **D137 | F.01U.020.521**

D1640 Transformer plug-in, 16V 40VA
System transformer rated at 16.5 VAC, 40 VA.
Order number **D1640 | 4.998.125.832**

D1640-CA Transformer, plug-in, 16V 40VA, Canada
For use in Canada. System transformer rated at 16.5 VAC, 40 VA.
Order number **D1640-CA | F.01U.270.316**

D9002-5 Mounting plate, 6 location 3-hole, 5 pcs
5 pack of mounting skirts for B8103, D8103, D8108A, and D8109 enclosures. Each skirt can hold up to six standard 3-hole mounting modules.
Order number **D9002-5 | F.01U.217.699**

D101 Enclosure lock and key set
Short-body lock set with one key supplied. Uses the D102 (#1358) replacement key.
Order number **D101 | 4.998.800.200**

D110 Tamper switch for enclosure, 2pcs
Screw-on tamper switch that fits all enclosures. Shipped in packages of two.
Order number **D110 | 4.998.137.947 F.01U.246.707**

ICP-EZTS Dual tamper switch
Combination tamper switch with a wire loop for additional tamper outputs.
Order number **ICP-EZTS | F.01U.217.038**

B8103 Universal enclosure, white
White steel enclosure measuring 41 cm x 41 cm x 9 cm (16 in. x 16 in. x 3.5 in.).
Order number **B8103 | F.01U.300.149**

D8108A Attack resistant enclosure, large
Grey steel enclosure measuring 41.5 cm x 41.5 cm x 9 cm (16 in. x 16 in. x 3.5 in.).
UL Listed. Includes a lock and key set.
Order number **D8108A | 4.998.125.920**

D8109 Fire enclosure, 16x16x3.5", red
Red enclosure, 16in. x 16in. x 3.5in. (41cm x 41cm x 9cm), 16 gauge (1.5mm) cold-rolled steel, full-length hinge, D101F lock and 2 D102F keys, UL Listed for commercial fire/burglary applications.
Order number **D8109 | 4.998.800.205**

D8004 Transformer enclosure kit, grey
For applications that might require a remote transformer in an enclosure. Can be used with B Series control panels and D9412GV4/D7412GV4 control panels.
Order number **D8004 | 4.998.140.404**

BATB-40 Battery box/enclosure, 22x21x7.25"
22 x 20.75 x 7.25" (56 x 53 x 18.5 cm). Holds two dry or wet cell batteries. Optional BATB-SHELF battery shelf increases number of batteries. Suitable for residential/commercial fire or burglary applications.
Order number **BATB-40 | 4.998.137.930 F.01U.415.596**

BATB-80 Battery box/enclosure, 22x21x7.25"
22 in. x 20.75 in. x 7.25 in. (55.9 cm x 52.7 cm x 18.4 cm). Battery box/enclosure with shelf holds up to four dry or wet cell batteries. Suitable for residential/ comercial fire or burglary applications.
Order number **BATB-80 | 4.998.137.931**

B99 USB direct connect cable
Male A to Male A USB cable for local programming of control panels with on-board USB ports.
Order number **B99 | F.01U.278.853**

B915 Basic Keypad
Two-line alphanumeric basic keypad with language function keys.
Available languages: English, Chinese, Dutch, French, German, Greek, Italian, Hungarian, Polish, Portuguese, Spanish, Swedish.
Order number **B915 | F.01U.323.784 F.01U.385.667**

B915I LCD keypad, icon keys, SDI2
Two-line alphanumeric basic keypad with icon function keys.
Available languages: English, Chinese, Dutch, French, German, Greek, Italian, Hungarian, Polish, Portuguese, Spanish, Swedish.
Order number **B915I | F.01U.385.666 F.01U.315.437**

B920 2 Line Alpha Numeric Keypad (SDI2)
Two-line alphanumeric keypad
Available languages: English, Dutch, French, German, Hungarian, Italian, Portuguese, Spanish, Swedish.
Order number **B920 | F.01U.323.785 F.01U.385.668**

B921C Two-line Keypad w/Touch keys, Inputs
Two-line alphanumeric keypad with inputs and capacitive touch keys in black.
Available languages: English, Dutch, French, German, Hungarian, Italian, Portuguese, Spanish, Swedish.
Order number **B921C | F.01U.323.786 F.01U.385.734**

B930 ATM Style-Alpha Numeric Keypad (SD12)
Five-line ATM style alphanumeric keypad
Available languages: English, Dutch, French, German, Hungarian, Italian, Portuguese, Spanish, Swedish.
Order number **B930 | F.01U.323.787 F.01U.385.669**

B940W Slim Touch Keypad
SDI2 compatible touch screen keypad with function keys.
Available languages: English, Chinese, Dutch, French, German, Greek, Italian, Hungarian, Polish, Portuguese, Spanish, Swedish.
Order number **B940W | F.01U.358.360**

B942 Touch Screen KP Prox/Input/Output, black
Black SDI2 touch screen keypad with inputs and one output.
Available languages: English, Chinese, Dutch, French, German, Greek, Italian, Hungarian, Polish, Portuguese, Spanish, Swedish.
Order number **B942 | F.01U.323.788**

B942W Touch screen KP, prox/input/output,white
White SDI2 touch screen keypad with inputs and one output.
Available languages: English, Chinese, Dutch, French, German, Greek, Italian, Hungarian, Polish, Portuguese, Spanish, Swedish.
Order number **B942W | F.01U.323.789**

B925F Fire and intrusion keypad, SDI2
Two-line alphanumeric fire and intrusion keypad.
Order number **B925F | F.01U.303.219 F.01U.382.454**

B926F Fire keypad, SDI2
Two-line alphanumeric fire keypad
Order number **B926F | F.01U.382.455**

B426 Ethernet Communication Module
Supports two-way communications over Ethernet networks for compatible control panels
Order number **B426 | F.01U.324.383 F.01U.414.222**

B442 Plug-in cellular module, GPRS
Multi-function cellular communicator that provides IP communication over a (GPRS) cellular network
Order number **B442 | F.01U.283.090 F.01U.385.514**

B443 Plug-in Cellular, HSPA+ (3G+)
Multi-function 3G/4G cellular communicator providing IP communication over a GPRS/EDGE/UMTS/HSPA+ cellular network
Order number **B443 | F.01U.323.796 F.01U.385.515**

B444 Plug-in cellular module, VZW LTE, hot
Pre-activated 4G LTE cellular communicator for secure two-way IP communication on the Verizon Wireless LTE network.
Order number **B444 | F.01U.335.089**

B444-C Plug-in cell module, VZW LTE, cold
Non-activated 4G LTE cellular communicator for secure two-way IP communication on the Verizon Wireless LTE network.
Order number **B444-C | F.01U.349.007**

B444-A Plug-in cell module, AMEC LTE
This communication module provides secure two-way IP communication on North American wireless networks. Only available in Canada.
Order number **B444-A | F.01U.385.518**

B444-V Plug-in cell module, VZW LTE
This communication module provides secure two-way IP communication on the Verizon Wireless network.
Order number **B444-V | F.01U.385.517**

B926M Mass notification keypad, SDI2
Fully supervised SDI2 keypad for Mass Notification Systems and fire applications.
Order number **B926M | F.01U.391.460**

Software Options

D5500C-USB Kit with DVD and USB security dongle
Remote Programming Software (RPS) with USB security key (dongle).
Order number **D5500C-USB | 4.998.143.724**

Services

EWE-GSERIE-IW 12 mths wrty ext G Series panel
12 months warranty extension
Order number **EWE-GSERIE-IW | F.01U.352.287**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Tel.: +49 (0)89 6290 0
Fax:+49 (0)89 6290 1020
de.securitysystems@bosch.com
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

© Bosch Security Systems 2023

B8103 Universal enclosure, white

www.boschsecurity.com

BOSCH
Invented for life

- Easy-to-install standoff location for mounting supported modules
- Made with cold-rolled steel with a white semi-gloss finish
- Easy access locations for battery placement
- Optional tamper switch mounting location

The enclosure houses many control panels and modules by Bosch. It is compatible with an enclosure tamper switch and can hold up to two batteries. Use the enclosure for residential fire and burglary installations and commercial burglary applications that do not require attack resistance.

Certifications and approvals

Region	Regulatory compliance/quality marks	
USA	UL	UL 294 - Standard for Access Control Units and Systems
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 864 - Standard for Control Units and Accessories for Fire Alarm Systems
	UL	UL 985 - Household Fire Warning System Units
	UL	UL 1023 - Household Burglar Alarm System Units
	UL	UL 1610 - Central Station Burglar Alarm Units
	UL	UL 1635 - Standard for Digital Alarm Communicator System Units
	UL	S1871-19850314-CertificateofCompliance
	CSFM	see www.boschsecurity.com (the Bosch website)
	FDNY-CoA	6196
Canada	ULC	CAN/ULC S303 - Local Burglar Alarm Units and Systems
	ULC	CAN/ULC S304 - Standard for Signal Receiving Center and Premise Burglar Alarm
	ULC	ULC-ORD C1023 - Household Burglar Alarm System Units
	ULC	[D8108A, D8108AH, D8109, D8109G, D8109H, D8109L,B8103, D8103, B12, B10, B10R, B11, B11R

Installation/configuration notes

Compatible locksets
D101 (Key #1358)
D101F (Key #203)

Compatible tamper switches
D110
ICP-EZTS

Parts included

Quantity	Component
1	Enclosure
1	Hardware pack
1	Literature pack

Technical specifications

Dimensions	41 cm x 41 cm x 9 cm (16 in. x 16 in. x 3.5 in.)
Weight	4.5 kg (10 lb)
Material	Cold-rolled steel
Color	White

Ordering information

B8103 Universal enclosure, white
White steel enclosure measuring 41 cm x 41 cm x 9 cm (16 in. x 16 in. x 3.5 in.).
Order number **B8103**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

© Bosch Security Systems 2019 | Data subject to change without notice
18395968139 | en, V19, 16. May 2019

B444-V Plug-in cell module, VZW LTE

www.boschsecurity.com

BOSCH
Invented for life

- Secure Conettix IP communication from compatible Bosch panels to Bosch receivers using Verizon LTE cellular network
- Remote programming and monitoring of compatible Bosch panels
- E-mail notification options
- Direct configuration from Bosch Remote Programming Software (RPS) eliminates the need for separate set-up
- Simple LED status information and advanced keypad diagnostics available with easy two-step plug-in installation, troubleshooting, and maintenance

The cellular communicator enables secure two-way IP communication over the cellular network by plugging into a compatible control panel or communicator interface.

- Alarm reporting to a central station
- Remote control panel programming through Remote Programming Software with supported control panels
- Remote monitoring and control through a mobile application with supported control panels
- Personal notification using SMS for compatible control panels

Notice
Cellular capability requires an Installer Services account and appropriate data plan.

System overview

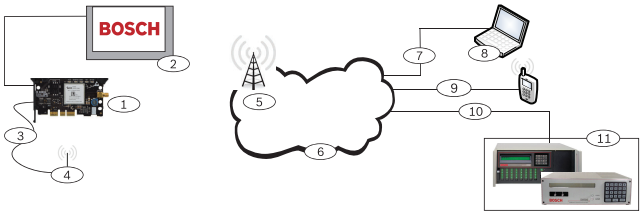

Callout — Description	Callout — Description
1 — Cellular communicator	7 — Remote PC's network connection
2 — Compatible control panel/ communicator interface	8 — Remote PC running RPS
3 — Antenna cable	9 — Personal SMS notification
4 — Magnetic base antenna	10 — Ethernet connection
5 — Base station on wireless carrier's network	11 — Central monitoring station
6 — IP network cloud	

Functions

Conettix IP communication via cellular
In addition to the security provided by the network operator, the cellular communicator uses our Conettix IP protocol that supports:
- Flexible polling intervals
- Resistance to Denial of Service attacks
- 128-bit to 256-bit AES encryption with Cypher Block Chaining
- Anti-replay/anti-substitution keys

Easy installation, troubleshooting, and maintenance
- No networking expertise required at field site (no firewall or router settings)
- Signal strength and diagnostics available through keypad and Remote Programing Software (RPS)
- Diagnostic LEDs for on-site troubleshooting

SMA antenna connections
Each module uses a two-port antenna connection and uses two SMA antennas to maximize cellular communications.

LED	Function
Blue (heartbeat)	System status indicator
Red	Unacceptable signal strength
Yellow	Marginal signal strength
1 Green	Good signal strength
2 Green	Very good signal strength

Remote programming of Bosch control panels
The cellular communicator supports secure RPS programming of compatible Bosch control panels.

Remote Connect Programming Service support
Remote Connect Programming Service enables a secure control panel connection to RPS using Bosch Cloud services. The service allows a secure TLS connection to a control panel without specific port and router settings and without a static IP or DNS.

Personal notification and control
The cellular communicator supports the Bosch Remote Security Control mobile application and can be configured for personal notification reports to mobile phones or e-mail addresses.

Certifications and approvals

Region	Certification	
USA	Verizon	Open Development Certified
	UL	CP-01-2010 Control Panel Standard - Features for False Alarm Reduction

Region	Regulatory compliance/quality marks	
USA	UL	UL 864 - Standard for Control Units and Accessories for Fire Alarm Systems (10th edition)
	UL	UL 1076 - Proprietary Burglar Alarm Units and Systems
	UL	UL 1610 - Central Station Burglar Alarm Units
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 636 - Holdup Alarm Units and Systems
	UL	UL 985 - Household Fire Warning System Units (6th edition)
	UL	UL 1023 - Household Burglar Alarm System Units
	UL	UL 1635 - Standard for Digital Alarm Communicator System Units
	FCC	Part 15 Class B
Canada	ULC	Underwriters Laboratories of Canada S1871-20121210

Installation/configuration notes

Mounting considerations
The module plugs into any compatible control panel, available in a variety of enclosures.

Wiring considerations
The module connects to any compatible control panel without tools or physical wiring for power. When used with the B450, the B450 is wired to the control panel data bus. The cellular module has a screw on SMA antenna connection.

Compatibilities

Devices	B9512G/B9512G-E, B8512G/B8512G-E B6512/B5512/B4512/B3512, B5512E/B4512E/B3512E control panel with firmware v3.09 or higher (direct insertion) The module is compatible with most Bosch control panels when used with a B450 Conettix Plug-in Communicator Interface with firmware v3.09 or higher. Refer to the B450 datasheet for complete control panel compatibility listings. B465 Conettix Universal Dual Path Communicator with firmware v2.09 or higher. B40-P, B40-MB25, B40-MB50 auxiliary indoor/outdoor antennas
Cellular	4G LTE - Cat 1 with 3G fallback

Commercial Fire and Burglary applications
Approved for Commercial Fire/Burglary applications as sole, primary, or secondary communications path when the system is installed to the NFPA-72 specification

Parts included

Quantity	Component
1	Cellular module
2	Antennas
1	Literature pack

Technical specifications

Electrical

Current (operating)	Standby: 35 mA Alarm: 100 mA
Voltage (operating)	12 VDC nominal
Radio	Verizon LTE CAT 1, Bands 2, 4, 5 and 13

Environmental

Environment	Environmental Class III - Indoor
Relative humidity	5 - 93% at +32°C (+90°F) non-condensing
Operating temperature	0°C to +49°C (+32°F to +120°F)

Mechanical

Board dimensions	2 in x 3.68 in x 0.60 in (50 mm x 93.5 mm x 15.25 mm)
Antennas (included)	• Magnetic base omni-directional • 3.3 ft (1.0 m) cable with SMA connector
SIM card	• Verizon SIM

Ordering information

B444-V Plug-in cell module, VZW LTE
This communication module provides secure two-way IP communication on the Verizon Wireless network.
Order number **B444-V**

Accessories

B40-MB25 Outdoor multiband antenna, cell, 25ft
Provides wide bandwidth and low angle radiation pattern for indoor/outdoor applications. Supports 2G/3G/4G data communication, Domestic (US) LTE 700 band, Global LTE 2600 band, Domestic (US) Cellular, Global GSM, and WiMAX 2300/2500/2600 bands. Includes a 25 ft (7.6 m) cable, and a mounting bracket.
Order number **B40-MB25**

B40-MB50 Outdoor multiband antenna, cell, 50ft
Provides wide bandwidth and low angle radiation pattern for indoor/outdoor applications. Supports 2G/3G/4G data communication, Domestic (US) LTE 700 band, Global LTE 2600 band, Domestic (US) Cellular, Global GSM, and WiMAX 2300/2500/2600 bands. Includes a 50 ft (15.2 m) cable, and a mounting bracket.
Order number **B40-MB50**

B40-P Outdoor puck antenna, cell, 6.5ft
Omnidirectional, low profile antenna for metallic indoor/outdoor surface mounting. Supports LTE, and 2G/3G/4G data communication. Operates over 698-960 MHz and 1710-2170 MHz bands.
Order number **B40-P**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

© Bosch Security Systems 2020 | Data subject to change without notice
69574991243 | en, V2, 25. Jun 2020

D1640 Transformer plug-in, 16V 40VA

www.boschsecurity.com

BOSCH
Invented for life

- System transformer rated at 16.5 VAC, 40 VA
- Suitable for use on approved UL applications in the USA

Certifications and approvals

Region	Regulatory compliance/quality marks	
USA	UL	UOXX: Control Unit Accessories, System (UL864, 9th edition)
	CSFM	California State Fire Marshal (see our website)

Parts included

Quantity	Component
1	Transformer

Technical specifications

Rating	16.5 VAC, 40 VA
Dimensions	3.2 in x 2.8 in x 2.2 in (81 mm x 70 mm x 56 mm)
Color	White

Ordering information

D1640 Transformer plug-in, 16V 40VA
System transformer rated at 16.5 VAC, 40 VA.
Order number **D1640**