

EN5040-T High-power Repeater

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Easy installation; no wires or programming required
- ▶ Supervision for low battery, loss of line power, tamper, and jams
- ▶ Expanded coverage by utilizing multiple repeaters
- ▶ Self-configuring
- ▶ Sophisticated signal management

The line-powered 900 MHz EN5040-T High-power Repeater receives, decodes, and re-transmits signals from Inovonics EchoStream platform transmitters. This technology uses diversity reception and advanced signal processing to reduce dead spots in transmission areas. Each repeater acts as a range expander for any transmission, allowing the installation to scale from smaller commercial sites to large campuses with several buildings. Each repeater includes an on-board, state-of-the-art lithium-ion back-up battery. The EN5040-T High-power Repeater includes a transformer.

System overview

Powered by Inovonics


The Inovonics EchoStream platform, powered by Inovonics wireless mesh network technology, ensures superior range, reliability, and scalability for commercial applications. Using a wide range of transmitters and repeaters, this proven technology provides flexibility and performance to meet the most stringent requirements. This exclusive protocol is available only on Inovonics EchoStream products.

Wireless 900 MHz Band

The Inovonics EchoStream platform sends redundant information on several multi-frequency channels within the FCC Part 15 900 MHz band, providing superior

range and reliability. In comparison, systems that use a single frequency technology can only send information on one narrow band channel. Any interference within the band can cause missed signals. With wireless registration, it is easy to add this technology to any application.

Repeater Network

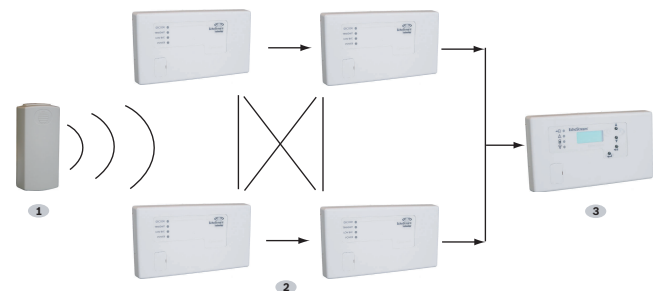

Use multiple repeaters to create a mesh network.

- 1 The transmitter sends a signal.
- 2 Repeaters receive the signal and re-broadcast it, allowing the user to extend the range of the RF system to cover large areas such as installations in campuses, sites with detached buildings, or multiple story complexes.
- 3 The receiver hears the signal from the repeaters and processes accordingly.

Functions

Installation

The installation is as easy as mounting the repeater and plugging it in. No wires or programming are required, although registration is recommended for a fully supervised system.

Supervision and Expansion

The repeater supervises for low battery, loss of line power, case tamper, and jam detection. An on-board lithium-ion battery:

- Provides backup without additional expense
- Offers up to 24 hours of continuous operation when line power is unavailable
- Reports power loss when programmed or supervised to a slave receiver

Installers can employ multiple repeaters in a micro-cellular network, providing coverage for applications including large campuses with multiple-story buildings.

Signal Management

The repeater incorporates sophisticated signal management, preventing ping-pong messages and maximizing reliability.

Certifications and approvals

Inovonics Wireless Corporation also holds the following approvals:

FCC Conforms to FCC Part 15 regulations

Installation/configuration notes

Compatibility Information

The EN5040-T High-power Repeater is compatible with the following products:

Receivers

| | |
|---------|-----------------|
| EN4200 | Serial Receiver |
| EN4204R | LED Receiver |

Transmitters

| | |
|-----------|---|
| EN1210 | Universal Transmitter (Single-input) |
| EN1210EOL | Universal Transmitter with EOL Resistor |
| EN1210SK | Survey Transmitter |
| EN1210W | Door-Window Transmitter with Reed Switch |
| EN1215EOL | Universal Transmitter with Wall Tamper and EOL Resistor |

| | |
|------------|---|
| EN1215WEOL | Door-Window Transmitter with Wall Tamper, Reed Switch, and EOL Resistor |
| EN1223D | Water-resistant Pendant Transmitter (Double-button) |
| EN1223S | Water-resistant Pendant Transmitter (Single-button) |
| EN1223SK | Survey Pendant Transmitter |
| EN1233D | Necklace Pendant Transmitter (Double-button) |
| EN1233S | Necklace Pendant Transmitter (Single-button) |
| EN1235D | Beltclip Pendant Transmitter (Double-button) |
| EN1235S | Beltclip Pendant Transmitter (Single-button) |
| EN1235DF | Fixed-location Transmitter (Double-button) |
| EN1235SF | Fixed-location Transmitter (Double-button) |
| EN1242 | Smoke Detector-Transmitter |
| EN1247 | Glass-break Sensor Transmitter |
| EN1249 | Billtrap Transmitter |
| EN1260 | PIR Motion Sensor-Transmitter (Commercial and High-end Domestic Applications) |
| EN1261HT | PIR Motion Sensor-Transmitter (High-traffic Areas) |
| EN1262 | PIR Motion Sensor-Transmitter (Residential and Low-traffic Commercial Applications) |
| EN1265 | PIR Motion Sensor-Transmitter (Ceiling-mount Applications) |

Parts included

| Quant. | Component |
|--------|--|
| 1 | EN5040-T Repeater |
| 1 | Transformer |
| 1 | Backup battery assembly (BAT850) |
| 1 | Hardware pack |
| 1 | Literature – Installation and Operation Manual |

Technical specifications

Electrical

| | |
|---------------------|----------------------------------|
| Power Requirements: | 14 VAC, 250 mA |
| Backup Battery | |
| • Capacity: | 3.7 VDC nominal, 2.45 Ah |
| • Life: | 24 hours typical |
| • Type: | Rechargeable lithium-ion battery |

Environmental

| | |
|--------------------------|--------------------------------|
| Relative Humidity: | Up to 90%, non-condensing |
| Temperature (operating): | 0°C to +60 C (+32°F to +140°F) |

Mechanical

| | |
|-------------|---|
| Material: | ABS |
| Closure: | Latching with optional screws for high security installations |
| Dimensions: | 165 mm x 89 mm x 25 mm (6.5 in. x 3.5 in. x 1 in.) |
| Weight: | 204 g (7.14 oz) |

Reception/Transmission Characteristics

| | |
|------------|--------------------|
| Frequency: | 902 MHz to 928 MHz |
|------------|--------------------|

Trademarks

Trademark names are used throughout this document. In most cases, these designations are claimed as trademarks or registered trademarks in one or more countries by their respective owners. Rather than placing a trademark symbol in every occurrence of a trademark name, Bosch Security Systems, Inc. uses the names only in an editorial fashion and to the benefit of the trademark owner with no intention of infringing the trademark.

Inovonics is a trademark of Inovonics Wireless Corporation.

Ordering information

EN5040-T High-power Repeater

Line-powered 900MHz EN5040-T High-power Repeater
Order number **EN5040-T**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com