

User Guide

Tapo Smart Light Strip, Multicolor

Tapo L930



Contents

About This Guide	1
Introduction	2
Appearance	3
Set Up Your Light Strip.....	4
Add Your Light Strip to Home	6
Install Your Light Strip.....	8
Basic Device Control.....	10
Configure Your Light Strip.....	11
Smart Actions.....	22
Third-Party Services	25
Reset Your Light Strip.....	27
Authentication.....	28

About This Guide

This guide provides a brief introduction to the Tapo Smart Light Strip and the Tapo app, as well as regulatory information.

Features available in Tapo may vary by model and software version. Tapo availability may also vary by region. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Tapo experience.

Conventions

In this guide, the following convention is used:

Convention	Description
Blue	Key information appears in blue, including management page text such as menus, items, buttons and so on.
<u>Underline</u>	Hyperlinks are in blue and underlined. You can click to redirect to a website.
📌 Note	Ignoring this type of note might result in a malfunction or damage to the device.

More Info

- Specifications can be found on the product page at <https://www.tapo.com>.
- Our Technical Support and troubleshooting information can be found at <https://www.tapo.com/support/>.
- A Technical Community is provided for you to discuss our products at <https://community.tp-link.com>.

Introduction


The Tapo Smart Wi-Fi Light Strip is part of the Tapo smart home family of products, including plugs, switches, cameras and more. Over 16 million vibrant colors and 1000 lumens brightness are available for you to pick from and create your own scenes. Cut it to whatever length you want and attach it to any surface with the 3M adhesive. You can light up walkways, TV setups, bookshelves, bedrooms and so much more.

Whether you use your preferred Tapo app or Smart Voice Assistant, you can control the light strip easily. With Tapo, your home is never more than a few taps away.

- **Custom Color Zones** - Have the lights match your mood, with different color zones to fill the room with lights the way you want it.
- **Connect It Your Way** - Control it directly via your smart assistants or Tapo App. Connect the Light Strip to the Tapo Hub to create useful sensor-activated lighting effects, like night lights.
- **Whiter Whites for General Lighting** - Appreciate high-lumen white lighting of the brightest & cleanest quality, meeting your daily work and relaxation needs.
- **Sync-to-Sound** - Bounce to the beat of your favorite tunes. Coordinate the vibrant colors to your songs and fill your life with energy.
- **Made for Everyday Wear and Tear** - The strip's durable PU coating prevents moisture and dust intrusion and electrical leaks.
- **No Hub Required** - Connect to your home's secure Wi-Fi network. No need for a hub or extra equipment.
- **Flexible Installation*** - Cut it to whatever length you want and attach it to any surface with the 3M adhesive.
*Once cut, it cannot be reattached. Prevent accidental shocks by removing its power and then cutting along the strip's indicator lines.
- **Preset for Convenience** - Save and preset your favorite lightings for multiple scenarios.
- **Schedule & Timer** - Create schedules and count plans to turn on/off with the brightness/color you set.
- **Away Mode** - Simulate someone being at home to frighten away unwanted visitors.
- **Voice Control** - Use simple voice commands to control your light strip with Alexa or Google Assistant.

Appearance

The Tapo Smart Light Strip includes a power adapter, a control button, a controller, and the Light Strip.

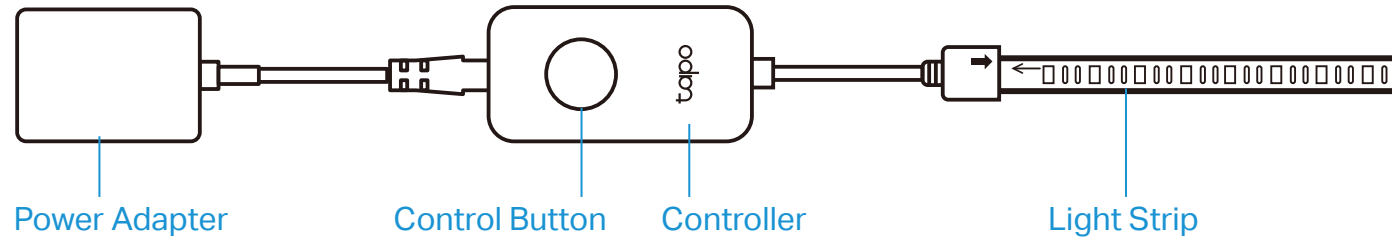

Control Button Explanation

Button Function	Description
Switch Preset Lighting Effects	Press the button two or three times to switch the preset lighting effects forward or backward.
Soft Reset (Only reset Wi-Fi info)	Press and hold the button for 5s but no more than 10s and release. The light strip will blink orange and green.
Factory Reset (Reset to factory settings)	Press and hold the button for at least 10s until the light strip turns solid white then blinks orange and green.

LED Light Status

LED Status	Description
Blinks orange and green	Ready for setup
Blinks green and white	Connecting to Wi-Fi
Blinks among several colors, then remains solid white	Connected to Wi-Fi and TP-Link server

Set Up Your Light Strip

Follow the steps below to get started with your new light strip.

Step 1. Download Tapo App

Get the [Tapo](#) app from the App Store or Google Play, or by scanning the QR code below.




OR




Step 2. Log In

Open the app, and log in with your TP-Link ID. If you don't have an account, create one first.

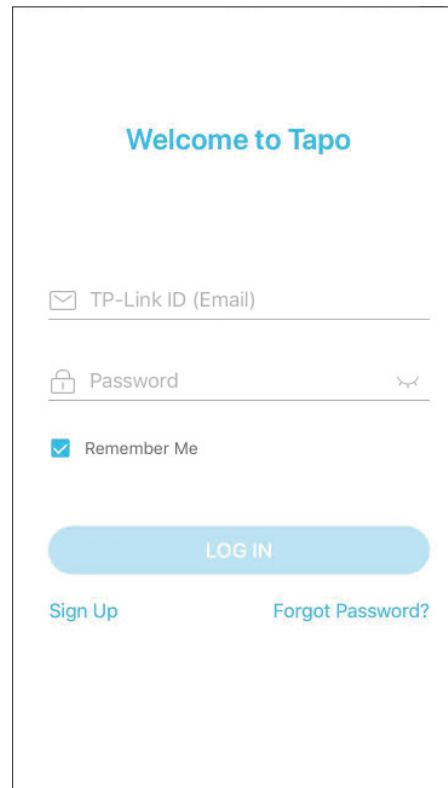

Step 3. Add Your Light Strip


Tap the \oplus button in the app, tap [Light Strips](#), and select your model.

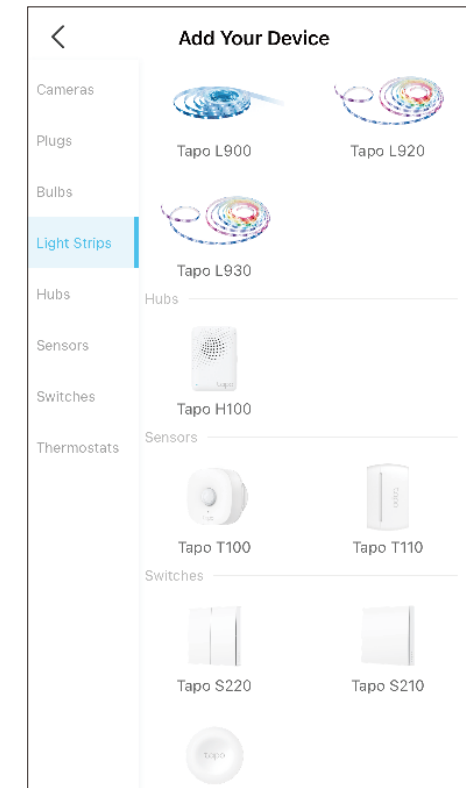

Step 4. Connect All Parts

Connect the Power Adapter, Controller, and the Light Strip before powering it up.


■ Note: Make sure the arrows on the light strip and the controller point at each other. Otherwise, it will not be powered on.

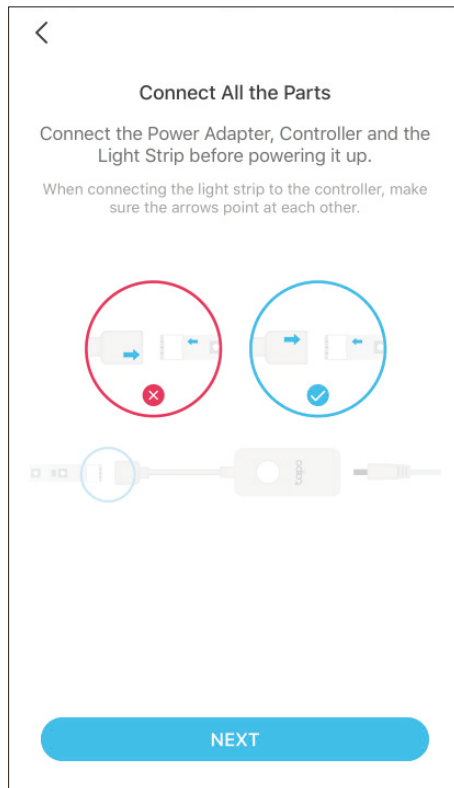

Step 5. Power Up Light Strip


Plug in the power adapter and check the lights.

■ Note: Do not roll up when using. Spread out the light strip before connecting the power supply.

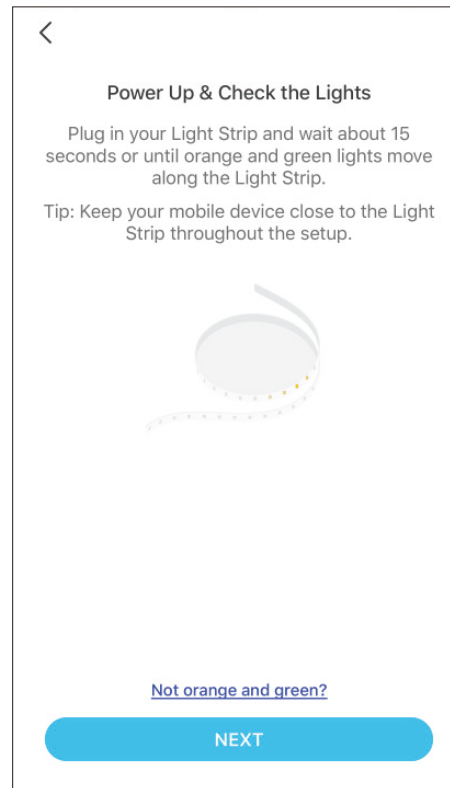

Step 6. Join Your Home Wi-Fi

Follow app instructions to add your light strip to your home network.

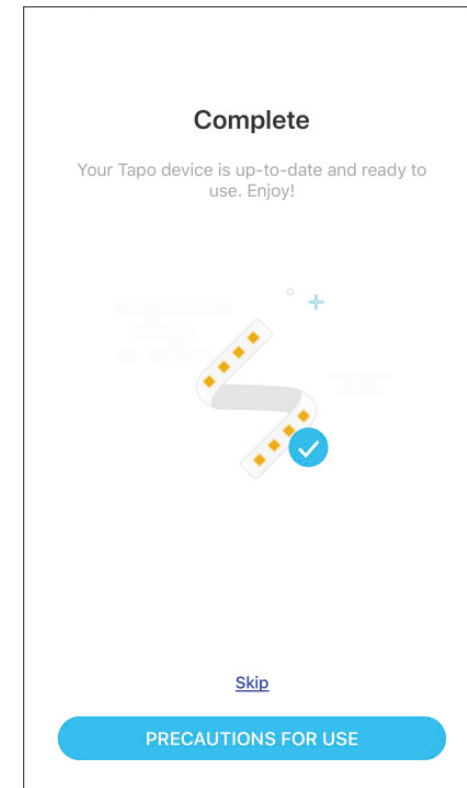

Add Your Light Strip to Home



This is a HomeKit-enabled device. You can also add it to the Home app for easy control from your iPhone or iPad. Follow the steps below to add your smart light strip via the [Home](#) app.

Before you start:

1. Your iPhone or iPad should be connected to a stable 2.4 GHz Wi-Fi network.
2. To control this HomeKit-enabled accessory, the latest version of iOS or iPadOS is recommended.
3. HomeKit will be disabled after 10 minutes since the light strip is powered on. You can power off your light strip and power it back on, then try again.

Add to Home


1. Open the Home app. Or if you have added the light strip to Tapo, you can also tap [Add to Home](#) in the [Device Settings](#) page.

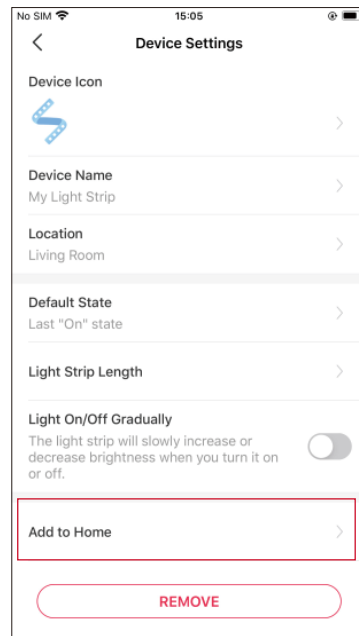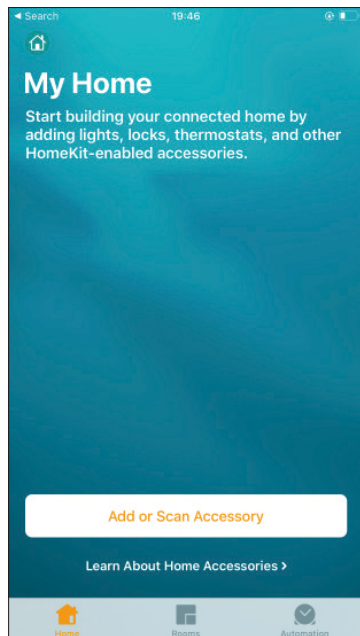


2. Scan the HomeKit QR code on the bottom of the light strip controller box. It will be added to Home automatically.

Failed to add to Home?

1. Press and hold the control button for 10 seconds to factory reset the light strip.

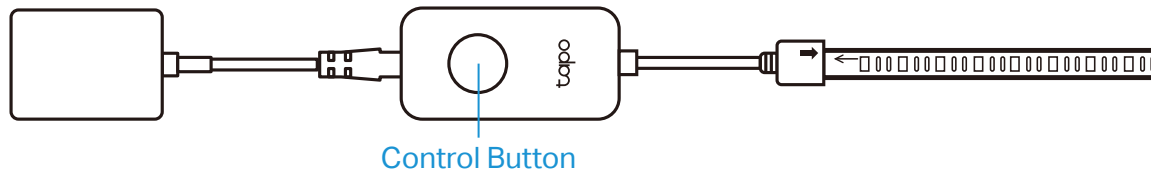

2. Move both your iPhone/iPad and the light strip closer to the router to get a stronger Wi-Fi signal.
3. Turn off the Wi-Fi on your iPhone/iPad for a few seconds, then turn it back on to clear the cache of the Home app.
4. Make sure your iPhone/iPad is connected to the 2.4 GHz Wi-Fi network. Set different names for 2.4 GHz and 5 GHz networks, or temporarily turn off the router's 5 GHz Wi-Fi until your smart device is successfully added.
5. Change the router's 2.4 GHz Wi-Fi channel to a fixed one, such as 1, 6, and 11. Then reboot your router.
6. If you still cannot add the light strip to Home, tap [set it up with Tapo manually](#). Then follow the app instructions to add your light strip.

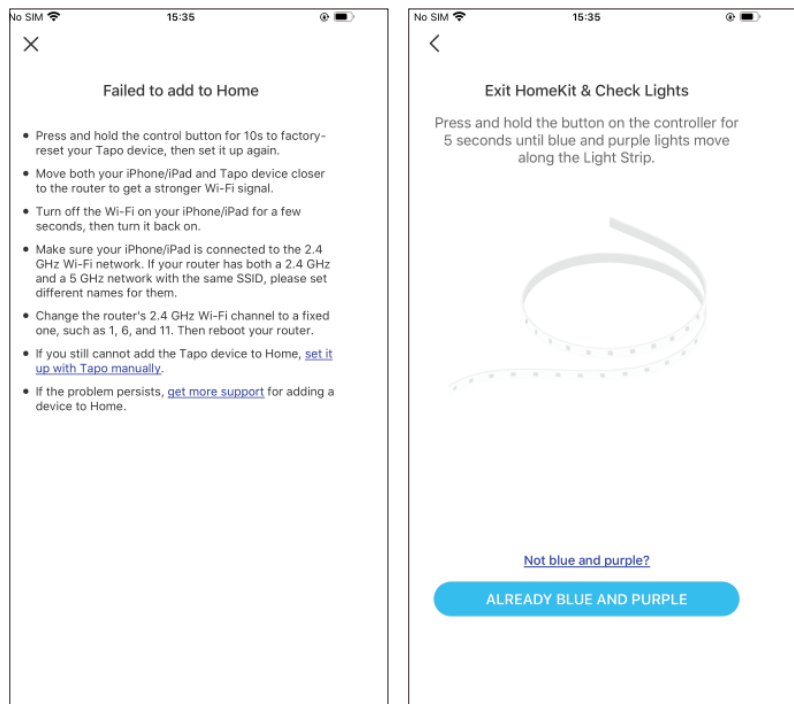


7. If the problem persists, refer to the FAQ for detailed instructions: <https://www.tp-link.com/support/faq/3390/>



Step 1. Choose Location


Choose a location that avoids static and eases away from splashing water. Find a clean, dry and smooth surface, then wipe off the dust.

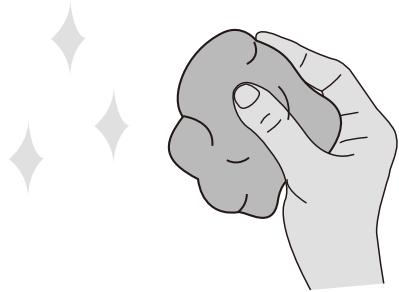

Step 2. Remove Adhesive Tape

Unplug the light strip first. Slowly peel away the 3M adhesive backing and take it out bit by bit.


■Note: Do not peel off the tape under the adhesive backing.

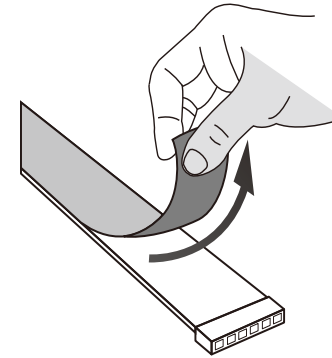

INSTALL LIGHT STRIP


Step 3. Stick Light Strip

Stick the light strip and press it down for 10-15 seconds. Secure the controller with the adhesive pads. Do not move it to other place after it is attached.

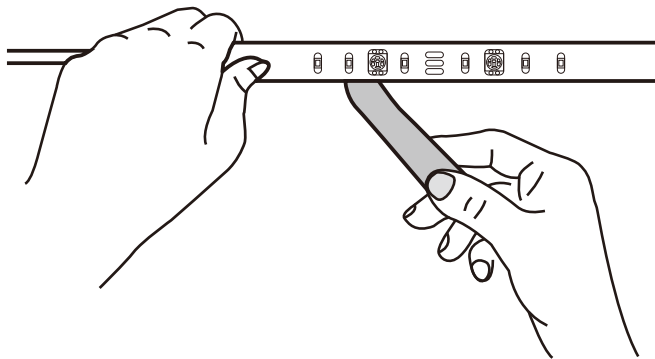

Step 4. Power Up Light Strip

Plug in the power adapter to power on your light strip.

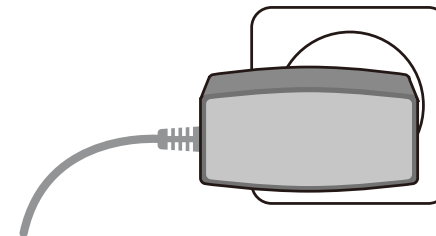


Basic Device Control

After successfully setting up your light strip, you will see the home page of the Tapo app. Here you can view the status of all devices that you've added and manage them. You can tap on the device to control and manage.

Home Page

You can turn on or off the light strip anytime anywhere and tap the card to enter the status page.

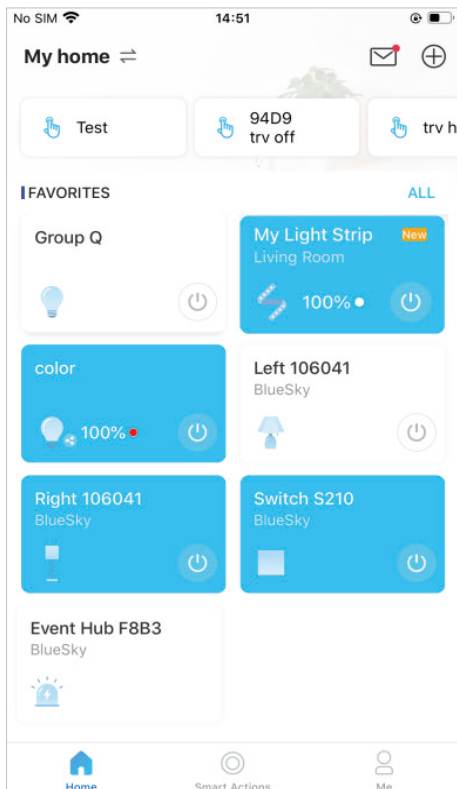


Device Status Page

You can adjust brightness and colors, start sync-to-sound, set lighting effects, create schedules, enable away mode, or set a timer to automatically control your device, view its runtime & energy usage, and more.



Device Settings Page

You can edit the basic information, set default state, change the illuminated length, enable gentle on/off, update firmware, and more.

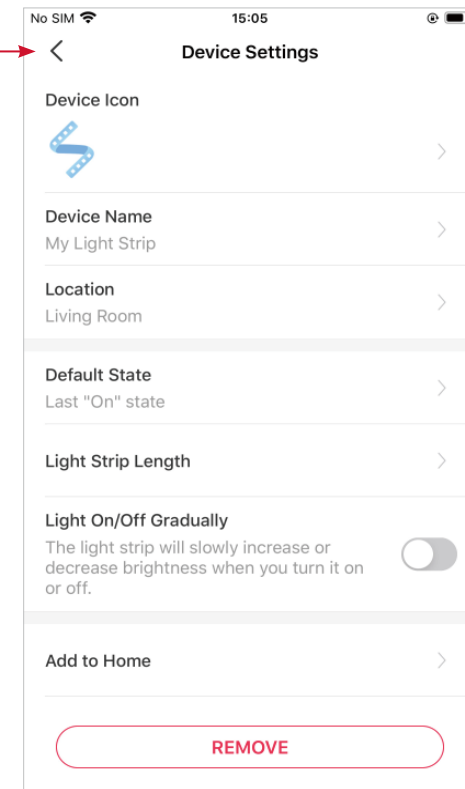


Configure Your Light Strip

You can configure your light strip by adjusting lighting settings and setting Presets, Schedule, Timer, Away Mode and more.


Power On/Off At One Tap

Quickly power on or off your light strip with a tap.

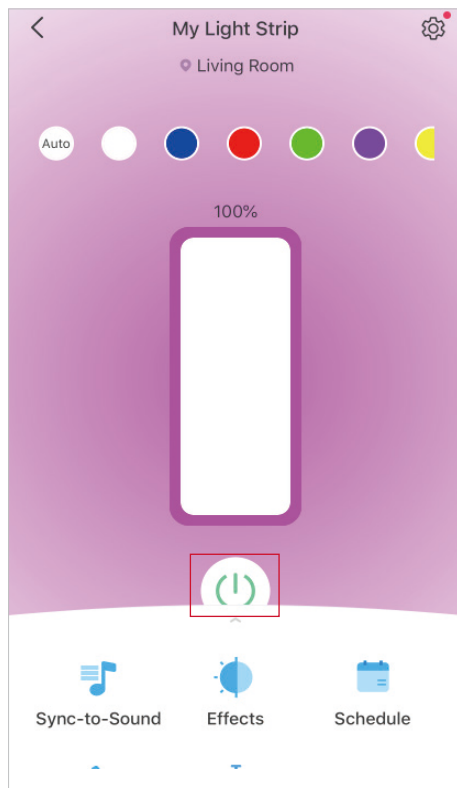


Adjust Brightness

Slide to dim your light strip with a range from 1% to 100%.

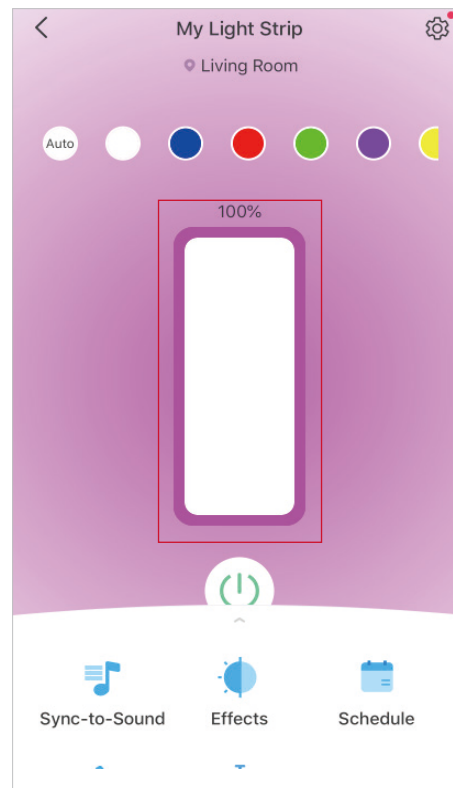


Auto White

Tap **Auto** to select a lighting option for different use.

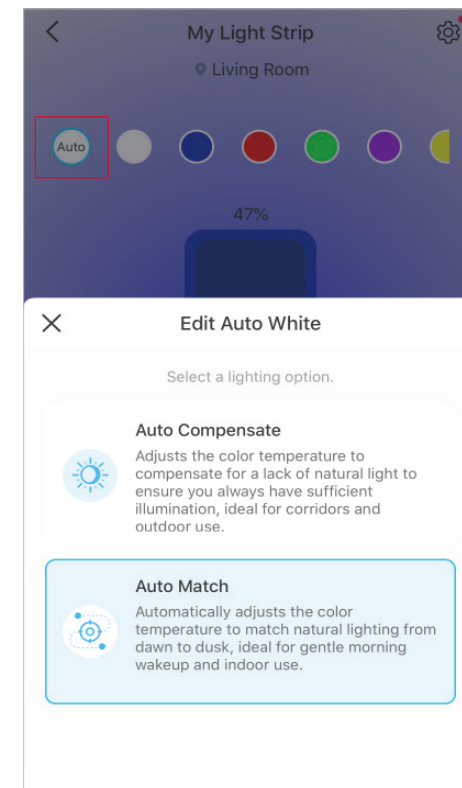

Change Color & Lighting Effect



Tap to apply the color or lighting effect.

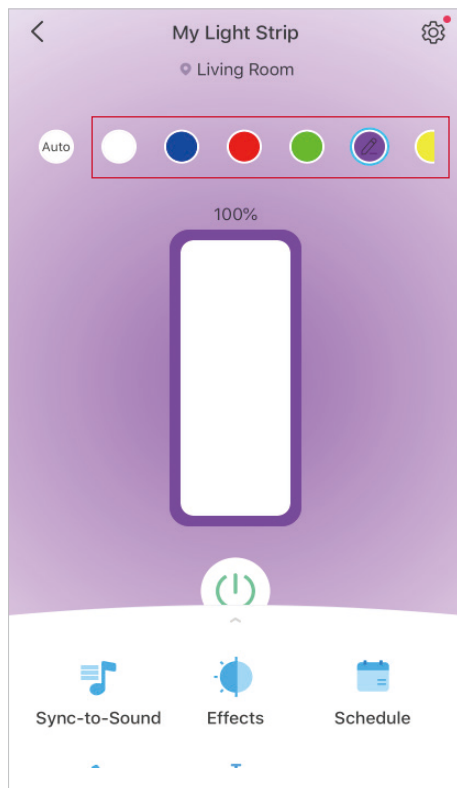

Presets

Tap on a preset to quickly apply your favorite colors or lighting effects.

To edit Presets, tap on a preset and the edit icon  will appear, then tap the edit icon .


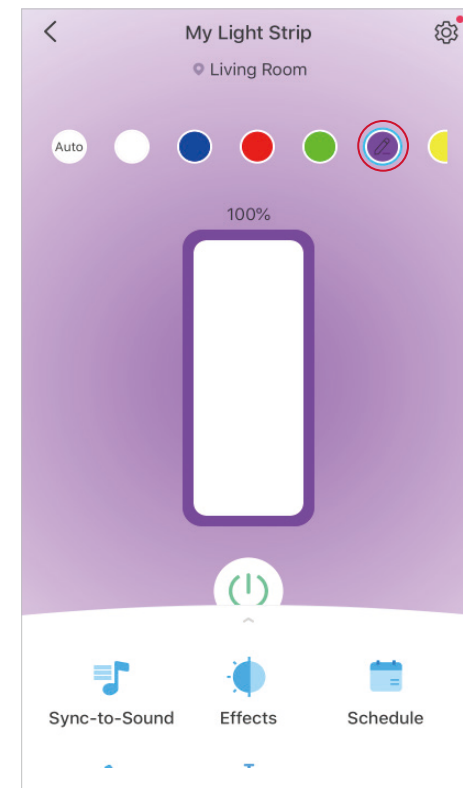
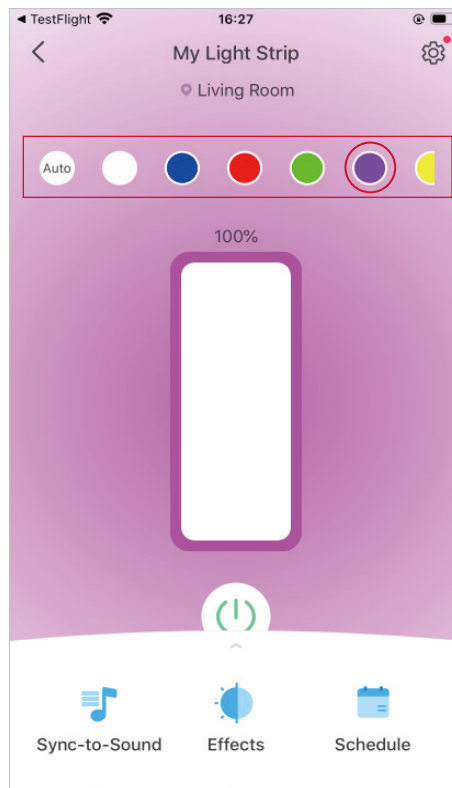


Presets Settings


White Light: Change color temperature and brightness for the preset.


Color Light: Change the color and brightness for the preset.

Effects: Select or create a new lighting effect for the preset.

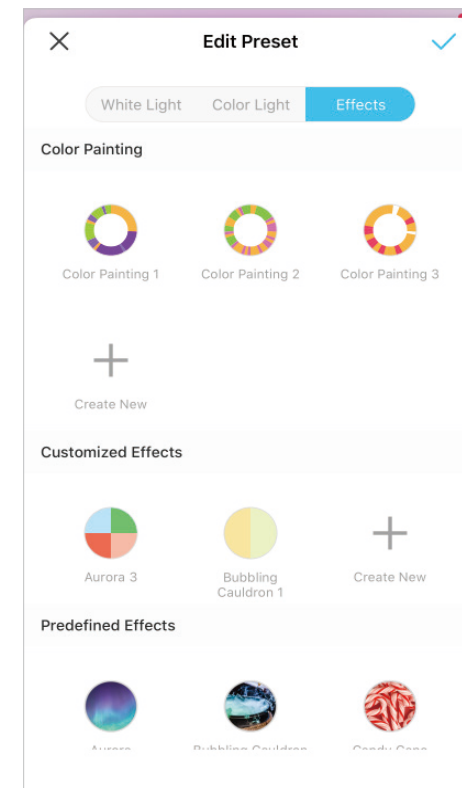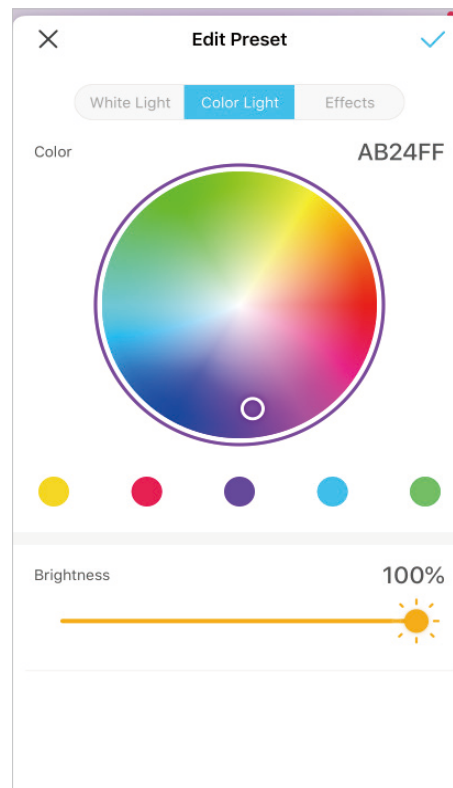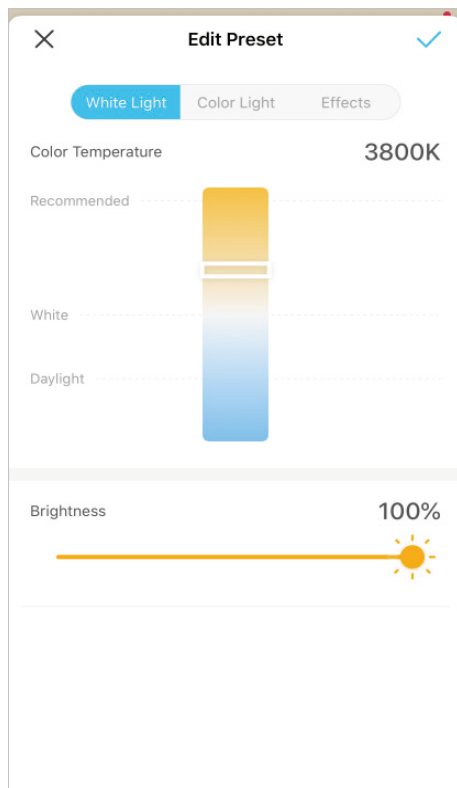


Sync to Sound


Tap  to start sync-to-sound to coordinate your favorite music with your Tapo lights.

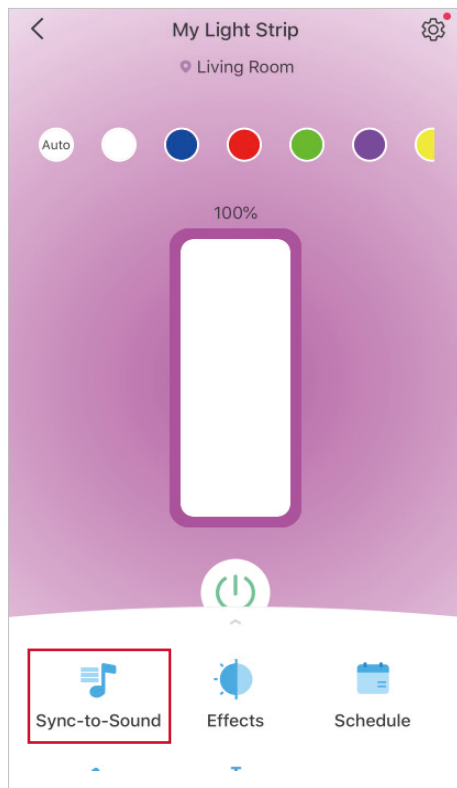


Keep sync-to-sound page in the foreground to ensure audio reception.

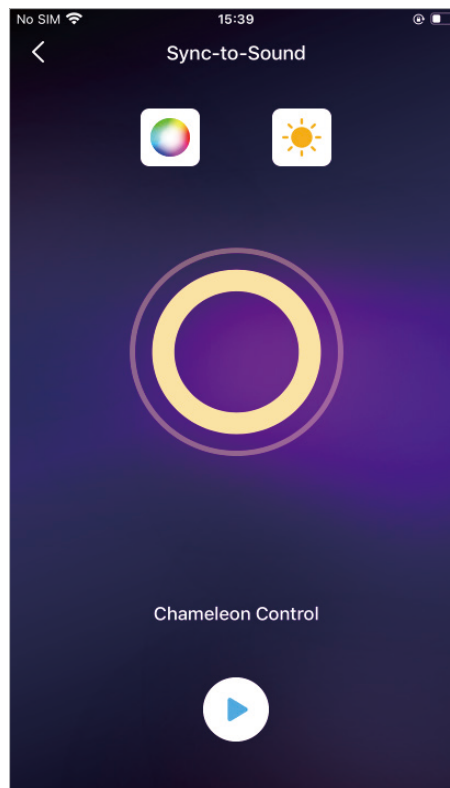


Adjust the displayed color and brightness according to the music.

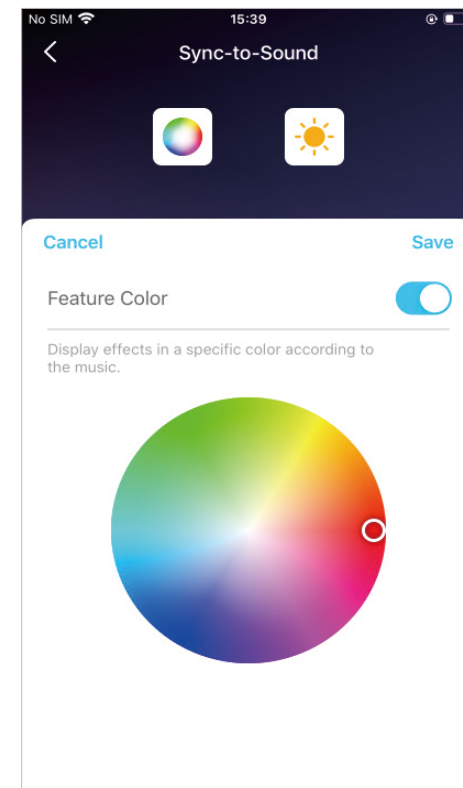


Set Lighting Effects

Tap  to create wonderful lighting effects to meet your needs.

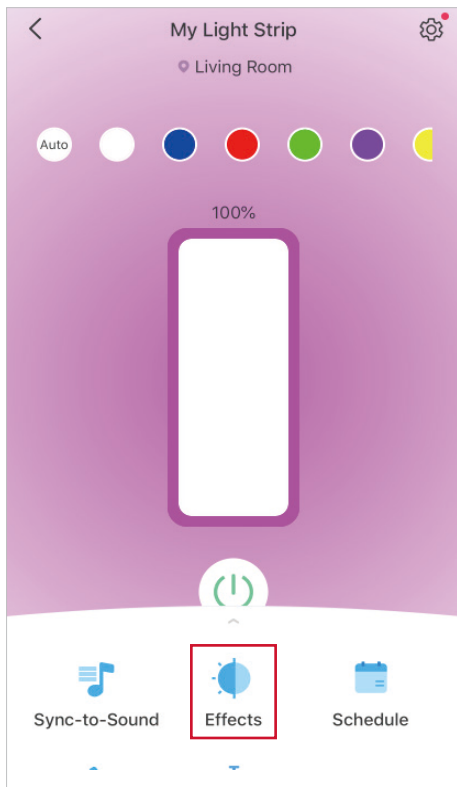


Option 1: Choose a Solid Color

Multiple colors are provided and you can select a color you prefer.

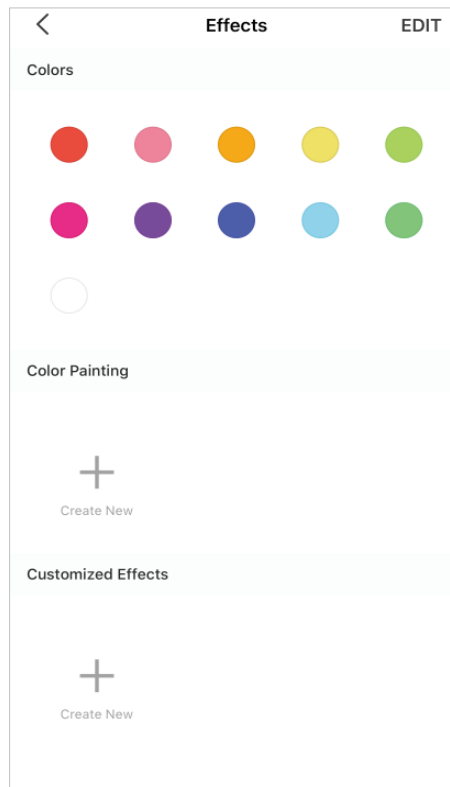


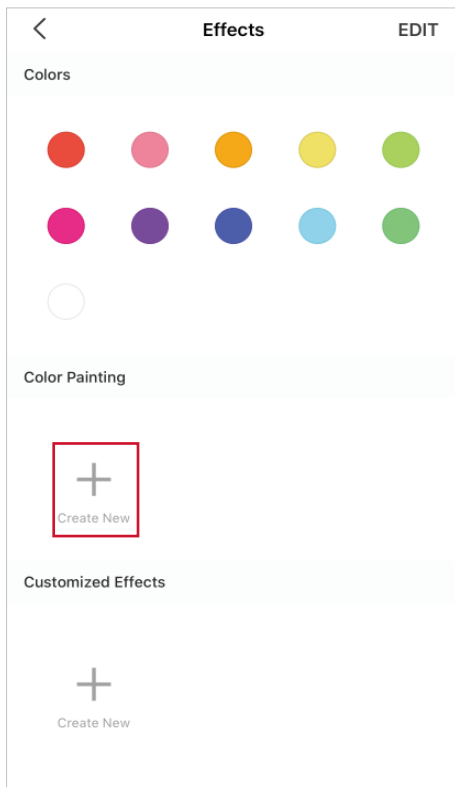
Option 2: Choose a Predefined Effect

There are all kinds of predefined effects to fit different scenarios. Select the one you prefer.

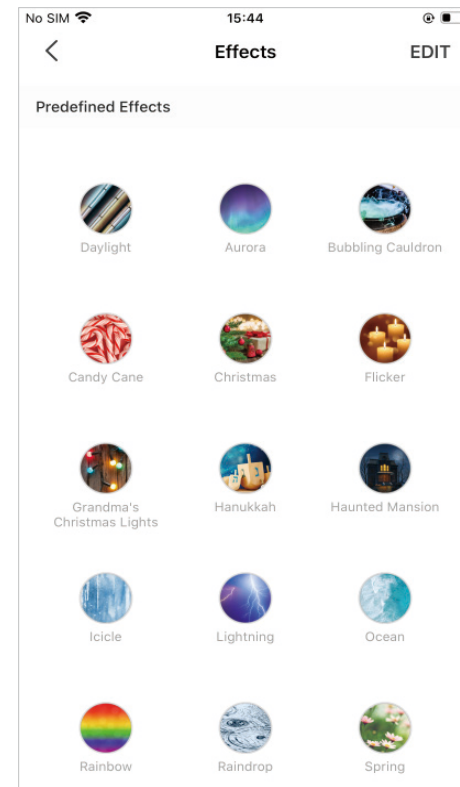


Option 3: Create a Color Painting


1. Tap  to create a new color painting.




2. Choose a color you prefer.

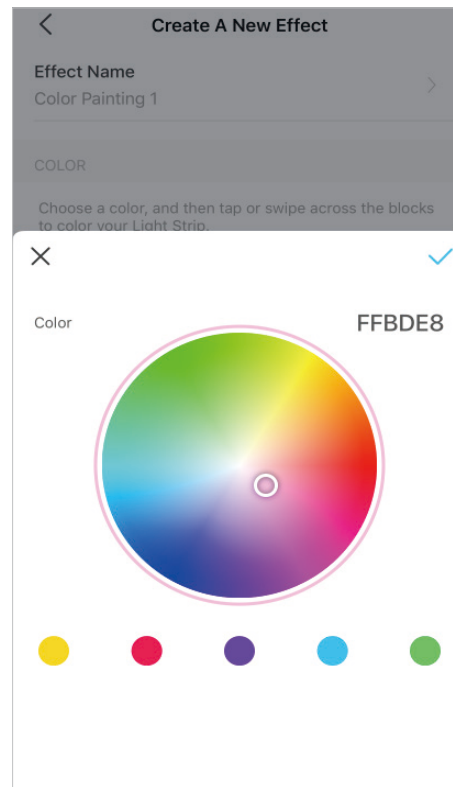


3. Tap or swipe across the blocks to color your light strip and set the brightness as needed. Tap **SAVE** to save the color painting.

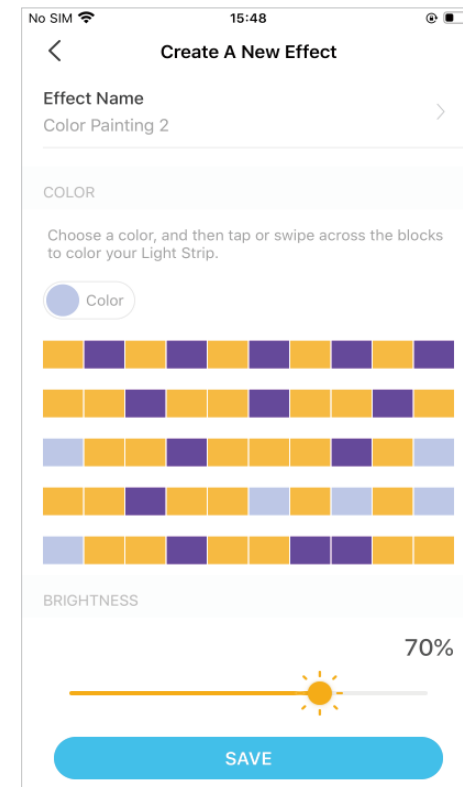


Option 4: Create a Lighting Effect


1. Tap  to create a new effect.

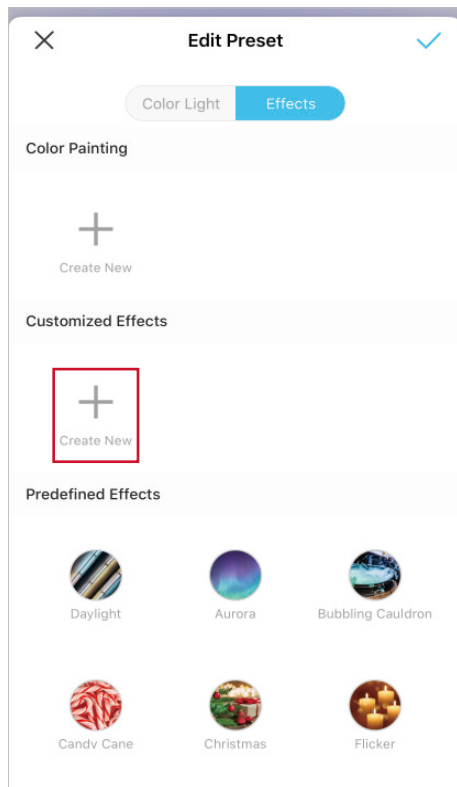


2. Edit the name as needed, then select an effect and choose colors you prefer. If you have no idea, tap **Random Color** and Tapo will help select colors for you.

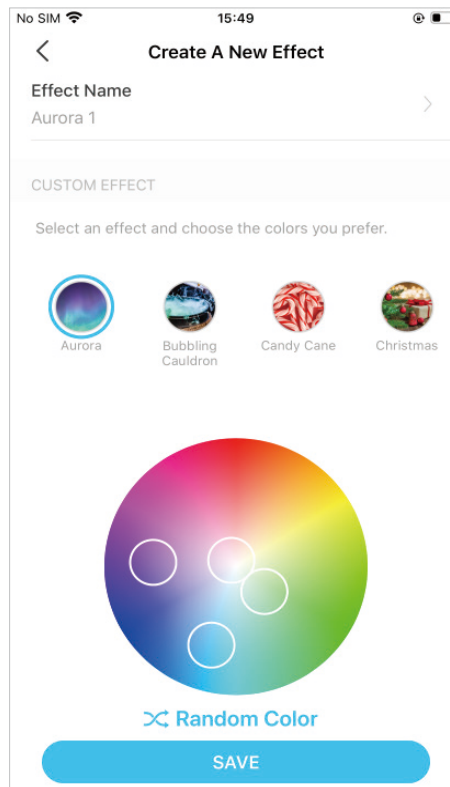


3. Adjust how fast you want the color to switch and set the brightness as needed. Tap **SAVE** to save the custom effect.

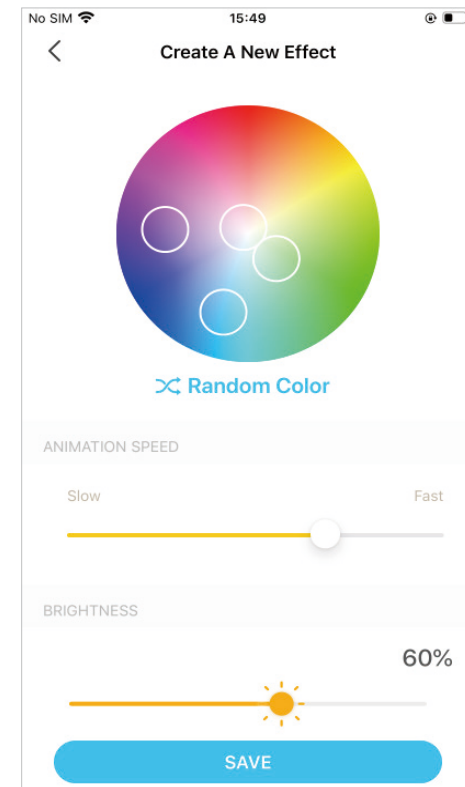

Set Schedule

Tap  to add a schedule for your light strip to automatically turn on/off and adjust the lighting settings to simplify your daily routine.

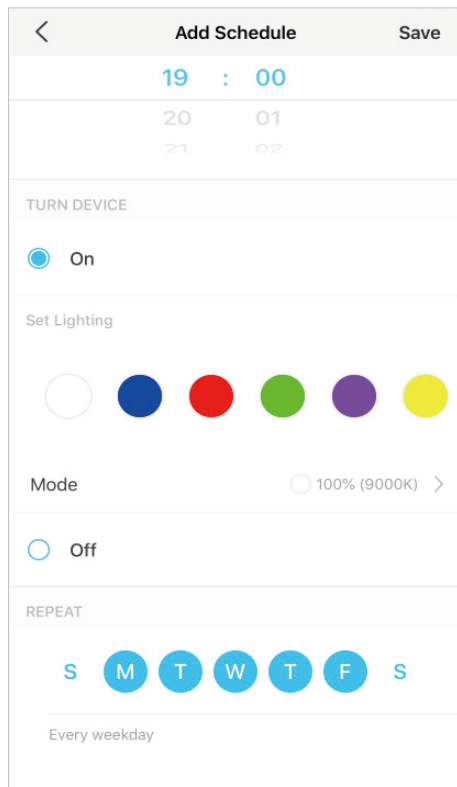

Add Schedule Save

19 : 00

20 01

21 02

TURN DEVICE

On

Set Lighting

Mode 100% (9000K) >


Off


REPEAT

S M T W T F S

Every weekday

Set Away Mode

Tap  to preset the Away Mode, set the start and end time, then your light strip will be randomly turned on/off during this period.

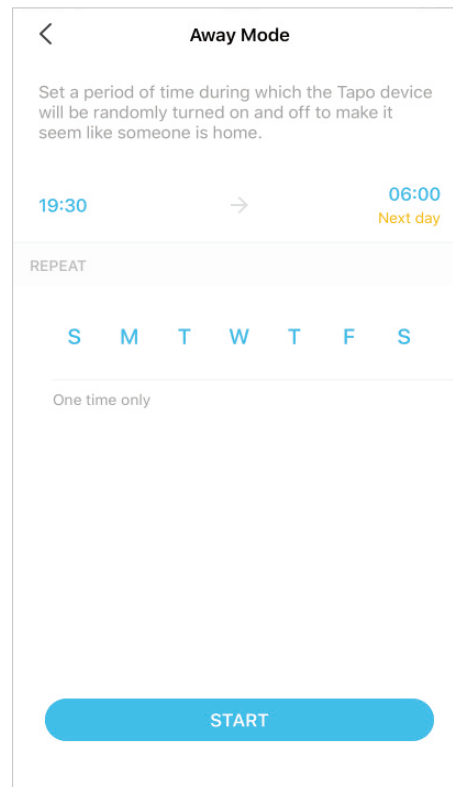

Away Mode

Set a period of time during which the Tapo device will be randomly turned on and off to make it seem like someone is home.

19:30 → 06:00
Next day


REPEAT


S M T W T F S

One time only

START

Set Timer

Tap  to set the timer and lighting settings, then your light strip will automatically turn on with the specific settings after the timer ends.

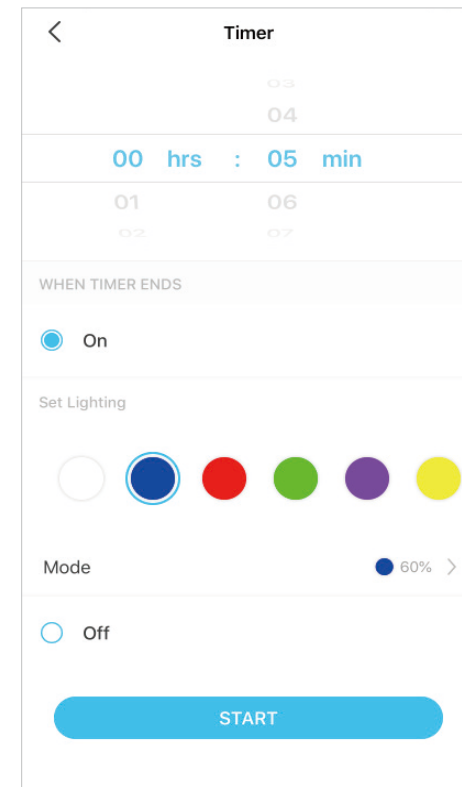

Timer

00 hrs : 05 min

01 06

02 07

WHEN TIMER ENDS

On

Set Lighting


Mode 60% >

Off

START

Check Runtime & Energy Usage


Slide up to check your light strip's Runtime and Energy Usage today, past 7 days or past 30 days.

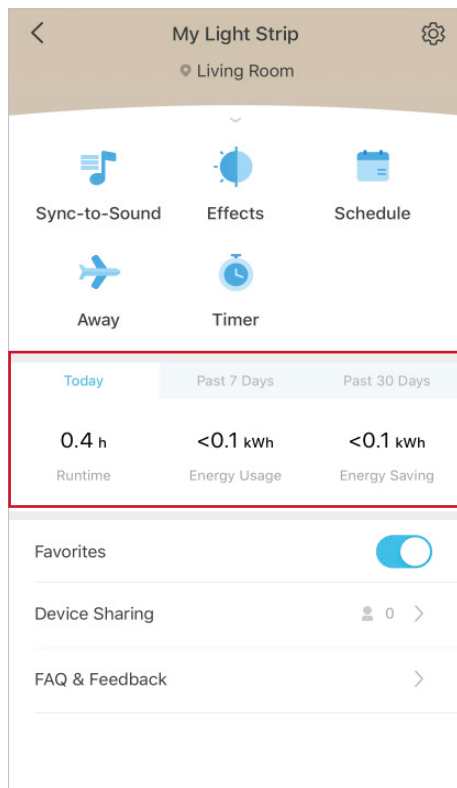


Share Your Light Strip

You can invite your family members to manage your Tapo devices together by entering the TP-Link ID (email) you want to share the devices with.

Method 1: Go to [Device Status](#) page, slide up and tap [Device Sharing](#).

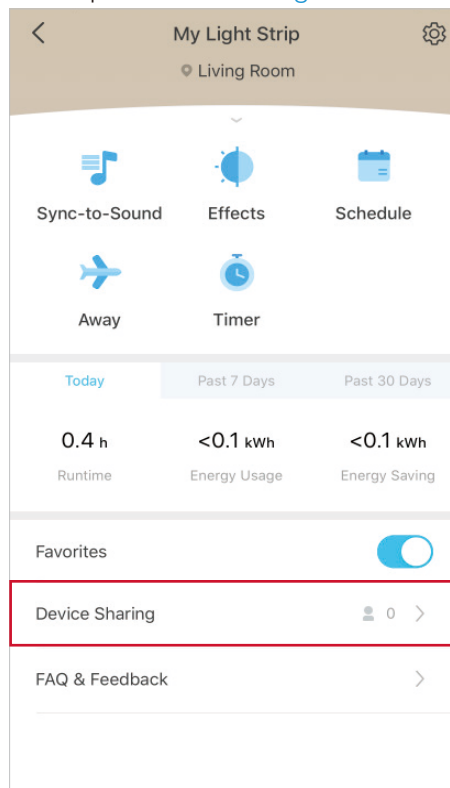


Method 2: Go to [Me](#) page and tap [Device Sharing](#).

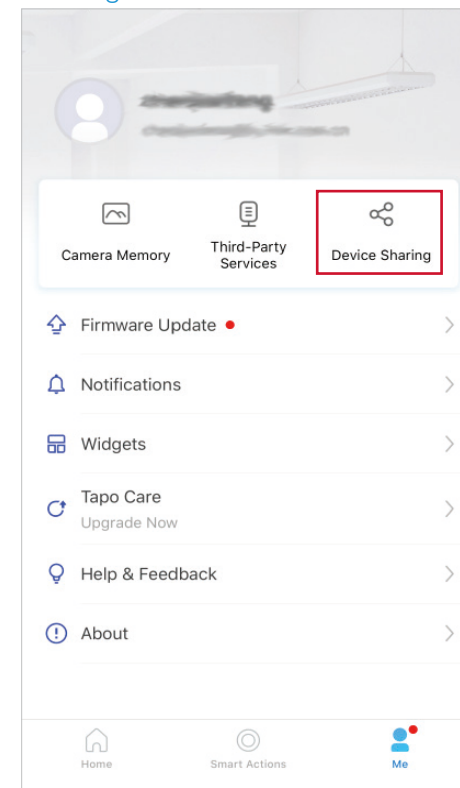


Device Default State

Set the state (color/brightness/effect) of your light strip, and then each time you turn on the light strip, your light strip will go to this set state.

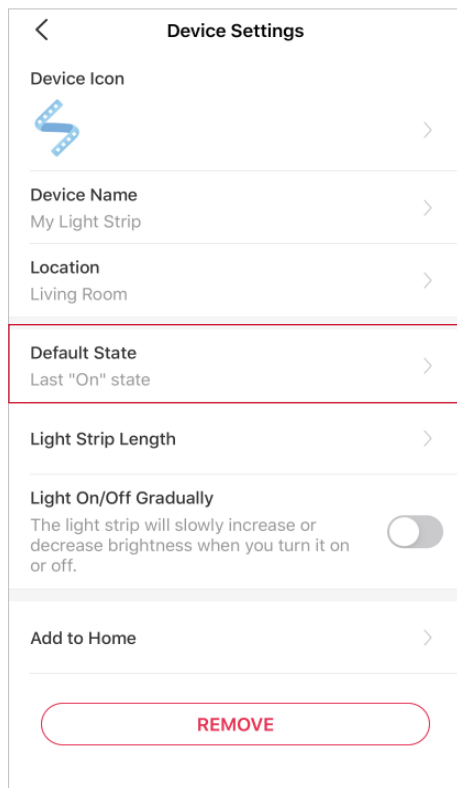


Option 1: Last "On" State

When you turn off the light strip, the light strip will remember the state (color/brightness/effect) before it was turned off. Therefore, if you select **Last "On" state**, the light strip will go to the remembered state each time it's turned on.

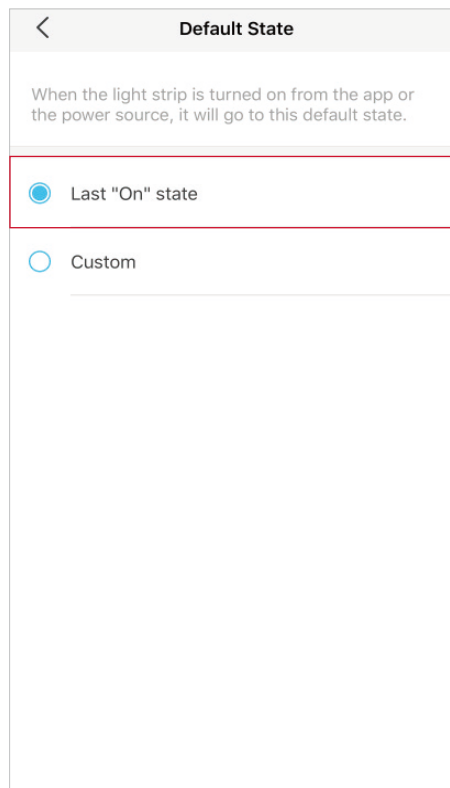

Option 2: Custom



Set a preferred state (color/brightness/effects), and then your light strip will go to your preferred state each time it's turned on.

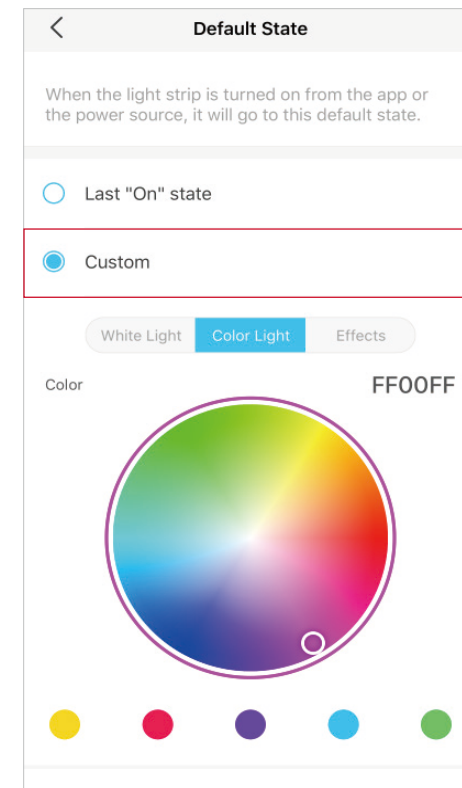

Light Strip Length


Changing the default length of your light strip will change how much of the strip illuminates. It takes effect after you switch the lighting effect.

Note: For Tapo L930-10, illuminated lengths of two strips synchronize according to the length set. If you prepare to cut the strips, it is recommended to cut them into equal lengths to ensure the lighting effect.

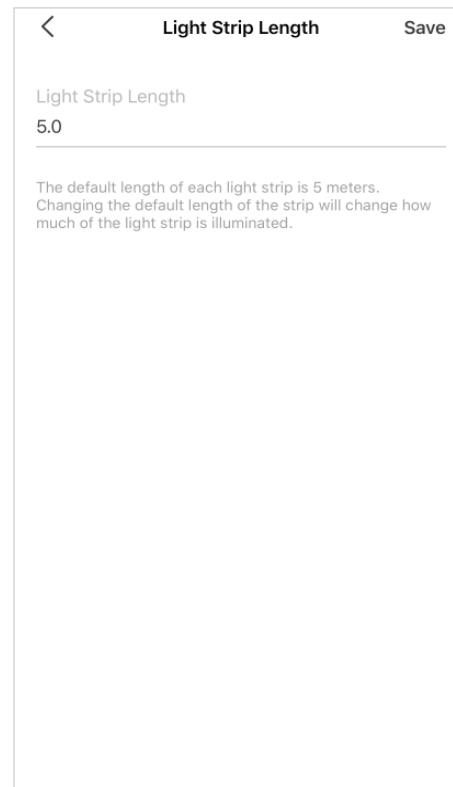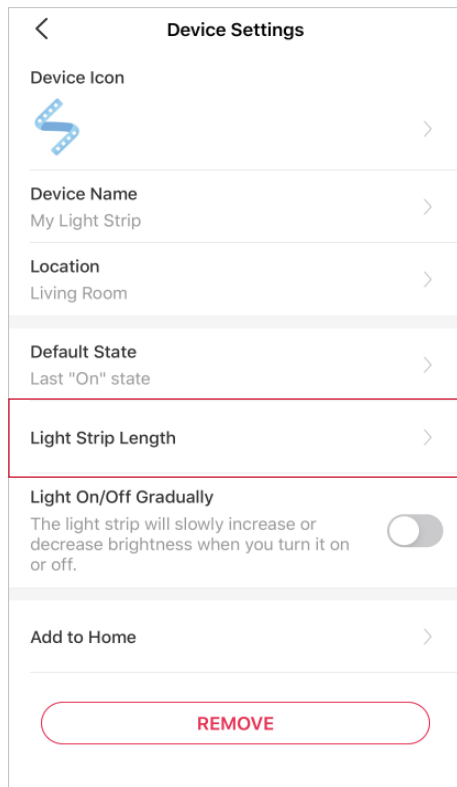

Light On/Off Gradually

Enable **Light On/Off Gradually** and your light strip will slowly increase or decrease brightness when you turn it on or off.

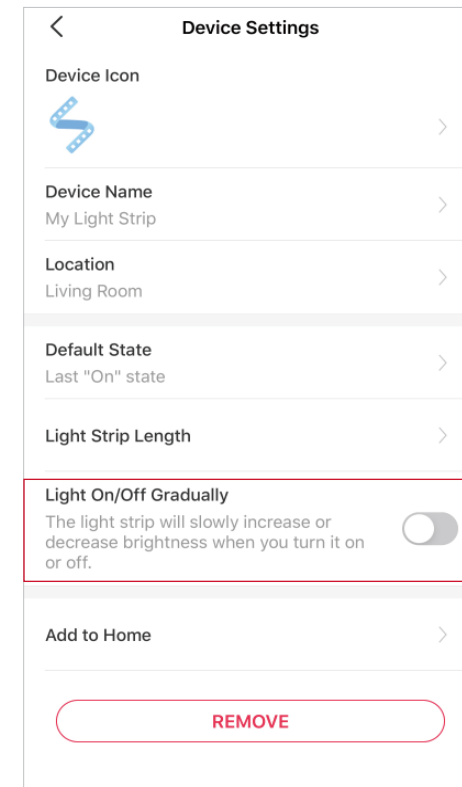




Smart Actions

Smart Actions automate repetitive tasks, allowing you to blaze through tedium with utmost ease. Set everything up once and never have to worry about it again. With Smart Actions, giving your home that level of intelligence is a snap. Shortcut lets you perform an action with a simple tap. Automation allows you to automate tasks to be performed at a set time. e.g. The light will light on at sunset.

Option 1: Edit based on the featured actions


1. Go to the [Smart Actions](#) page and you will see the [Featured Actions](#) (Shortcut or Automation).

2. Tap on a featured action. Tap [EDIT](#) to change the settings as needed and tap [APPLY](#) to save changes.

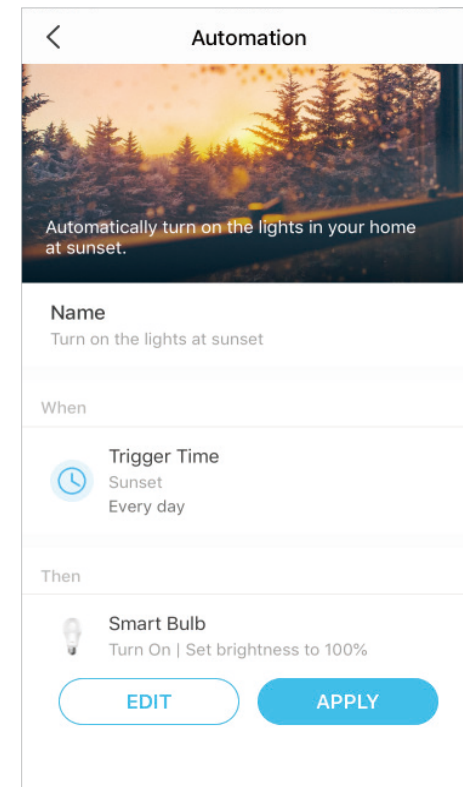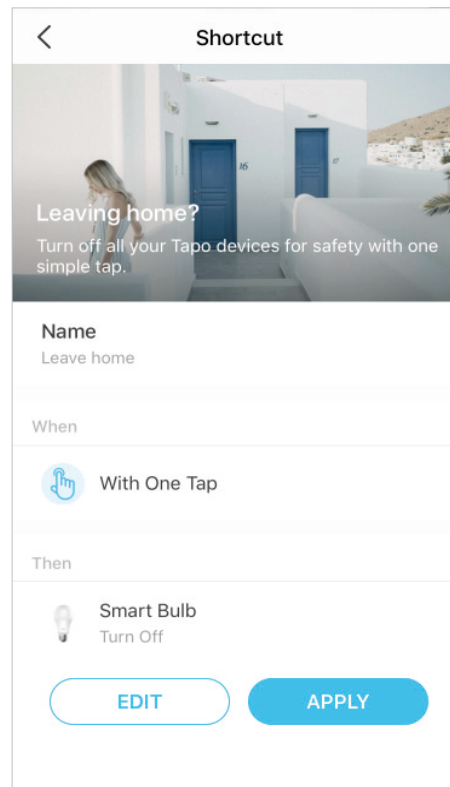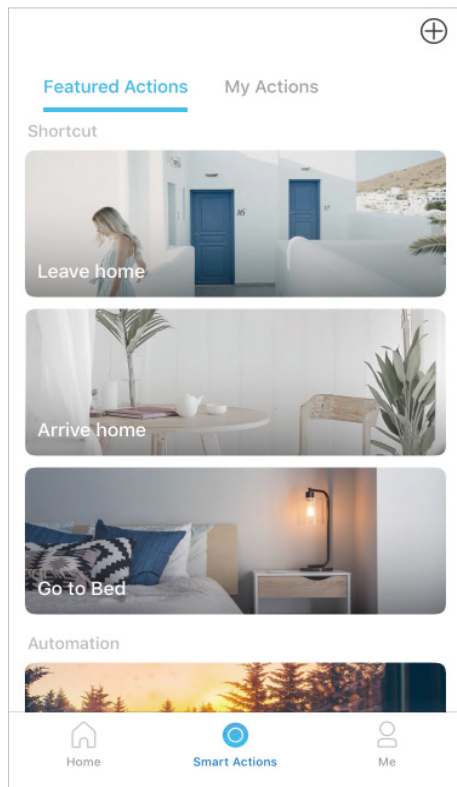


Option 2: Create your own actions


1. Go to [My Actions](#) page. Tap + on the top right to add a simple and smart action.

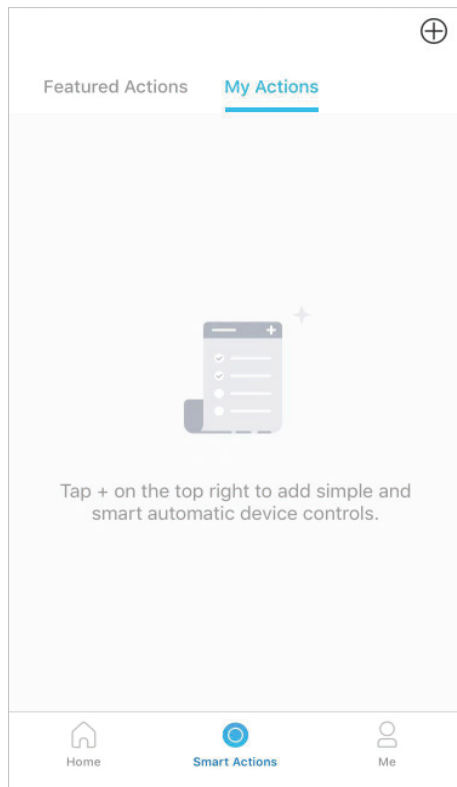


2. Name the new action. Tap + to add conditions ([When](#)) like the trigger time, and tap + to add tasks ([Then](#)) like turning on your light strip with specific effects.

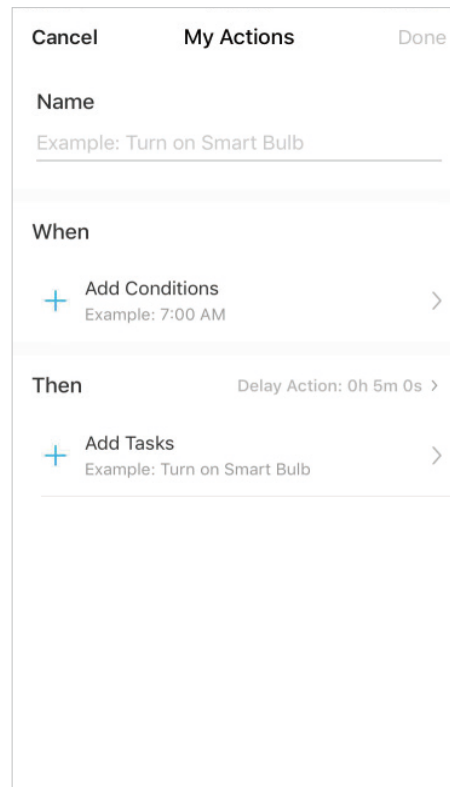

3. When the action created, you can also delay the action for a specific time. Tap **Done** to save all the settings.

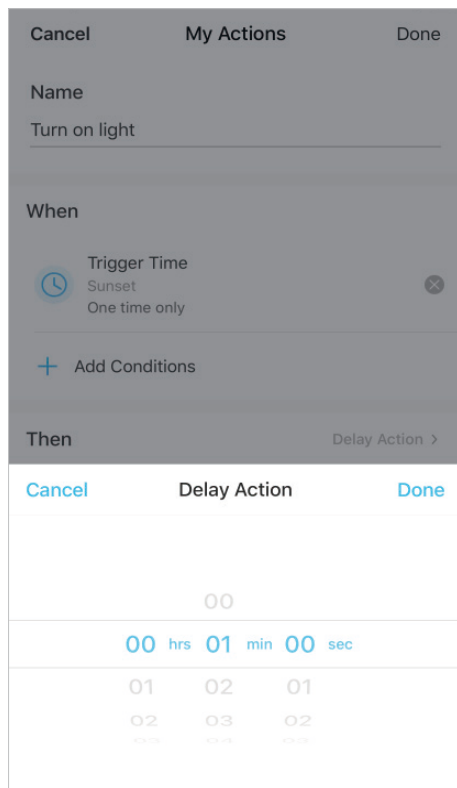

If there are more than 2 conditions added, you can decide when to perform the action. Tap **When Any Condition is Met**, and select "Any Condition is Met" or "All Conditions Are Met".




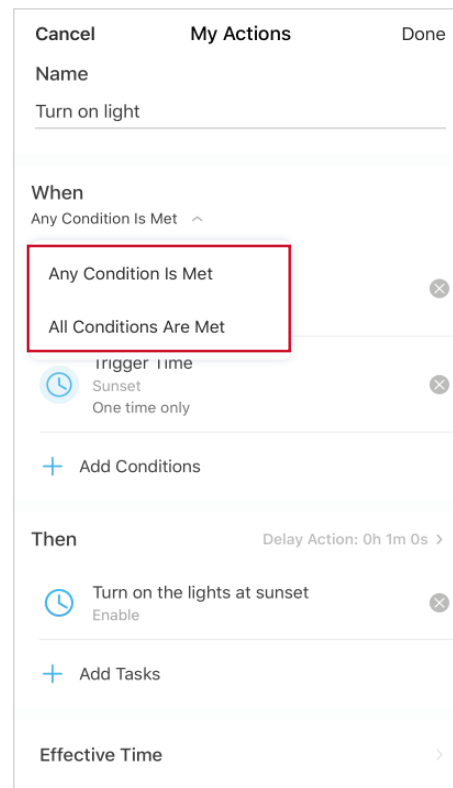


Third-Party Services



Control your smart devices through third-party services, including voice control. Free up your hands with simple voice commands to control your devices via Amazon Alexa or Google Assistant.

Go to [Me](#) page and tap [Third-Party Services](#).



Select [Amazon Alexa](#) or [Google Assistant](#). Follow the app instructions to control your device via voice.

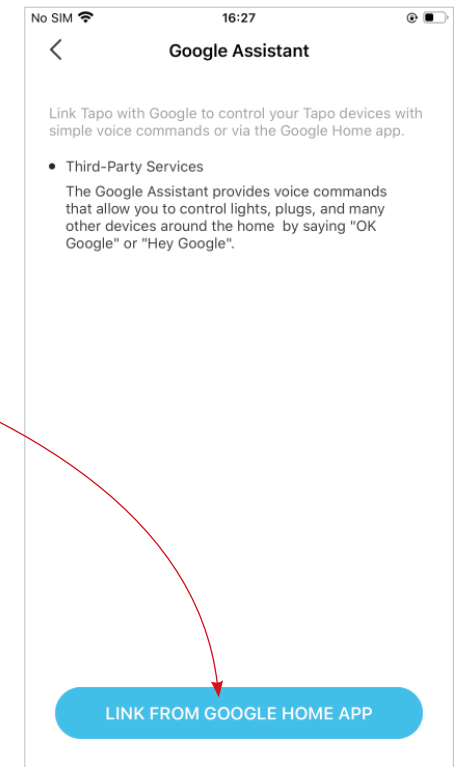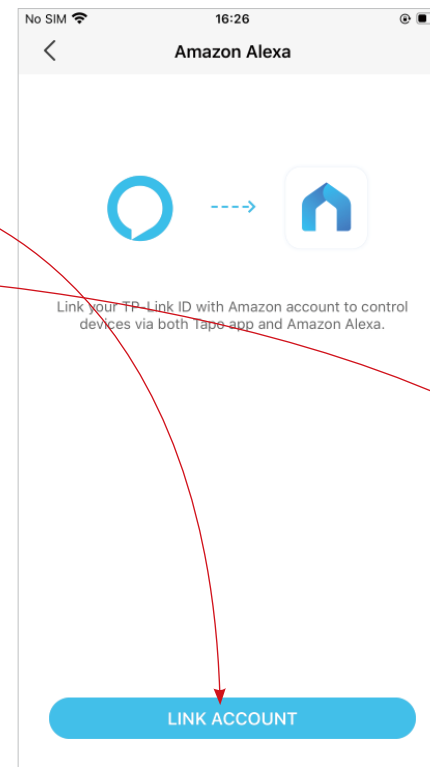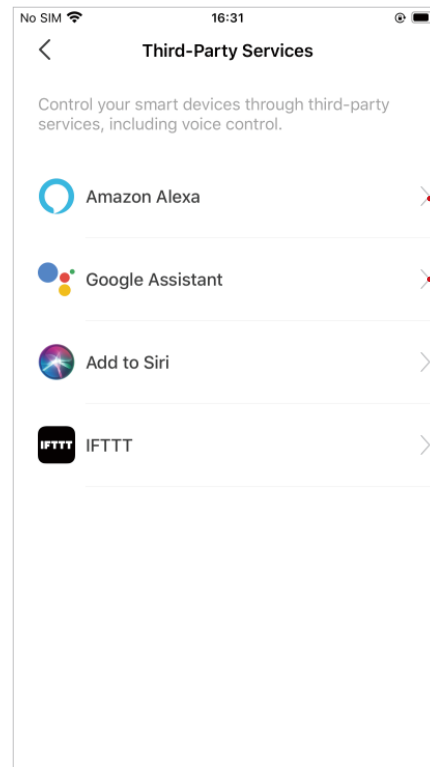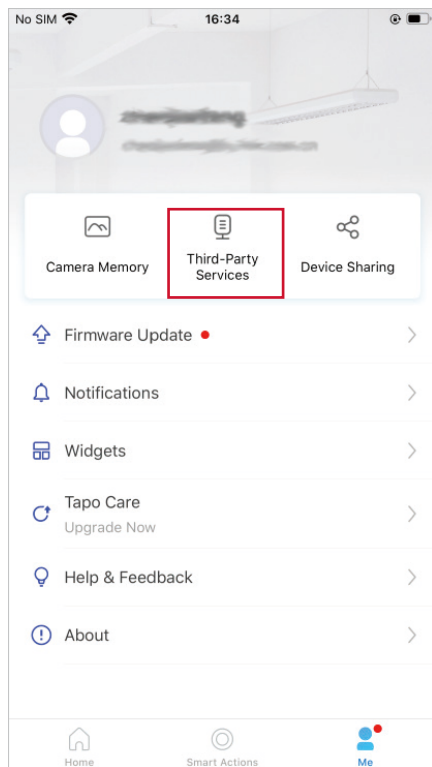

Select [Add to Siri](#). Follow the app instructions to create a new, custom shortcut using the Shortcuts app for iPhone or iPad.

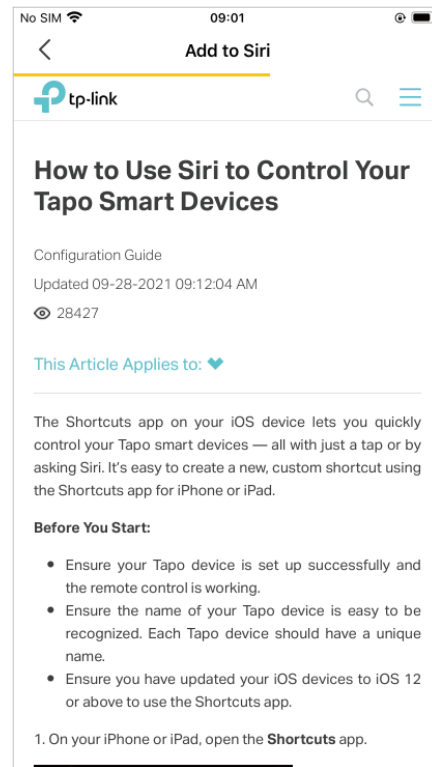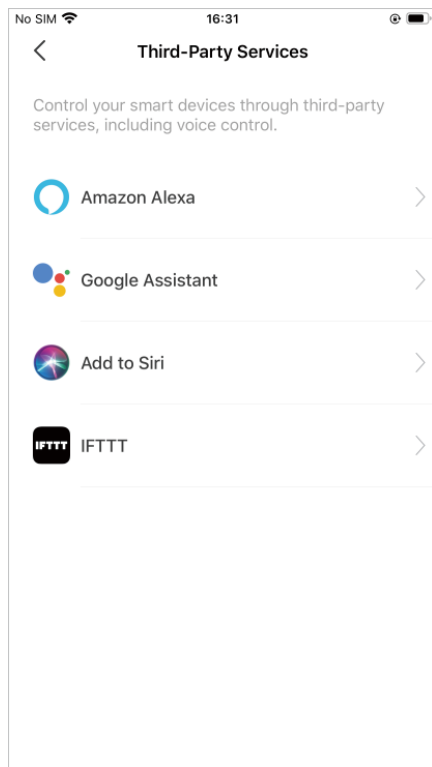

Select [IFTTT](#). Follow the app instructions to set up IFTTT.

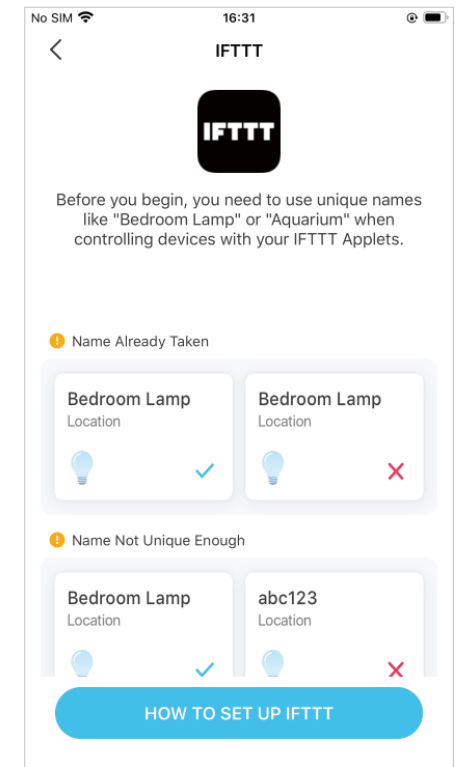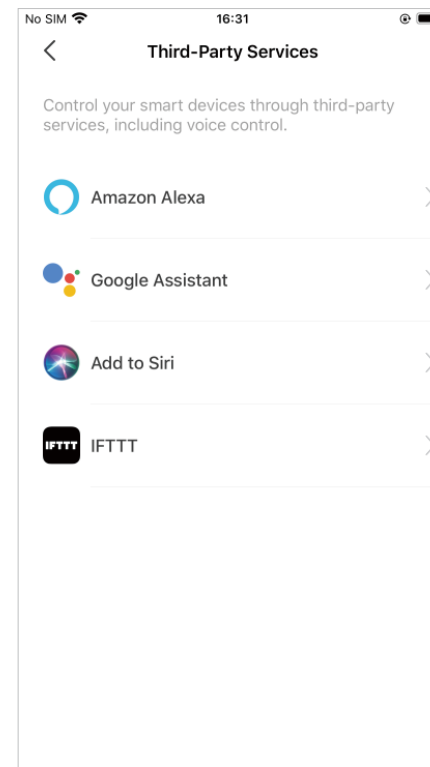

Reset Your Light Strip

There are two types of reset available: a [soft reset](#) which resets the Wi-Fi settings only, and a [factory reset](#) that erases all of your custom settings and restore them to factory defaults.

Soft Reset (without losing the configuration settings except Wi-Fi)

Press and hold the button on your controller for more than 5 seconds but no more than 10 seconds and release. The light strip animating orange and green after that indicates a successful soft reset. Then you can reconfigure your light strip in Tapo app.

Factory Reset (back to factory default settings)

Method 1



Press and hold the button on the controller for at least 10 seconds until the light strip turns solid white then blinks orange and green. Then you can reconfigure your light strip in Tapo app.

Method 2

On the home page in Tapo app, long press the card and tap .

OR

Go to [Device Settings](#) page and tap [REMOVE](#) at the bottom.

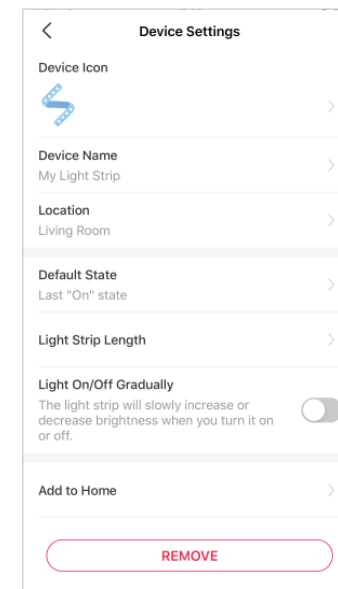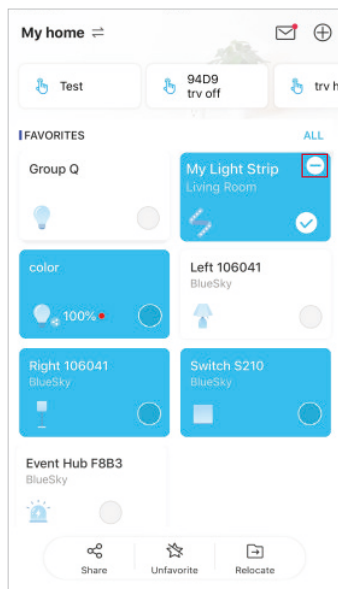

Authentication

FCC Compliance Information Statement



Product Name: Tapo Smart Light Strip, Multicolor

Model Number: Tapo L930-5 / Tapo L930-10

Component Name	Model	FCC ID
Tapo Smart Light Strip, Multicolor	Tapo L930-5 / Tapo L930-10	2AXJ4KL420
I.T.E. Power	T120100-2B1 / T120200-2B1	N/A

Responsible party:

TP-Link USA Corporation

Address: 10 Mauchly, Irvine, CA 92618

Website: <https://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6804

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

We, **TP-Link USA Corporation**, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2022-08-02

FCC Compliance Information Statement



Product Name: I.T.E. Power

Model Number: T120100-2B1 / T120200-2B1

Responsible party:

TP-Link USA Corporation

Address: 10 Mauchly, Irvine, CA 92618

Website: <https://www.tp-link.com/us/>

Tel: +1 626 333 0234

Fax: +1 909 527 6804

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We, **TP-Link USA Corporation**, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2022-08-02

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

OPERATING FREQUENCY(the maximum transmitted power)

2400 MHz -2483.5 MHz(20dBm)

EU declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU, and (EU)2015/863.

The original EU declaration of conformity may be found at <https://www.tapo.com/support/ce/>

RF Exposure Information

This device meets the EU requirements (2014/53/EU Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

Restricted to indoor use.



UK declaration of conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK declaration of conformity may be found at <https://www.tapo.com/support/ukca/>

Canadian Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

CAN ICES-005(B)/NMB-005(B)

Korea Warning Statements

당해 무선설비는 운용중 전파혼신 가능성이 있음.

NCC Notice

注意!

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

BSMI Notice

安全諮詢及注意事項

- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 不要私自拆開機殼或自行維修，如產品有故障請與原廠或代理商聯繫。

限用物質含有情況標示聲明書

設備名稱：Tapo Smart Light Strip, Multicolor			型號（型式）：Tapo L930-5 / Tapo L930-10			
Equipment name			Type designation (Type)			
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁺⁶)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
PCB	○	○	○	○	○	○
外殼	○	○	○	○	○	○
電源供應器	—	○	○	○	○	○
其他及其配件	—	○	○	○	○	○

備考1. “超出0.1 wt %” 及 “超出0.01 wt %” 係指限用物質之百分比含量超出百分比含量基準值

Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. “○” 係指該項限用物質之百分比含量未超出百分比含量基準值。

Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. “—” 係指該項限用物質為排除項目。

Note 3: The “—” indicates that the restricted substance corresponds to the exemption.




Продукт сертифіковано згідно с правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Safety Information




CAUTION: To reduce the risk of fire, electric shock, or injury to persons:


- For indoor use only.
- Do not place in reach of children.
- NOT FOR EMERGENCY LIGHTING.
- Light strips only connect to adjacent units.
- Suitable for surface and cabinet mounting.
- Operating Temperature: -20°C~40°C(-4°F~104°F)
- Use only insulated staples or plastic ties to secure cords.
- Not intended for recessed installation in ceilings, or soffit.
- Do not use the device where wireless devices are not allowed.
- Keep the device away from water, fire, wet or hot environments.
- Adapter shall be installed near the equipment and shall be easily accessible.

- The maximum distance to the receptacle is determined by the length of adapter cord.
- Only use the control provided with or specified by these instructions to control this device.
- Switch off the power supply to the device and allow sufficient time for it to cool before handling it.
- Suitable for dry and damp locations, keep the device away from water, fire, wet or hot environments.
- Route and secure cords so that they will not be pinched or damaged when the cabinet is pushed to the wall.
- Do not use damaged charger to charge the device. Do not use any other charger than those recommended.
- Avoid placing controller box in areas surrounded by metal or near other devices designed to receive or transmit radio signals.
- Position the portable cabinet light with respect to the cabinet so the lamp replacement markings are able to be read during replacing;
- Please disconnect this strip from AC outlet before cleaning. Do not use liquid or detergent to clean the product. Only use a dry cloth. Drop or fall could cause injury.
-  Use only power supplies which are provided by manufacture and in the original packing of this product, if you have any questions, please don't hesitate to contact us.
- The National Electrical Code (NEC) does not permit cords to be concealed where damage to insulation may go unnoticed. To prevent fire danger, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

Explanation of the symbols on the product label

Symbol	Explanation
	Indoor use only
	AC voltage
	Direct current

Symbol	Explanation
	<p>RECYCLING</p> <p>This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.</p> <p>User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.</p>