


# GE Z-Wave Portable Smart Motion Sensor

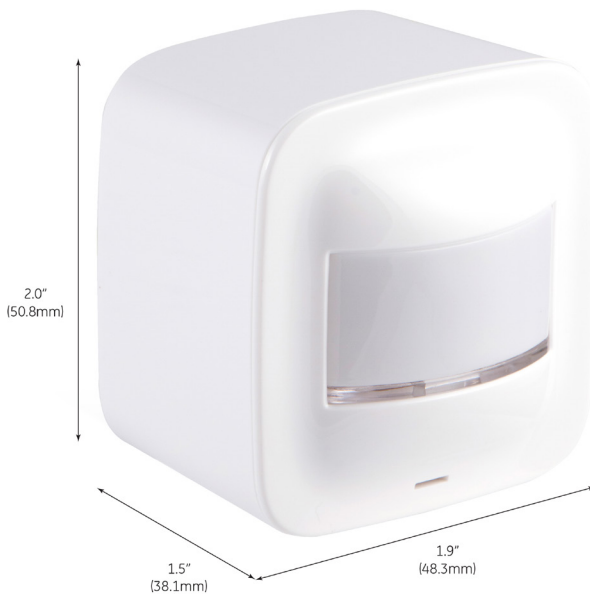

## Specifications

**Power:** 2 x CR123A Batteries or Micro USB

**Signal Frequency:** 908.4/916

**Range:** Up to 150 feet from controller or closest Z-Wave device

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 2-year limited product warranty

**For indoor use only.**

## Design Features

### · Remote Monitoring

Monitor doors from a distance with smartphones or tablets\*

### · Trigger Automations

Activate scenes or lights when door is opened or closed

### · Sends Alerts

Be notified when activity is detected

### · Dual Power Options

Runs for up to 2 years using CR123A batteries (included) or use the Micro USB port (cable not included)

### · OTA (Over-the-Air)

Updateable Utilizes the Z-Wave Firmware Update Meta Data command class for standardized wireless firmware updates

· Visit <http://www.ezwave.com/hubs/> for hub compatibility

· Trilingual Instruction manual – (English, French, Spanish)

### Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home


\* Requires Z-Wave hub or controller, functions may vary depending on brand.

### Mounting hardware included



**Detection Zone**

The Smart Motion Dimmer covers up to a 180° range, up to 45 feet away. It's effective in small or large rooms.

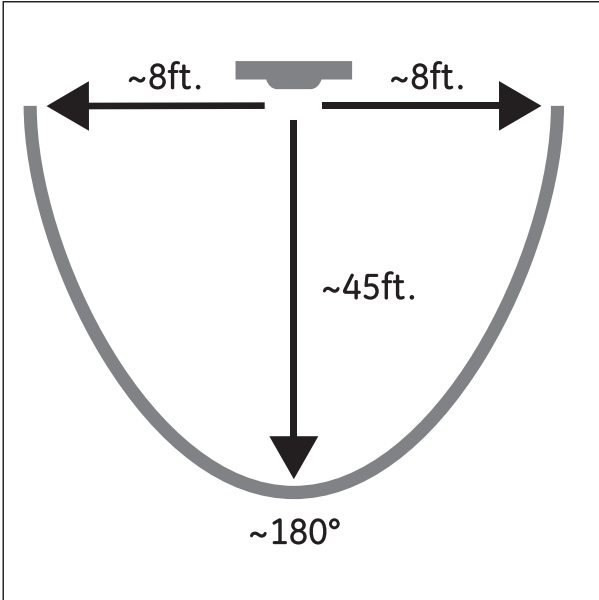

**Tabletop, Wall or Ceiling Mount**

Ball joint positions motion sensor at any angle.



**Device Configuration**

**Adding your device to a Z-Wave network**

Once the hub is ready to add your smart motion sensor, press and release button on the smart motion sensor to add it in the network.

**To remove and reset the device**

Once the controller is ready to remove your device, press and release the button on the smart motion sensor to remove it from the network.

**To return to factory defaults**

Press the button 10 times within 6 seconds (interval between presses cannot be longer than 1 second). Blue LED will blink for 3 seconds to signal a successful reset.

**Certifications & Compliances**



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

**Related GE Z-Wave Products**



**32563**  
Hinge Pin Smart Door Sensor



**35931**  
Smart LED Bulb



**26931**  
In-Wall Smart Motion Switch



**26933**  
In-Wall Smart Motion Dimmer