


## T2SK78 (Kit)

Access & Power Integration Solution for Software House



Altronix T2SK78 kit consists of Trove2 enclosure, TSH2 Software House/Altronix backplane with one (1) 24VDC @ 10A power supply/charger, one (1) fused access power controller, one (1) voltage regulator and one (1) dual input fused power distribution module. This kit also accommodates various combinations of Software House boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

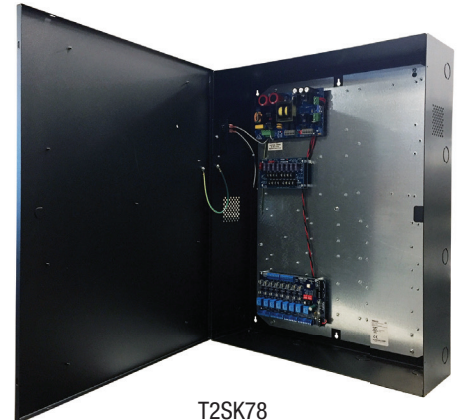

T2SK78

*Software House boards are not included*

### Key Features

- 24VDC power supply/charger
- Accommodates the following Software House controllers:  
iStar Ultra GCM and iStar Ultra ACM boards or  
iSTAR Pro GCM and iSTAR ACM SE/PRO ACM boards,  
as well as I8, R8, and I8-CSI boards
- Convenient knockout configuration:
  - One (1) single knockout 2.415" (2" Conduit)
  - Sixteen (16) double knockouts  
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Agency Listings:
  - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
    - UL: UL294 - Access Control System
    - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
  - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty\*

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

**Specifications**

**Power Supply (AL1024ULXB2):**

**Input**

Voltage 115VAC 60Hz, 4.2A max.  
Input Fuse 5A/250V

**Outputs**

Voltage 24VDC  
Current 10A @ 24VDC continuous max.  
Other Overvoltage protection. Filtered and regulated

**Battery Charging**

Capacity 12VDC/12AH (2 within enclosure)  
40AH/65AH (requires separate enclosure)  
Type Sealed lead acid or gel type  
Failover Upon AC loss, instantaneous  
Batteries are sold separately

**Supervision**

AC Failure Form "C" contacts  
Battery Form "C" contacts

**Indicators (LED)**

Input 115VAC is present  
DC Output Powered  
Battery Discharged or not connected

**Dual Input Power Distribution Module (PDS8):**

**Input**

Voltage 24VDC from AL1024ULXB2 and  
12VDC from VR6  
Input Fuses 10A/32V

**Outputs**

Voltage 12VDC and/or 24VDC  
Any of the eight (8) power outputs are selectable  
to follow power Input 1 or Input 2  
Individual outputs may be set to OFF position for servicing  
Output Fuses 3A/32V

**Indicators (LED)**

DC Output Eight (8) individual output LEDs  
Green: 12VDC  
Red: 24VDC

**Voltage Regulator (VR6):**

**Input**

Voltage 24VDC from AL1024ULXB2

**Output**

Voltage 12VDC  
Current 6A continuous  
Other Surge suppression

**Indicators (LED)**

Input 24VDC is present  
Output Powered

**Access Power Controller (ACM8):**

**Input**

Voltage 24VDC from AL1024ULXB2  
Input Fuse 10A/250V

**Outputs**

Voltage 24VDC  
Eight (8) independently controlled fused outputs:  
a) Fail-Safe and/or Fail-Secure power outputs  
Form "C" Relays rated 28VAC or VDC @ 2.5A  
b) Auxiliary power outputs (unswitched)  
c) Any combination of the above

Output Fuses 3.5A/250V

**Indicators (LED)**

Red LEDs Outputs are triggered (relays energized)  
Green LED FACP disconnect is triggered

**T2SK78 Kit:**

**Agency Listings**

All components of this Trove kit are UL Listed sub-assemblies  
Please refer to the corresponding Sub-Assembly Installation Guides  
for further information

CE European Conformity

**Physical and Environmental**

**Dimensions (H x W x D)**

Enclosure:  
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)  
Shipping:  
32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

**Weight (approx.)**

Product 54.3 lb. (24.6 kg)  
Shipping 59.3 lb. (26.9 kg)

**Temperature**


Operating 0°C to 49°C (32°F to 120°F)  
Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 128 BTU/Hr.

**Access Controller Position Chart for the Following Models:**

Software House	Pem Mounting
iStar Pro GCM	(A)
iStar Ultra GCM	(B)
iStar Pro ACM, iSTAR ACM SE	(C)
iStar Ultra ACM	(D)
I8, R8 or I8-CSI	(E)

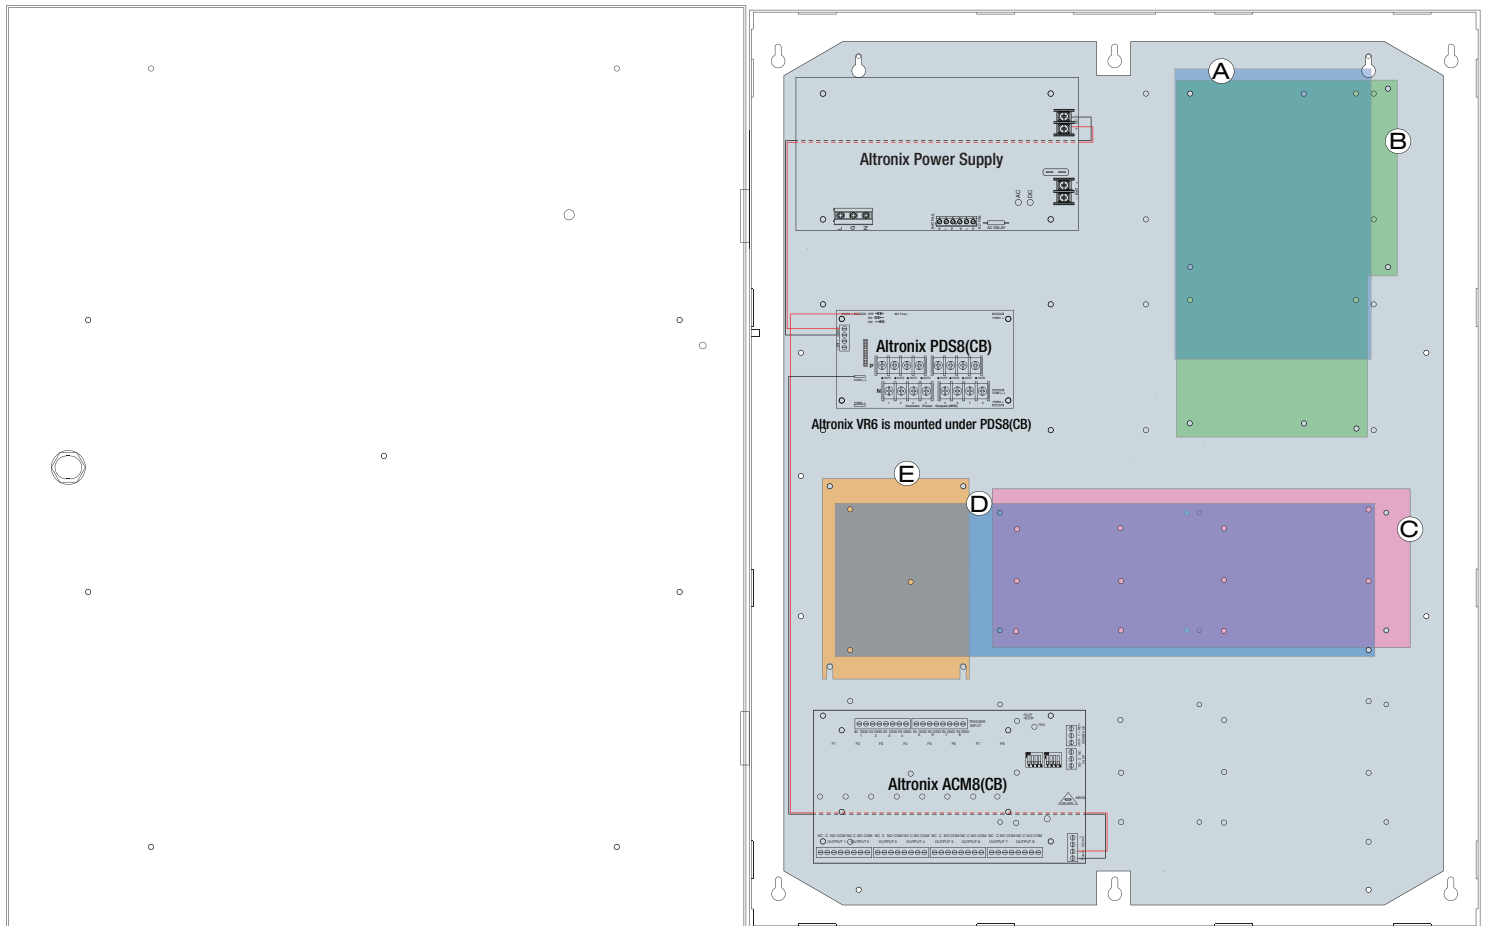

**Accessories** (order separately)



WM5

**WM5, WM25, WM100 - Magnetic Cable Tie Mounts**


Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

**MM4, MM8, MM12, MM24 - Magnetic Mounting Solution**

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

**BR1 - Sub-Assembly Mounting Bracket**

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC  
with  
batteries



Trove2BWC  
with  
wires



**TROVE2BWC - Battery/Wire Trough Enclosure**

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

**Dimensions and Drawing**

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

