

TROVE™

Access & Power Integration

Altronix/Lenel-S2 (S2 Security Platform) Kits

Models Include:

T2SSK78

8 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove2 enclosure with TSS2 Altronix/Lenel-S2 (S2 Security Platform) backplane
- One (1) AL1024ULXB2 - Power Supply/Charger
- One (1) ACM8 - Fused Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8 - Dual Input Fused Power Distribution Module
- One (1) RSB1 - Rocker Switch Bracket with One (1) Rocker Switch
(Not evaluated by UL)

T2SSK7514

14 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove2 enclosure with TSS2 Altronix/Lenel-S2 (S2 Security Platform) backplane
- One (1) AL1024ULXB2 - Power Supply/Charger
- One (1) AL1012ULXB - Power Supply/Charger
- Two (2) ACM8 - Fused Access Power Controllers
- Two (2) PD8UL - Fused Power Distribution Modules
- One (1) RSB2 - Rocker Switch Bracket with Two (2) Rocker Switches
(Not evaluated by UL)

T3SSK7528

28 Door Kit with Fused Outputs

Fully assembled kit includes:

- Trove3 enclosure with TSS3 Altronix/Lenel-S2 (S2 Security Platform) backplane
- One (1) AL1024ULXB2 - Power Supply/Charger
- One (1) AL1012ULXB - Power Supply/Charger
- Three (3) ACM8 - Fused Access Power Controllers
- One (1) ACM4 - Fused Access Power Controller
- Two (2) PD16W - Fused Power Distribution Modules
- One (1) RSB2 - Rocker Switch Bracket with Two (2) Rocker Switches
(Not evaluated by UL)

T2SSK78D

8 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove2 enclosure with TSS2 Altronix/Lenel-S2 (S2 Security Platform) backplane
- One (1) AL1024ULXB2 - Power Supply/Charger
- One (1) ACM8CB - PTC Access Power Controller
- One (1) VR6 - Voltage Regulator
- One (1) PDS8CB - Dual Input PTC Power Distribution Module
- One (1) RSB1 - Rocker Switch Bracket with One (1) Rocker Switch
(Not evaluated by UL)

T2SSK7514D

14 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove2 enclosure with TSS2 Altronix/Lenel-S2 (S2 Security Platform) backplane
- One (1) AL1024ULXB2 - Power Supply/Charger
- One (1) AL1012ULXB - Power Supply/Charger
- Two (2) ACM8CB - PTC Access Power Controllers
- Two (2) PD8ULCB - PTC Power Distribution Modules
- One (1) RSB2 - Rocker Switch Bracket with Two (2) Rocker Switches
(Not evaluated by UL)

T3SSK7528D

28 Door Kit with PTC Outputs

Fully assembled kit includes:

- Trove3 enclosure with TSS3 Altronix/Lenel-S2 (S2 Security Platform) backplane
- One (1) AL1024ULXB2 - Power Supply/Charger
- One (1) AL1012ULXB - Power Supply/Charger
- Three (3) ACM8CB - PTC Access Power Controllers
- One (1) ACM4CB - PTC Access Power Controller
- Two (2) PD16WCB - PTC Power Distribution Modules
- One (1) RSB2 - Rocker Switch Bracket with Two (2) Rocker Switches
(Not evaluated by UL)

All components of these Trove kits are UL Listed sub-assemblies.

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

Installation Guide



All registered trademarks are property of their respective owners.

Rev. TSSKL2_062223

Installing Company: _____ Service Rep. Name: _____

Address: _____ Phone #: _____



More than just power.™

Overview:

Altronix T2SSK78 and T2SSK7514 Trove S2 kits are pre-assembled and consist of Trove enclosures/backplanes with factory installed Altronix power supply/chargers and sub-assemblies. Both kits accommodate Lenel-S2 (S2 Security Platform) S2-INST Installation Kit for S2 Network Node for up to eight (8) (T2SSK78(D)) or fourteen (14) (T2SSK7514(D)) doors in a single enclosure.

Configuration Chart:


Altronix Model Number	115VAC 60Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Nominal DC Output Voltage Range (DC)		Maximum Supply Current for Main Outputs on Power Supply board and ACM8(CB) Access Power Controllers' outputs	Fail-Safe/ Fail-Secure Outputs	Additional Fused (PTC) Outputs	ACM8(CB) Board Input Fuse Rating	ACM8(CB) Board Output Fuse (PTC) Rating	ACM4(CB) Board Input Fuse Rating	ACM4(CB) Board Output Fuse (PTC) Rating	PDS8(CB) Board Input Fuse (PTC) Rating	PDS8(CB) Board Output Fuse (PTC) Rating	PD8UL(CB) Board Output Fuse (PTC) Rating	PD16W(CB) Board Output Fuse (PTC) Rating
				Power Supply 1	Power Supply 2											
T2SSK78	4.2	5A/250V	15A/32V	20.17-26.4	-	24VDC @ 9.7A	8	8	10A/250V	3.5A/250V	-	-	10A/32V	3A/32V	-	-
T2SSK78D										2.5A		-	9A	2.5A	-	-
T2SSK7514	6.8	5A/250V	15A/32V	20.17-26.4	9.7-13.2	24VDC @ 9.4A	16	16	10A/250V	3.5A/250V	-	-	-	-	3.5A/250V	-
T2SSK7514D										2.5A		-	-	-	2.5A	-
T3SSK7528	6.8	5A/250V	15A/32V	20.17-26.4	9.7-13.2	24VDC @ 9.4A	28	32	10A/250V	3.5A/250V	10A/32V	3A/32V	-	-	3.5A/250V	3.5A/250V
T3SSK7528D										2.5A		2.5A	-	-	-	2.5A

Installation Instructions:

Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

1. Remove backplane from enclosure. Do not discard hardware.
2. Mark and predrill holes in the wall to line up with the top two/three keyholes in the enclosure. Install two/three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the two/three upper screws; level and secure. Mark the position of the lower three holes. Remove the enclosure. Drill the lower holes and install the three fasteners. Place the enclosure's upper keyholes over the two/three upper screws. Install the three lower screws and make sure to tighten all screws.
3. Mount included UL Listed tamper switch (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure approximately 2" from the right side (*Fig. 1, pg. 2*). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.
4. Mount S2-INST Installation Kit to backplane, refer to *pages 3, 4*.
5. Refer to the *ULXB Power Supply/Charger Installation Guide* for AL1024ULXB2 and AL1012ULXB and corresponding *Sub-Assembly Installation Guides* for ACM8(CB), PDS8(CB), VR6, PD8UL(CB) and PD16W(CB) for further installation instructions.

Fig. 1

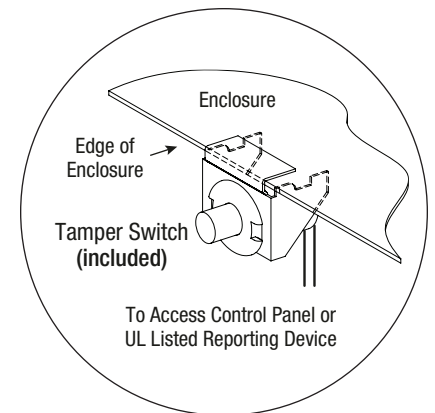

Hardware:



T2SSK78(D): Access Controller Position Chart for the S2-INST Installation Kit:

1. Align S2-INST mounting holes with pems on TSS2 (Fig. 2, pg. 3).
2. Attach S2-INST to backplane with lock nuts (provided) (Fig. 2a, pg. 3).
3. Mount backplane to enclosure with hardware.
4. Fasten TSS2 backplane to Trove2 enclosure utilizing hardware (provided).

Fig. 2

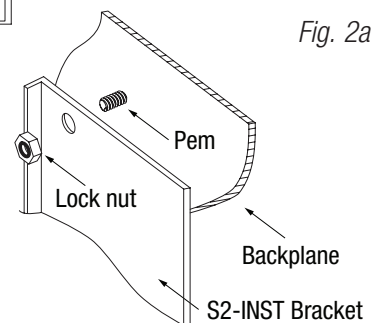
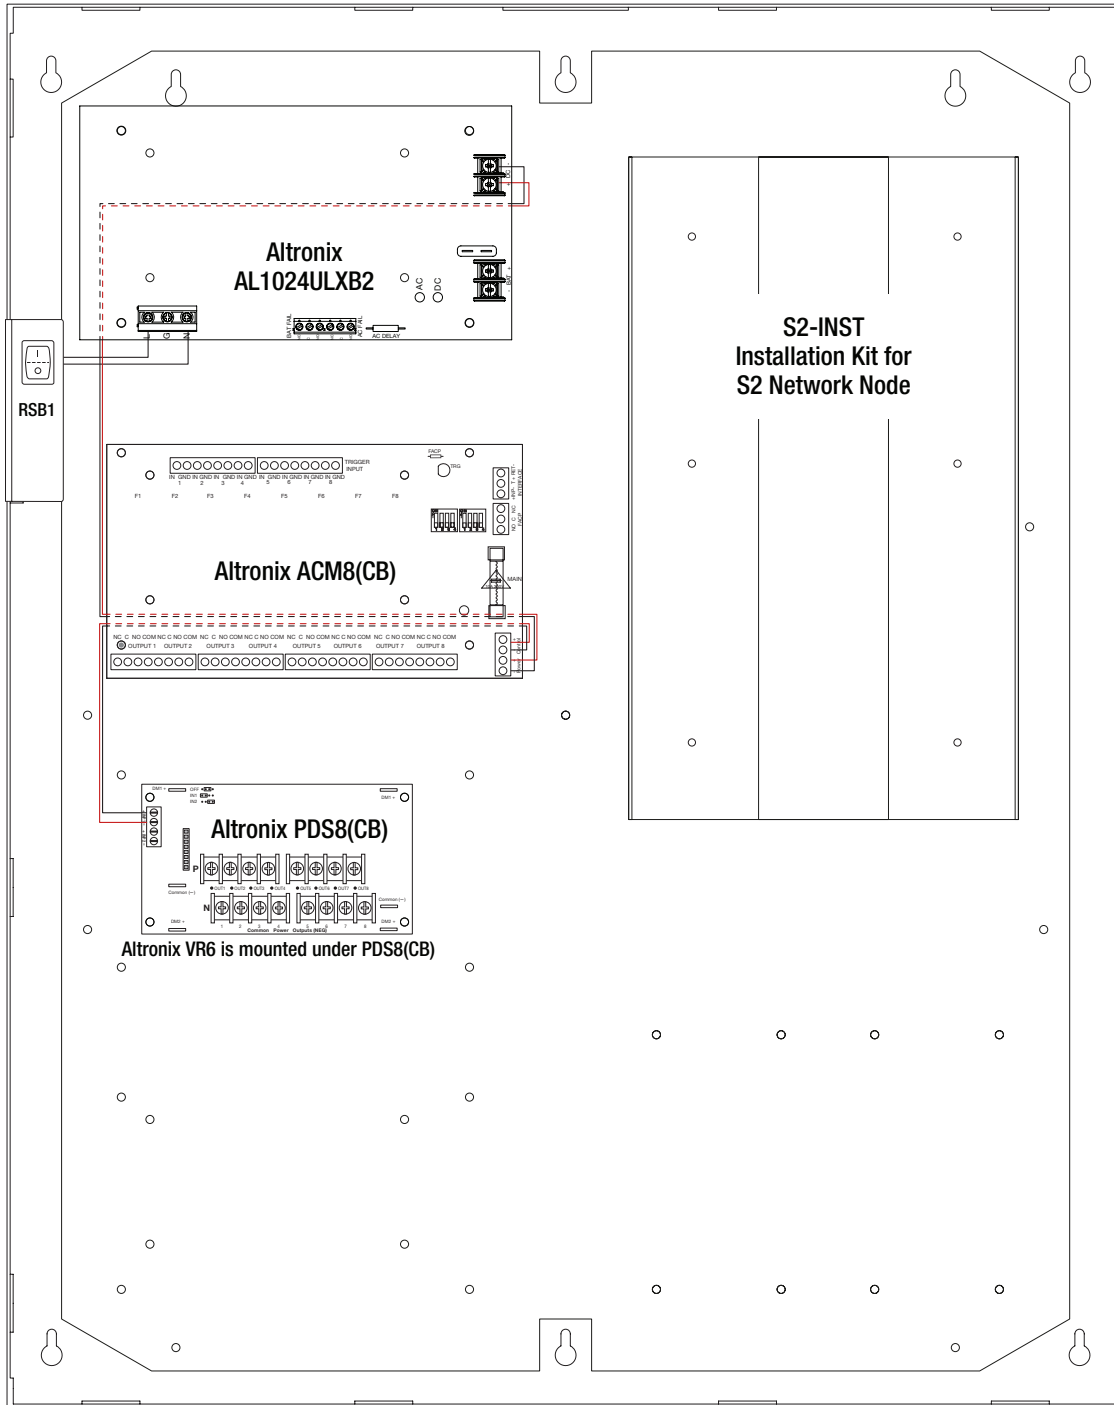


Fig. 2a

T2SSK7514(D): Access Controller Position Chart for the S2-INST Installation Kit:

1. Align S2-INST mounting holes with pems on TSS2 (Fig. 3, pg. 4).
2. Attach S2-INST to backplane with lock nuts (provided) (Fig. 3a, pg. 4).
3. Mount backplane to enclosure with hardware.
4. Fasten TSS2 backplane to Trove2 enclosure utilizing hardware (provided).

Fig. 3

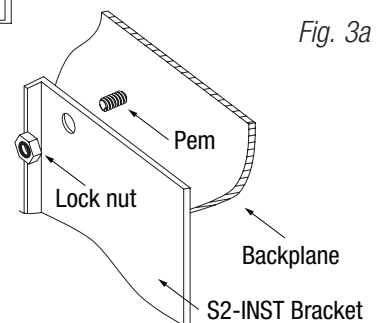
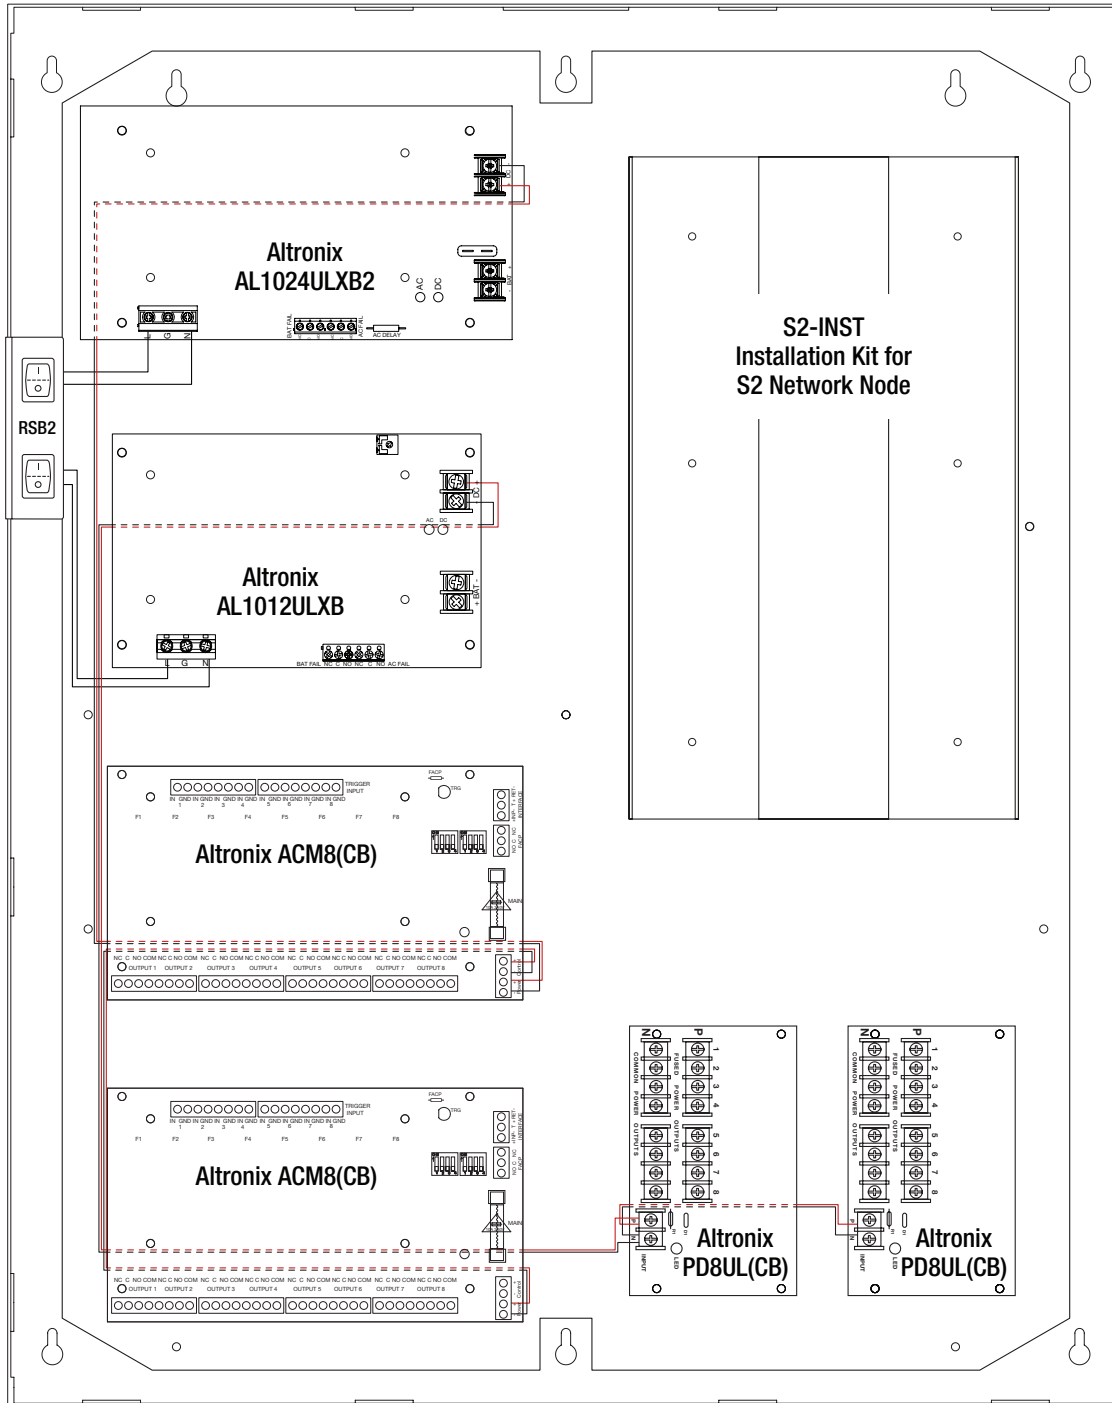


Fig. 3a

T3SSK7528(D): Access Controller Position Chart for the S2-INST Installation Kit:

1. Align S2-INST mounting holes with pems on TSS3 (Fig. 4, pg. 5).
2. Attach S2-INST to backplane with lock nuts (provided) (Fig. 4a, pg. 5).
3. Mount backplane to enclosure with hardware.
4. Fasten TSS3 backplane to Trove3 enclosure utilizing hardware (provided).

Fig. 4



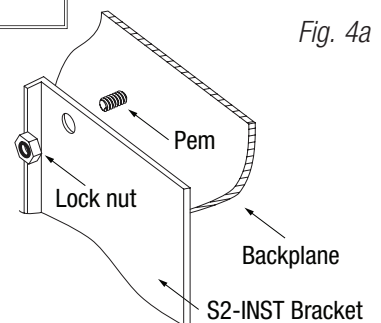


Fig. 4a

Notes:


T2SSK78(D) and T2SSK7514(D) Enclosure Dimensions (H x W x D):

27.25" x 21.75" x 6.5" (692.2mm x 552.5mm x 165.1mm)

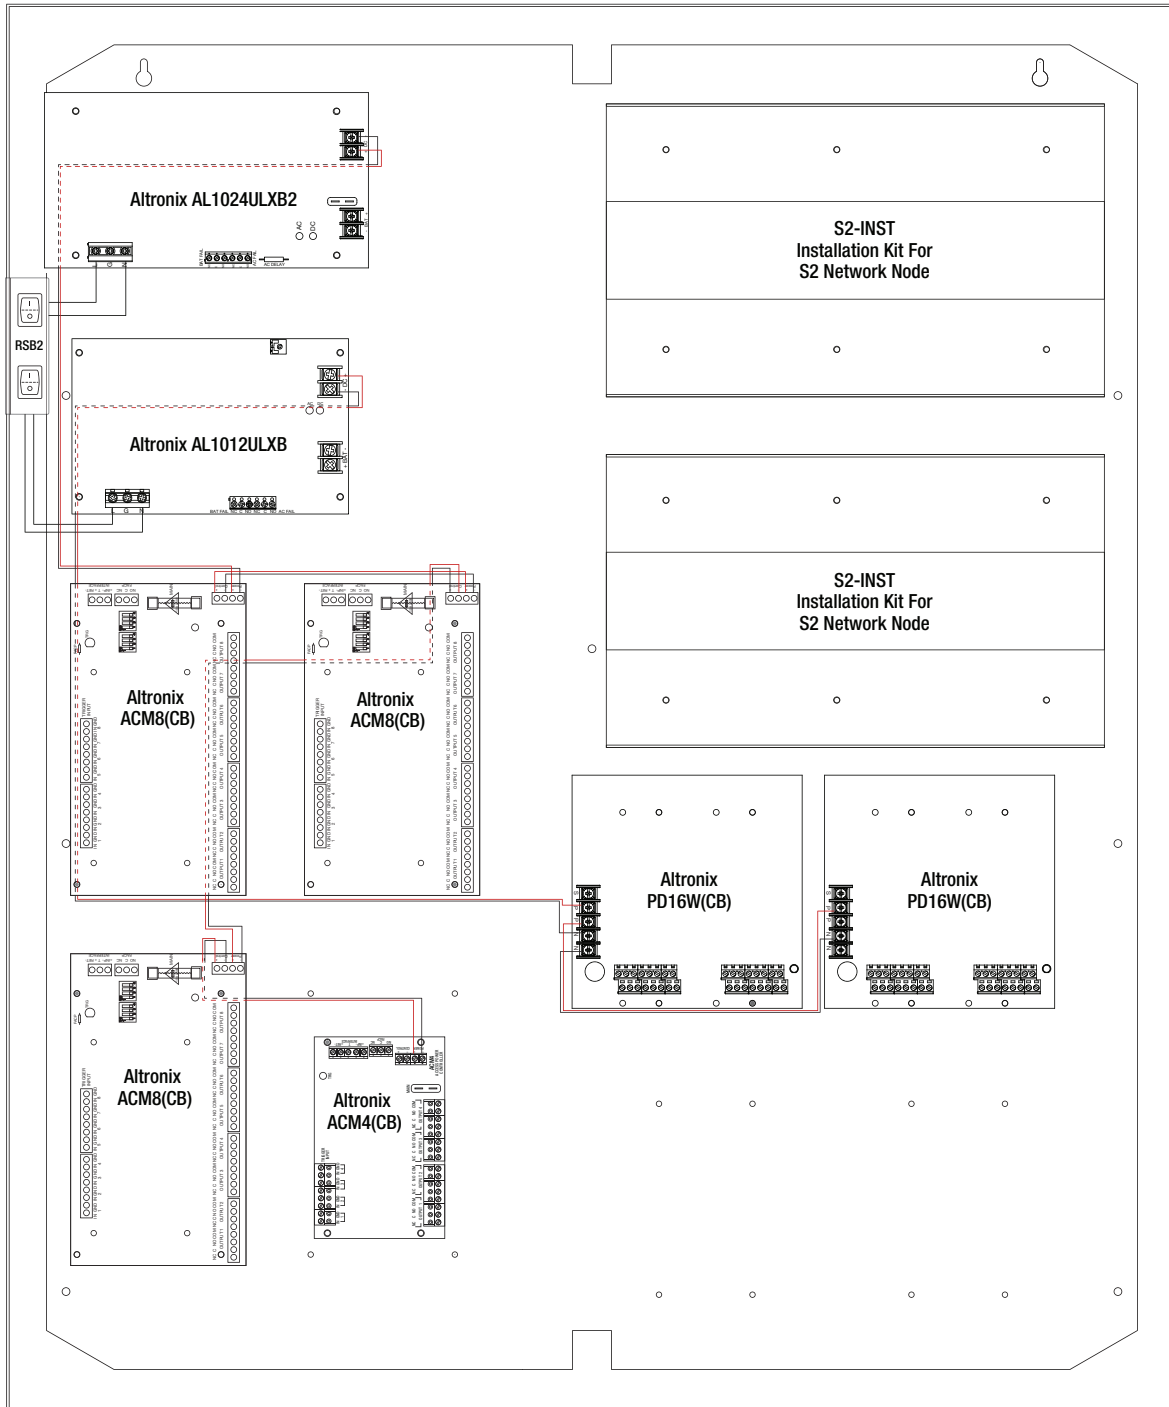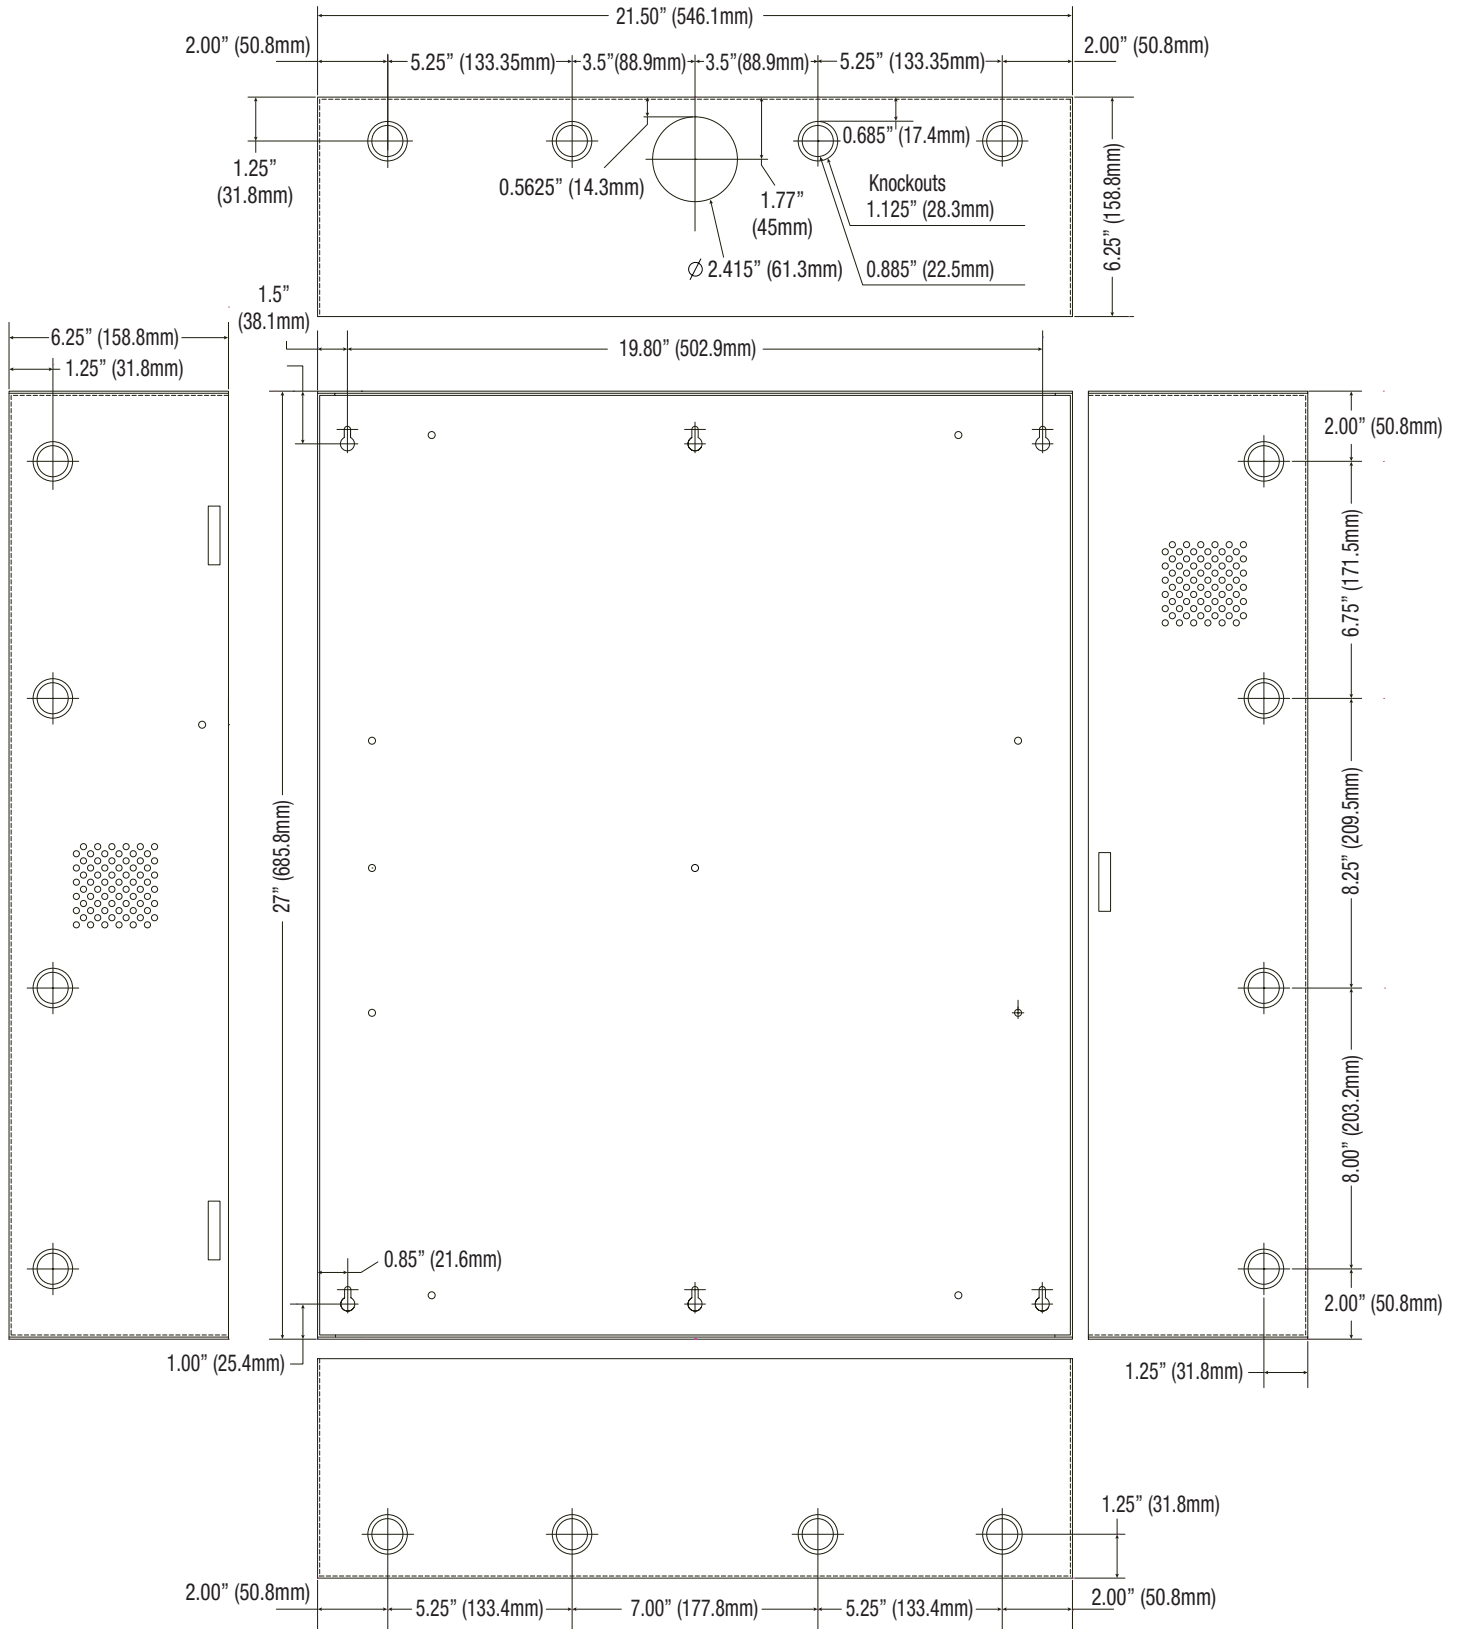

T3SSK7528(D) Enclosure Dimensions (H x W x D approximate):

36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

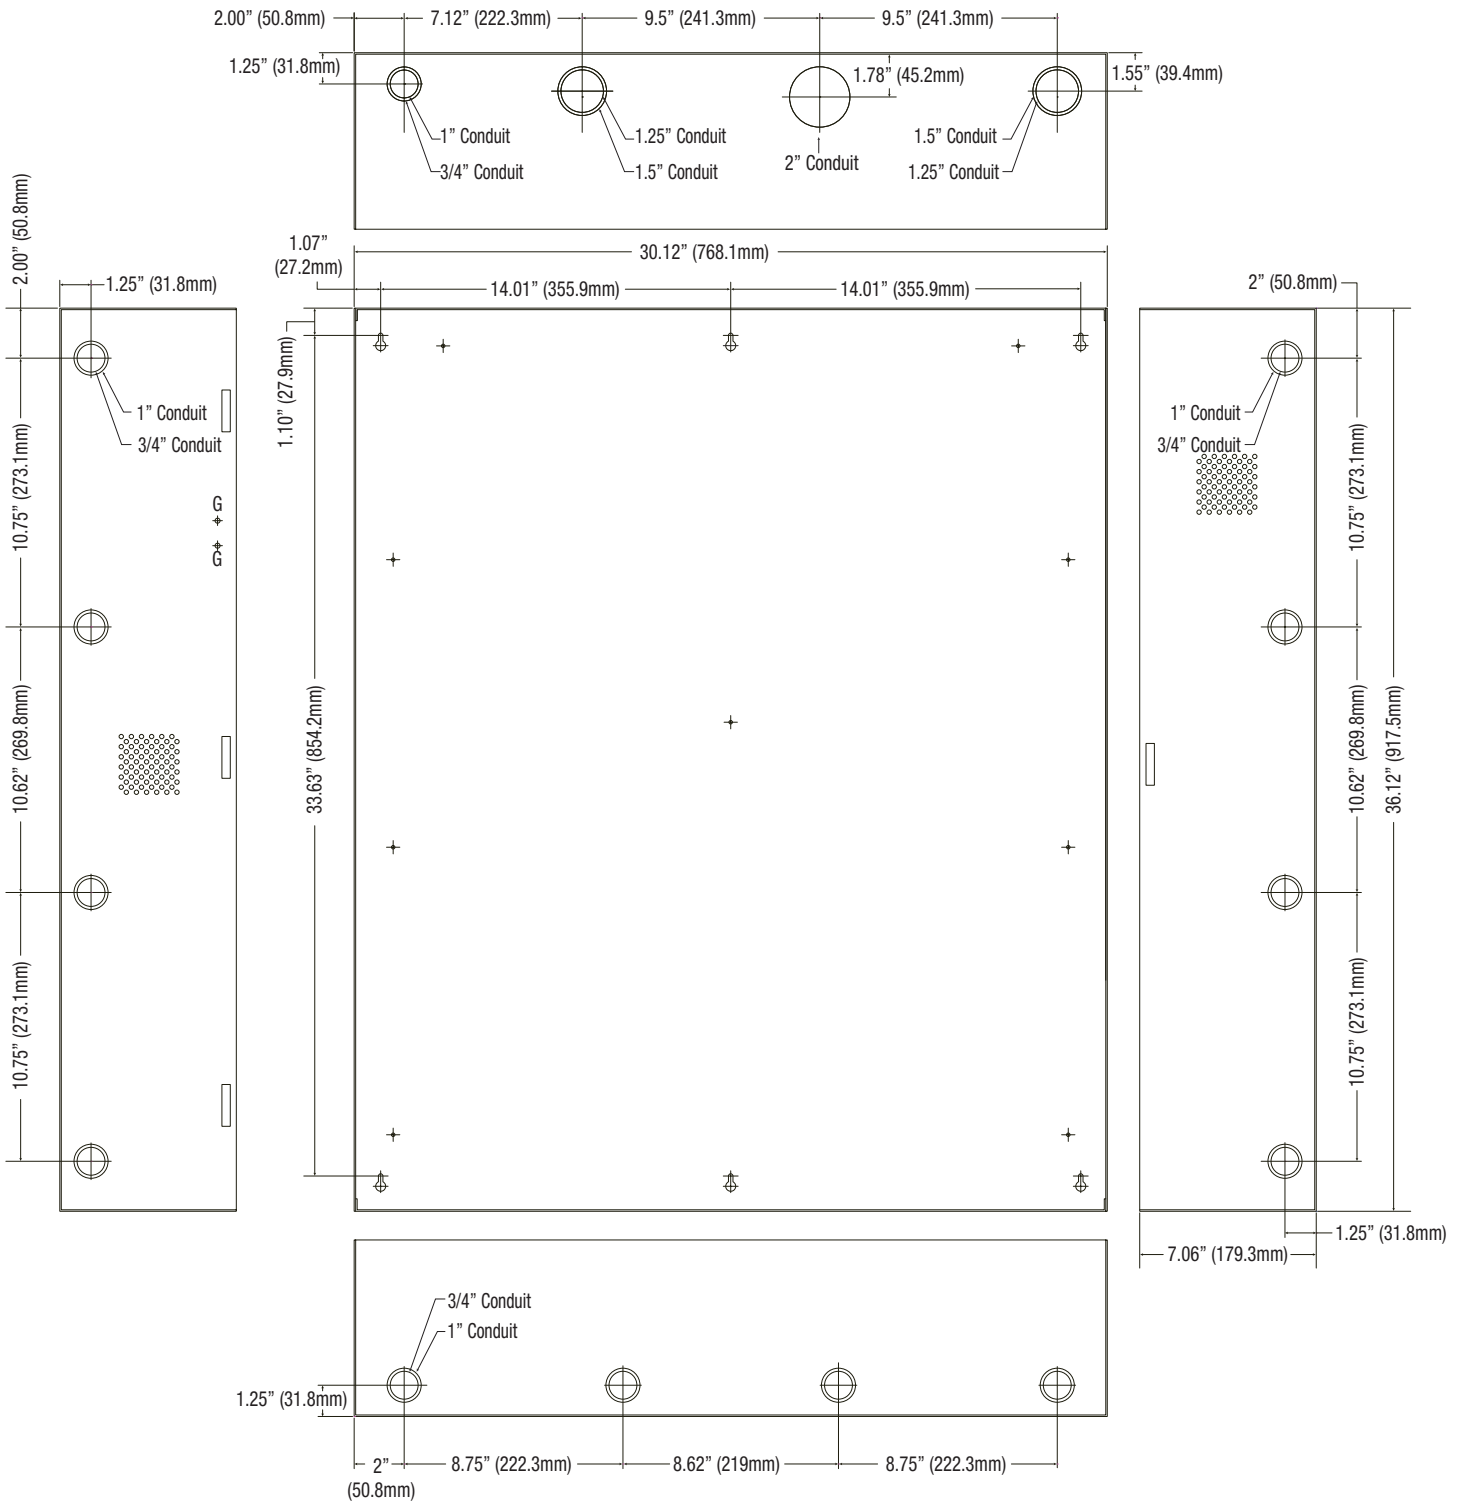

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 web site: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
 IITrove SS ULXB Kits

F22W

