

Network Video Recorder

Operation Manual

DR-6508P

DR-6516P(-A)

DR-6532P(-A)

Before reading this manual

This operation manual contains basic instructions on installing and using DirectIP™ Network Video Recorder, an IDIS product. Users who are using this product for the first time, as well as users with experience using comparable products, must read this operation manual carefully before use and heed to the warnings and precautions contained herein while using the product. Safety warnings and precautions contained in this operation manual are intended to promote proper use of the product and thereby prevent accidents and property damage and must be followed at all times. Once you have read this operation manual, keep it at an easily accessible location for future reference.

- ☒
- The manufacturer will not be held responsible for any product damage resulting from the use of unauthorized parts and accessories or from the user's failure to comply with the instructions contained in this operation manual.
 - It is recommended that first-time users of DirectIP™ Network Video Recorder and individuals who are not familiar with its use seek technical assistance from their retailer regarding product installation and use.
 - If you need to disassemble the product for functionality expansion or repair purposes, you must contact your retailer and seek professional assistance.
 - Both retailers and users should be aware that this product has been certified as being electromagnetically compatible for commercial use. If you have sold or purchased this product unintentionally, please replace with a consumer version.

Safety Precautions



CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER (OR BACK).
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Symbol	Publication	Description
	IEC60417, No.5032	Alternating current

WARNING
Hazardous moving parts
Keep away from moving fan blades

AVERTISSEMENT
Pièces mobiles dangereuses
Se tenir éloigné des pales de ventilateurs mobiles

1. Read Instructions

All the safety and operating instructions should be read before the appliance is operated.

2. Retain Instructions

The safety and operating instructions should be retained for future reference.

3. Cleaning

Unplug this equipment from the wall outlet before cleaning it. Do not use liquid aerosol cleaners. Use a damp soft cloth for cleaning.

4. Attachments

Never add any attachments and/or equipment without the approval of the manufacturer as such additions may result in the risk of fire, electric shock or other personal injury.

5. Water and/or Moisture

Do not use this equipment near water or in contact with water.

6. Ventilation

Place this equipment only in an upright position. This equipment has an open-frame Switching Mode Power Supply (SMPS), which can cause a fire or electric shock if anything is inserted through the ventilation holes on the side of the equipment.

7. Accessories

Do not place this equipment on an unstable cart, stand or table. The equipment may fall, causing serious injury to a child or adult, and serious damage to the equipment. Wall or shelf mounting should follow the manufacturer's instructions, and should use a mounting kit approved by the manufacturer.



This equipment and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the equipment and cart combination to overturn.

8. Power Sources

This equipment should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power, please consult your equipment dealer or local power company. You may want to install a UPS (Uninterruptible Power Supply) system for safe operation in order to prevent damage caused by an unexpected power stoppage. Any questions concerning UPS, consult your UPS retailer.

This equipment should be remain readily operable.

9. Power Cords

Operator or installer must remove power and TNT connections before handling the equipment.

10. Lightning

For added protection for this equipment during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the equipment due to lightning and power-line surges.

11. Overloading

Do not overload wall outlets and extension cords as this can result in the risk of fire or electric shock.

12. Objects and Liquids

Never push objects of any kind through openings of this equipment as they may touch dangerous voltage points or short out parts that could result in a fire or electric shock. Never spill liquid of any kind on the equipment.

13. Servicing

Do not attempt to service this equipment yourself. Refer all servicing to qualified service personnel.

14. Damage requiring Service

Unplug this equipment from the wall outlet and refer servicing to qualified service personnel under the following conditions:

- A. When the power-supply cord or the plug has been damaged.
- B. If liquid is spilled, or objects have fallen into the equipment.
- C. If the equipment has been exposed to rain or water.
- D. If the equipment does not operate normally by following the operating instructions, adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the equipment to its normal operation.
- E. If the equipment has been dropped, or the cabinet damaged.
- F. When the equipment exhibits a distinct change in performance — this indicates a need for service.

15. Replacement Parts

When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or that have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock or other hazards.

16. Safety Check

Upon completion of any service or repairs to this equipment, ask the service technician to perform safety checks to determine that the equipment is in proper operating condition.

17. Field Installation

This installation should be made by a qualified service person and should conform to all local codes.

18. Correct Batteries

Warning: Risk of explosion if battery is replaced by an incorrect type. Replace only with the same or equivalent type. Dispose of used batteries according to the instructions. The battery shall not be exposed to excessive heat such as sunshine, fire or the like.

Avertissement: risque d'explosion en cas d'utilisation d'une batterie de type incorrect. Le remplacer uniquement par un type identique ou équivalent.

Mettre les batteries usées au rebut conformément aux instructions. La batterie ne doit pas être exposée à une source de chaleur excessive, telle que le soleil, le feu, ou analogue.

19. Tmra

A manufacturer's maximum recommended ambient temperature (Tmra) for the equipment must be specified so that the customer and installer may determine a suitable maximum operating environment for the equipment.

20. Elevated Operating Ambient Temperature

If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the manufacturer's maximum rated ambient temperature (Tmra).

21. Reduced Air Flow

Installation of the equipment in the rack should be such that the amount of airflow required for safe operation of the equipment is not compromised.

22. Mechanical Loading

Mounting of the equipment in the rack should be such that a hazardous condition is not caused by uneven mechanical loading.

23. Circuit Overloading

Consideration should be given to connection of the equipment to supply circuit and the effect that overloading of circuits might have on over current protection and supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

24. Reliable Earthing (Grounding)

Reliable grounding of rack mounted equipment should be maintained. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g., use of power strips).

Important Safeguards

In-Text

Symbol	Type	Description
	Caution	Important information concerning a specific function.
	Note	Useful information concerning a specific function.

User's Caution Statement

Caution: Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

FCC Compliance Statement

THIS EQUIPMENT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS A DIGITAL DEVICE, PURSUANT TO PART 15 OF THE FCC RULES. THESE LIMITS ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST HARMFUL INTERFERENCE WHEN THE EQUIPMENT IS OPERATED IN A COMMERCIAL ENVIRONMENT. THIS EQUIPMENT GENERATES, USES, AND CAN RADIATE RADIO FREQUENCY ENERGY AND IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTION MANUAL, MAY CAUSE HARMFUL INTERFERENCE TO RADIO COMMUNICATIONS. OPERATION OF THIS EQUIPMENT IN A RESIDENTIAL AREA IS LIKELY TO CAUSE HARMFUL INTERFERENCE, IN WHICH CASE USERS WILL BE REQUIRED TO CORRECT THE INTERFERENCE AT THEIR OWN EXPENSE.

WARNING: CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

THIS CLASS OF DIGITAL APPARATUS MEETS ALL REQUIREMENTS OF THE CANADIAN INTERFERENCE CAUSING EQUIPMENT REGULATIONS.

WEEE (Waste Electrical & Electronic Equipment)

Correct Disposal of This Product

(Applicable in the European Union and other European countries with separate collection systems)



This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

Copyright

© 2025 IDIS Co., Ltd.

IDIS Co., Ltd. reserves all rights concerning this operation manual.

Use or duplication of this operation manual in part or whole without the prior consent of IDIS Co., Ltd. is strictly prohibited.

Contents of this operation manual are subject to change without prior notice.

Registered Trademarks

IDIS is a registered trademark of IDIS Co., Ltd.

Other company and product names are registered trademarks of their respective owners.

The information in this manual is believed to be accurate as of the date of publication even though explanations of some functions may not be included. We are not responsible for any problems resulting from the use thereof. The information contained herein is subject to change without notice. Revisions or new editions to this publication may be issued to incorporate such changes.

The software included in this product contains some Open Sources. You may obtain the corresponding source code which we have to distribute according to the license policy. Go to System Setup - About page for more information. This product includes software developed by the University of California, Berkeley and its contributors, and software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>). Also, this product includes cryptographic software written by Eric Young (eay@cryptsoft.com), and software written by Tim Hudson (tjh@cryptsoft.com).

Covered by one or more claims of the patents listed at patentlist.accessadvance.com.

Table of Contents

1

Part 1 - Getting Started	10
Setting Password	10
Setup Wizard	10
Camera Registration	14
Camera Scan Button	14
Camera View Buttons	17
Camera List Area	18
Video Display Area	18
Apply/Cancel Buttons	19
Diagnosis Process	20
Camera Registration Mode	20
Login	21
Live Menu	23
Zoom	26
PTZ Control	26
Dewarping Control (NVR)	28
Dewarping Control (Camera)	28
Event Monitoring	28
Covert Camera	29
Context Menu Access	29
Edit Group	30
Video Recording	30
Panic Recording	30
Audio Recording	31
Video Recording Playback	31
All Channel Playback	31
Remote Control Buttons during Playback	32
Context Menu	32

2

Part 2 - Configuration	33
Menu Use	33
Text Input via Virtual Keyboard	34
Batch Assignment	34
Mouse	34

System Setup	35
General	35
Date/Time	36
User	37
Security.....	39
Storage	41
Self-Diagnosis.....	42
Custom Value	44
About.....	44
Camera Setup	44
Registration.....	44
General	46
Advanced Setup	47
Stream I.....	54
Stream II	55
Audio.....	56
SD Card.....	57
Maintenance.....	58
Record Setup.....	58
General	58
Advanced Setup	59
Schedule.....	60
Pre-Event	62
Smart Failover.....	62
Statistics	63
Event Setup	64
System Event	64
Camera System	65
Camera System_Audio Detection	65
Camera System_Video Loss.....	66
Camera System_Recording Fail	67
Video-Analytics	67
Video-Analytics_Motion.....	68
Video-Analytics_Trip Zone.....	69
Video-Analytics_Tampering	71
IDLA (IDIS Deep Learning Analytics)	71
IDLA_Setup	71
Additional Event	77
Additional Event_Setup	77
VA Box	80
VA Box_Setup.....	80

VA Box_VA Loss	83
Device Setup	83
Alarm-Out	83
Alarm-Out_Setup	83
Alarm-Out_Schedule	84
Connector	84
Remote Control	85
VA Box	85
VA Box_Registration	85
VA Box_Setup	86
VA Box_Schedule	93
VA Box_Maintenance	93
Network Setup	94
General	94
IDIS Web	95
WAN	96
VIN	99
FEN	100
NetFS	101
RTSP	102
Firewall	102
NAT	103
Notification Setup	104
Schedule	104
Callback	105
Mail	106
Push	107
FTP	107
HTTP	108
Display Setup	109
Device	109
Screen	110
Event Monitoring	110
Sequence	110
OSD	110
Status Setup	111
Camera	111
Device	112
VA Box	112
System	112
Storage	113
Network	114

Part 3 - Search.....116

Time-Lapse Search	116
Context Menu.....	121
Text-In Search.....	122
Clip Copy	122
Event Log Search.....	124
Thumbnail Search	125
Overlapped Recording Search	126

Part 4 - IDIS Web.....127

Web Live Mode.....	129
Web Search Mode	132

Part 5 - Appendix.....135

NAT Function Example	135
Camera WebSetup Connection	136
IDIS Web Connection through IDIS Camera.....	136
IDIS Center Program Connection through IDIS Camera	137
RTSP Connection through IDIS Camera.....	138

Part 1 - Getting Started

✓ This document covers the 8-, 16-, and 32-channel network video recorders. The NVRs are identical except for the number of cameras and alarms that can be connected and the number of cameras that can be displayed. For simplicity, the illustrations and descriptions in this document refer to the 32-channel model.

Setting Password

- 1 The users must first run the system and then be required to set the password for the admin user account.
- 2 Follow the password setup instructions that appear when you click the ? button at the bottom left of the screen. Click the eye icon (👁 or 👁) next to the password input field to show or hide the password.

- ✓ It does not allow a user to run the system without a password.
- Click the question mark button on the bottom left corner and refer to the instruction on setting up a password.
- An email address and UPR files are required to find the password. Otherwise, you may not be able to find your password when you enter the incorrect information.

Setup Wizard

Setup Wizard lets you configure basic settings required for operating the system.

- ✓ Setup Wizard only appears during initial booting. When you login as an administrator account after initial booting, you can use Wizard to go to Live menu and select Wizard.

- 1 Select a system language.

- ✓ Select **Cancel** from any of the Wizard screen to cancel the setup process and return to the main setup menu.

Quick Wizard

1 Select Quick Wizard.

2 Specify the current date and time and then click **Next**.



- The new date and time settings will only be applied after clicking **Next**.
- For more information on date and time settings, refer to the **Date/Time** section under **System Setup on page 35**.

3 Choose the desired **Recording Method** and click **Next**.

4 Choose the desired **Recording Quality** and click **Next**.



- Higher recording quality uses up more disk space.
- Recording resolution is determined based on the selected recording quality.
 - **High Video Quality Priority Profile:** Very high
 - **Standard Recording Profile:** High
 - **Longer Recording Time Priority Profile:** Standard

Part 1 - Getting Started

- Recording resolutions used under each recording method and record video quality setting are as follows:

	High Video Quality Priority Profile	Standard Recording Profile	Longer Recording Time Priority Profile
Event Record	Profile 1	Profile 2	Profile 3
Continuous & Event Record	Profile 2 (Continuous) / Profile 1 (Event)	Profile 3 (Continuous) / Profile 2 (Event)	Profile 4 (Continuous) / Profile 3 (Event)
Continuous	Profile 1	Profile 2	Profile 4

5 Choose the desired codec and click **Next**.

Quick Setup Wizard (Step 5/6)

H.265 Camera Codec Setup

Select default codec for H.265 camera

- ☒ H.265 only mode (Optimal mode for storage space and network bandwidth)
- ☐ H.265 / H.264 Hybrid mode (Optimal mode for storage space and remote monitoring)

H.265 only mode reduces both storage space and network bandwidth. Be aware that H.265 does increase processor load on remote monitoring PCs or Mobile devices.

H.265 / H.264 hybrid mode reduces both storage space and processor load for remote monitoring PCs or mobile devices. Recorded video is stored using the higher compression ratio of H.265, however, video streams to remote monitoring devices are compressed using H.264 which requires less processor power on remote monitoring PCs or mobile devices.

6 Click **Finish** to exit Quick Wizard.

Quick Setup Wizard (Step 6/6)

Now you have completed setup for basic operation.
Click the "Finish" button to start Network Setup.

Network Wizard

- ☒ After exiting from Quick Wizard, the network with Network Wizard will start automatically.

1 Select Network Wizard.

Network Setup Wizard (Step 1/5)

Network Wizard will help configure the Device for your Network.
Please make sure to connect an Ethernet cable between your device and router or cable modem.

The wizard includes:

- LAN Setup
- UPnP (Port forwarding) Setup
- FEN Setup

Click the "Next" button to start the wizard.

2 Specify whether the system is connected to the Internet and click **Next**.

Network Setup Wizard (Step 2/5)

Internet Connection

Is your Device connected to the Internet?

- ☒ Yes (I will use an Internet connection)
- ☐ No (I will Not use an Internet connection)

- ☒ If you have chosen **No**, wait for the test to finish and then click **Finish** to exit Network Wizard.

- 3 Select **Network Configuration** and then click **Next**. Select either **Auto Configuration** or **Manual Configuration** and then click **Test** to test the system's current network configuration.



- This test must be performed before proceeding to the next step.
- If the NVR is on a network connected to a network that has a DHCP server, selecting **Auto Configuration** retrieves LAN settings such as IP and DNS addresses automatically. Selecting **Manual Configuration**, on the other hand, lets you specify the settings manually.
- **UPnP support device not found.** If this error message is displayed, check to see if the IP router (or NAT) supports UPnP and if UPnP has been enabled. For more information about the router's UPnP function, refer to the router's operation manual.

- 4 Enter in the **Device Name** field the NVR name to be registered on the FEN server and then click **Check** to check its availability.




- The device name you register on the FEN server will be a unique name used to identify the NVR. Once registered, the name can be used to access the NVR directly from clients such as the IDIS Center. Check the name's availability to complete the registration process. The Finish button will then become activated.
- You will be prompted with an error message if you do not enter a name for the NVR or enter a name already registered on the FEN server.
- Depending on the network environment, FEN services may not be active and therefore prevent the NVR from connecting to the network. In this case, you will need to manually configure the ports.

- 5 Click **Finish** to exit Network Wizard.

Camera Registration

Once Network Setup Wizard is complete, live mode screen appears. While in live mode, right-click on the mouse and select Camera Registration to run the Camera Registration mode. It allows you to scan for the cameras connected to the NVR.

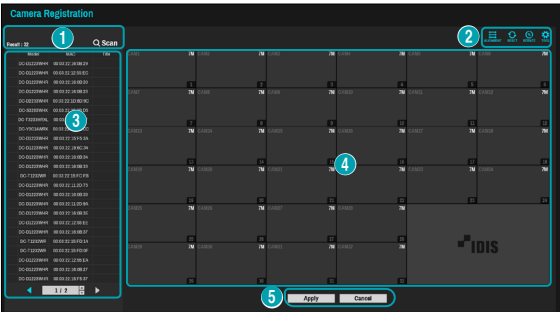


1	Camera Scan Button
2	Camera View Menus
3	Camera List Area
4	Video Display Area
5	Apply/Cancel Buttons

- ☒
- You can also register cameras on the remote program. For more information on the remote camera registration, refer to **Registration on page 13**.

Camera Scan Button

You can scan and search and register cameras that were not detected automatically or third party cameras. Pressing the **Scan** button displays the following sub-menu.




Rescan

Scans for DirectIP™ cameras that were not scanned automatically.

Manual Scan

Used to manually scan for third-party cameras that cannot be recognized by the auto scan feature.

- ☒
- Some functions may not be supported for the third-party cameras depending on their protocol and model.
 - The device to be registered must have different IP addresses. Otherwise, the connection may fail.

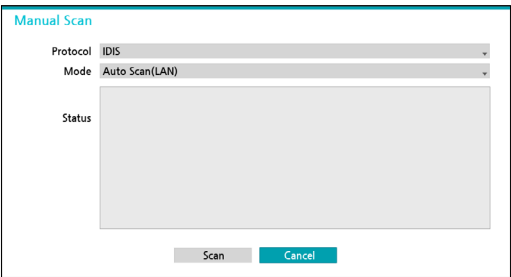

- Protocol:** Select the protocol used by the camera (or video encoder) you wish to search for.

- Some functions may not be supported for the third-party cameras depending on their protocol and model.
- This system is optimized for combination with IDIS cameras. When registering other cameras, recording performance cannot be guaranteed and it can be restricted from several functions if the related video settings exceed the system performance. In this case, please make adjustments to optimize the performance.
- When registering third-party cameras, they must not exceed 50% of total channels.

• **Mode:** Select the scan mode.

- Auto Scan (LAN):** Lists cameras in a LAN environment. If **Auto Scan (LAN)** fails to recognize a camera, try using **IP Address Scan** instead.
- IP Address Scan:** Enter the IP address of a camera. The NVR scans for the camera matching the specified address. If you enter IP address's range, the NVR scans for cameras falling under the specified address's range. By specifying an IP address, you can also specify which port to use with the Remote Admin feature. It is recommended that the camera not be networked via DHCP (Dynamic Host Configuration Protocol). If the camera is networked via DHCP, connection to the camera may not be made properly depending on changes in the external network environment.

1 Select **Scan** to commence scanning.

- Only cameras that are connected to the NVR via VIDEO IN ports can be scanned and registered.

2 Select a camera from the scan list and then select **Add Camera**. The device login window will appear.

3 Enter a **User ID** and a **Password** for the selected camera.

- The Find PW button is supported only on camera models that support the password reset feature.

Set Camera Password

For IDIS protocol cameras that support changing and finding the camera password, you must set the camera password at the time of initial camera registration. The email information is used to change and find the camera password.

<IDIS Protocol Cameras>

<IDIS Lite Protocol Cameras>

IDIS Lite protocol cameras offer **Enable remote password reset** function when setting the initial password. However, if this option is disabled, password recovery is not possible in case of loss, and only a factory reset will work.

Go To Camera

Moves the focus automatically to the camera using the MAC address and model of camera in the camera list.

Go To Camera

Mode

MAC

Value

Go to

Cancel

Search Scope

Filters the cameras in the camera list depending on the search scope such as specified IP address range.

Search Scope

Mode

IP Address

10.0.0.1

10.0.0.20

OK

Cancel

Screen Auto. Assign

Assigns the detected cameras on the video display area.

Camera list

By using the camera information file, .csv, the user can register the cameras easily.

Camera List

No.	MAC
☒ 1	00:03:22:34:BA:CC
☒ 2	00:03:22:11:2D:0C
☒ 3	00:03:22:11:2C:CF
☐ 4	None
☐ 5	None
☐ 6	None
☐ 7	None
☐ 8	None
☐ 9	None
☐ 10	None

Import

Export

OK

Cancel

- **Export** : Button : Exports the list of camera information on USB as a .csv file
- **Import** : Button : Imports a camera information file, .csv file. The user can edit a csv file directly.
- ☒
 - A column indicates camera number, B column the camera MAC address, C column the Video In port of the video encoder in the .csv file. C column indicates only for video encoders. If camera information displays as follows: 5,00:11:22:18:30:20,3, 5 = CAM 5, 5,00:11:22:18:30:20 = MAC address, 3 means video encoder.
 - Before using this feature, the cameras must be scanned first. If the cameras to be registered do not exist in the list, the camera cannot be registered.
 - This feature is not supported for the third-party cameras.

Scan Refresh Interval

Configures the refresh interval to scan the camera. If the interval is short, camera scan results are refreshed more frequently. However, if the interval is long, it is advantageous to scan cameras on a wide network.

Camera View Buttons

- **ALIGNMENT**  Button: Realigns camera screens displayed on the video display area in the order of **Video In** port connections.
- **RESET**  Button: Refreshes the video display area and the camera list.



Selecting **RESET** clears all scanned devices from the list.

- **Bitrate**  Button: Displays the following window to change the bitrate allocation for each channel.

Bitrate Allocation

1. Required Min.: 0M (Max.: 13M)

1. 7 Mbps	2. 7 Mbps	3. 7 Mbps	4. 7 Mbps
5. 7 Mbps	6. 7 Mbps	7. 7 Mbps	8. 7 Mbps
9. 7 Mbps	10. 7 Mbps	11. 7 Mbps	12. 7 Mbps
13. 7 Mbps	14. 7 Mbps	15. 7 Mbps	16. 7 Mbps
17. 7 Mbps	18. 7 Mbps	19. 7 Mbps	20. 7 Mbps
21. 7 Mbps	22. 7 Mbps	23. 7 Mbps	24. 7 Mbps
25. 7 Mbps	26. 7 Mbps	27. 7 Mbps	28. 7 Mbps
29. 7 Mbps	30. 7 Mbps	31. 7 Mbps	32. 7 Mbps

Total Bitrate: 224M (Max.: 230M)

  Registered Channel (*) Apply Cancel

When registering the camera, you can set the stream as much as the performance (bitrate) assigned to the channel. If high performance (bitrate) is not allocated, Quality, FPS and Resolution can be low. If a channel has a camera already registered, bitrates may not be lower than current stream settings. You can change the bitrate by pressing the + - button at the bottom left. Only the bitrate of the registered camera can be changed by checking the registered channel (*).

- **Tool**  Button: Displays network camera tool window to run a camera-related actions. There are Authentication, Screen Assignment and Camera Protocol Change for actions.

- 1 Select an **Action** to execute.
- 2 Select a camera from the list and press the **Apply** button.

Network Camera Tools

Action: Authentication Apply

Filter: All


No.	Model	MAC	IP Address	Protocol	Result
01	% DC-T4327H0X-A	00:03:22:88:48:43	189.254.247.31	DirectIP 2.0	
02	% DC-S3282W0X	00:03:22:36:28:05	189.254.170.106	DirectIP 2.0	
03	% DC-Y3C14W0X	00:03:22:34:8A:CC	189.254.171.116	DirectIP 2.0	
04	% DC-T1842W0X	00:03:22:45:5D:8F	189.254.48.71	DirectIP 2.0	
05	% DC-D4537R0X-A	00:03:22:65:8B:68	189.254.188.108	DirectIP 2.0	
06	% NC-C820-IP	00:03:22:35:FF:2A	189.254.35.85	IDIS	
07					
08					
09					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					

Close



IDIS cameras can be detected automatically but IDIS protocol cannot be detected automatically. We recommend you use the DirectIP protocol to detect the cameras automatically. When you change the protocol, the camera reboots and then you can register the camera on the NVR. For more information on the settings, please refer to the network camera manual.

Camera List Area

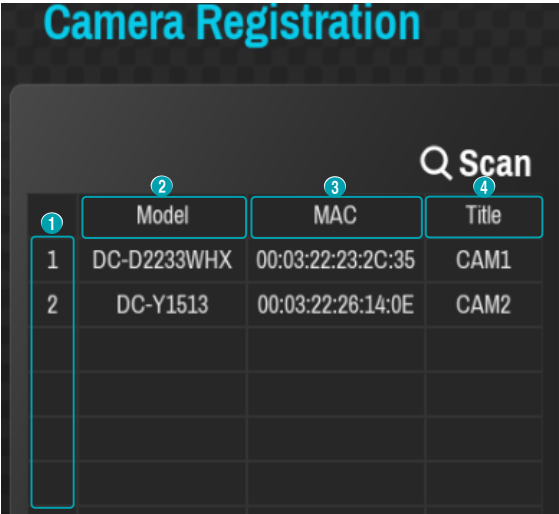

Registered	14	DC-D1011	00:03:22:13:57:FF	CAM14
	15	DC-D2233WHX	00:03:22:23:2C:3C	CAM15
Initial registration	16	DC-D1022VR/WVR	00:03:22:13:61:35	CAM16
		DC-T1233WHX	00:03:22:18:F5:A6	None
other NVRs (Registration X)		DC-D1022VW	00:03:22:13:60:F8	None
		DC-T1233WHR	00:03:22:1E:E9:86	None


- ① **Screen Position/Registration Status:** Identifies the camera's position in the video display area. A blue background indicates a camera that is available for registration. A gray background indicates an already registered camera. Other registered cameras are shown in black background.
- ② **Model:** Indicates the camera's model.
- ③ **MAC:** Displays the 12 digits of the camera's MAC address.
- ④ **Title:** Indicates the camera's name. Changing a camera's name in the video display area updates the camera list as well.

Following options can be accessed by right-clicking on a camera list entry:


- **Add/Remove Camera:** Adds or removes the selected camera. The Add Camera option is inactive if the camera has already been added to the screen.
- **Authentication:** Enter the necessary camera login info. This option is inactive for DirectIP / IDIS cameras because they do not require logins. This option is inactive for IDIS protocol only if the password is set.
- **Multi-Selection Mode On/Off:** Adds or removes cameras simultaneously by selecting multiple cameras from the list.

Video Display Area


Left-click on the video display area to toggle between split screen and single screen modes.
Drag the camera screens around to rearrange them.

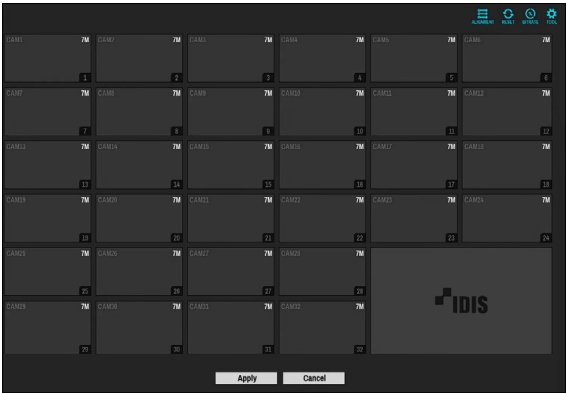

Camera Screen

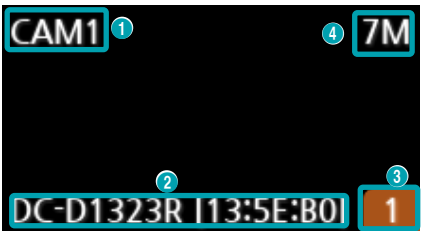

- ① **Camera Title**
Indicates the camera's title. Left-click on the title to edit the camera's title.

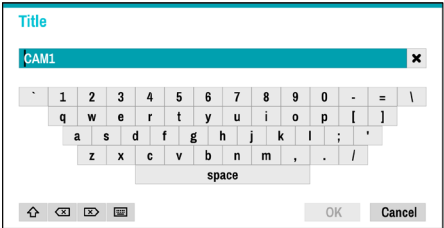


- ② **MAC Address**
Camera's model and MAC address are shown if the camera has not been registered to the NVR.
- ③ **Screen Position/Registration Info**
Flashes in orange if the camera has not been registered to the NVR.



- Information is not indicated on the bottom of the screen for cameras already registered to the NVR, and the **Screen Position/Registration Info** icon is shown with a black background.
- **Screen Position/Registration Info** icon for cameras registered to another NVR is shown with a steady orange background on top of a gray screen.


④ Bitrate Allocation

Indicates the performance (bitrate) allocated to the channel. Left-click on the upper right corner of the screen to change the bitrate.

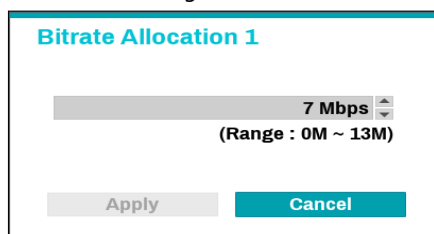

Camera Menu

Right-click on the video display area to bring up the camera menu.




- **Remove Camera:** Removes the registered camera.
- **Remove Device:** Removes the registered encoder.
- **Color Control:** Adjusts the camera's color settings.
- **Information:** Displays the camera's basic information.
- **Title:** Edits the camera's title.
- **Bitrates:** Changes the bitrate allocated to the channel.
- **Remove All Cameras:** Removes all registered cameras.



You can drag & drop to add or remove cameras.

Apply/Cancel Buttons

While in Camera Registration mode, select **Apply** to register all changes. When selecting **Apply**, the following message will be displayed. You can activate or deactivate Self-diagnosis.




Select **Cancel** to exit Camera Registration mode without applying the changes.




It is not possible to register a camera that has already been registered to a different NVR.

Diagnosis Process

When the camera is registered to the NVR, **Self-diagnosis** runs automatically for the new registered and changed cameras. If **Self-diagnosis** is processing, **Diagnosis Processing** message will be displayed.

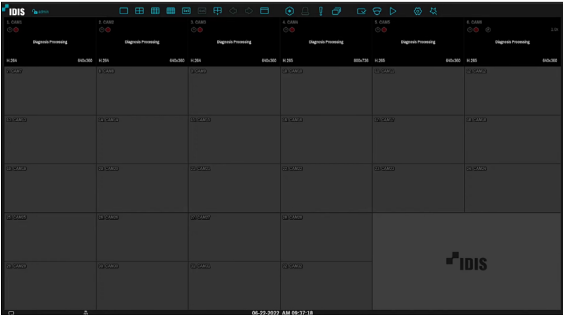


If **Self-diagnosis** is failed, **Diagnosis Required** message will be displayed. In this case, you can run **Self-diagnosis** manually.

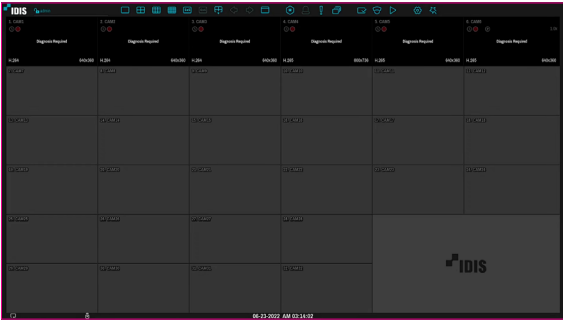

Camera Registration Mode


While in Live mode, right-click and select **Camera Registration**.

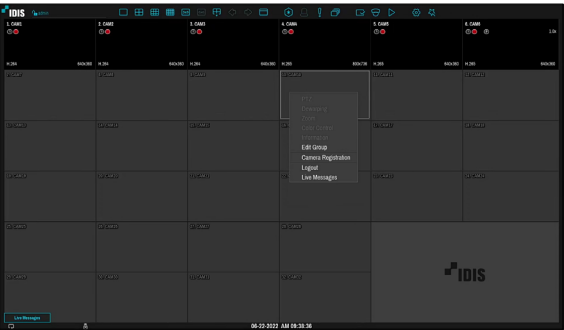

Login

Configuring the NVR's settings and accessing its searching and other functions require an authorized user login.

- 1 Bring up the Live menu and either press the **SETUP** button on the remote control or click on  icon using the mouse to log in.

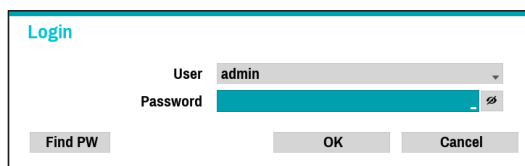


The Login screen displays the title "Login" in blue. It features a "User" dropdown menu with "admin" selected and a "Password" field with a masked password. To the right of the password field is a small icon of a crossed-out eye. At the bottom are three buttons: "Find PW", "OK", and "Cancel".

- 2 Select a user, enter the password, and then select **OK**.



- Leaving the admin account unassigned with a password poses a security risk. Please assign a password at your earliest convenience. A warning message will continue to be displayed until a password is assigned.
- Click the password field with the mouse to enter your password using the virtual keyboard. For more information on using the virtual keyboard, refer to the [Text Input via Virtual Keyboard on page 34](#).
- Click the  button to the right of the password field to show the password.

- 3 To log out, bring up the Live menu and click on  icon using the mouse.




The Logout confirmation screen displays a question mark icon and the text "Are you sure you want to log out?" followed by the username "admin". At the bottom are two buttons: "Log out" and "Cancel".

Find Password


If you do not know the password, select **FIND PW**. You can set a new password.

- 1 Enter a user, registered email and then select **Get Verification Code**.

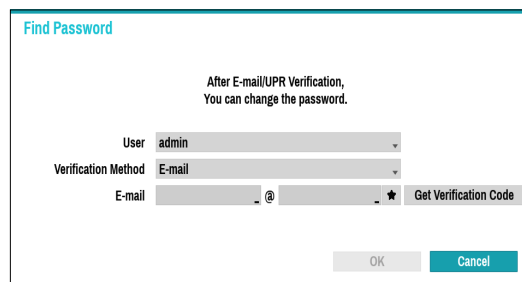

The Find Password screen displays the title "Find Password" in blue. It features a "User" dropdown menu with "admin" selected, a "Verification Method" dropdown menu with "E-mail" selected, and an "E-mail" field with a masked email address. To the right of the email field is a question mark icon and a "Get Verification Code" button. At the bottom are two buttons: "OK" and "Cancel".

- 2 Enter Verification Code and select **OK**.

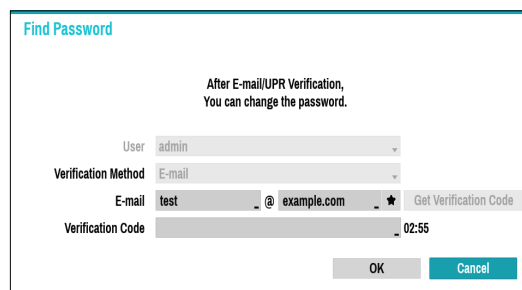


The Find Password screen displays the title "Find Password" in blue. It features a "User" dropdown menu with "admin" selected, a "Verification Method" dropdown menu with "E-mail" selected, and an "E-mail" field with "test" and "example.com" entered. To the right of the email field is a question mark icon and a "Get Verification Code" button. Below the email field is a "Verification Code" field with a masked code and a timer showing "02:55". At the bottom are two buttons: "OK" and "Cancel".



- Select the question mark button at the bottom left corner of the screen to refer to the password settings instructions.
- The password must be entered only with the virtual keyboard.
- FEN service must be enabled to use find password function. For more information on e-mail, refer to [Mail on page 106](#).

- 3 Enter an UPR(User Password Reset) verification and then click on **UPR Verification** button.

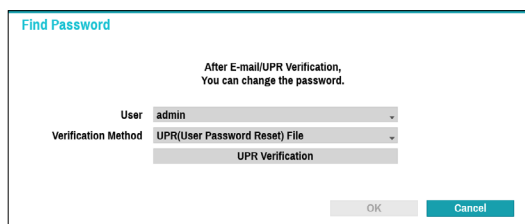

The 'Find Password' dialog box has a title bar 'Find Password'. Inside, it says 'After E-mail/UPR Verification, You can change the password.' There are two dropdown menus: 'User' with 'admin' selected and 'Verification Method' with 'UPR(User Password Reset) File' selected. Below these is a text input field containing 'UPR Verification'. At the bottom right are 'OK' and 'Cancel' buttons.

- 4 Select the UPR file and then click on **Import** button.




The 'Find Password - "UPR(User Password Reset) File"' dialog box has a title bar with the same name. It says 'File not found' in the center. Below is a 'File name' label and an empty text input field. At the bottom right are 'Import' and 'Cancel' buttons.



- To use UPR function, the UPR file must be saved in advance. For more information on saving the UPR file, refer to **User on page 37**.
- You can reset the password using an encrypted UPR (User Password Reset; filename extension *.upr) file.
- It can be used as USB flash driver on local pc, but not remotely.
- Only files exported from the same device are available.
- If you lose the UPR file and the password of the NVR account is changed, the UPR file may not be used.

- 5 To set a new password, click the question mark button in the lower left corner and follow the instructions.

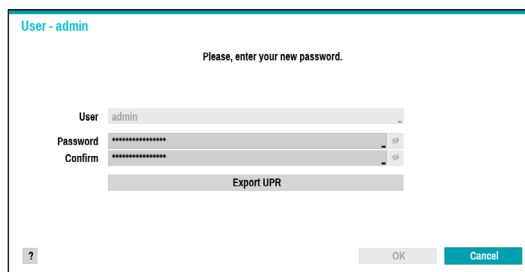


The 'User - admin' dialog box has a title bar 'User - admin'. It says 'Please, enter your new password.' There are three input fields: 'User' with 'admin', 'Password' with masked characters, and 'Confirm' with masked characters. Each has a small dropdown arrow to its right. Below these is an 'Export UPR' button. At the bottom left is a question mark icon in a box. At the bottom right are 'OK' and 'Cancel' buttons.

Live Mode

Live Menu

Press the **MENU** button on the remote control while in Live mode to bring up the Live menu on the top of the screen. Press **MENU** button once more to hide the menu. Use the Arrow buttons on the remote control to select the menu options.

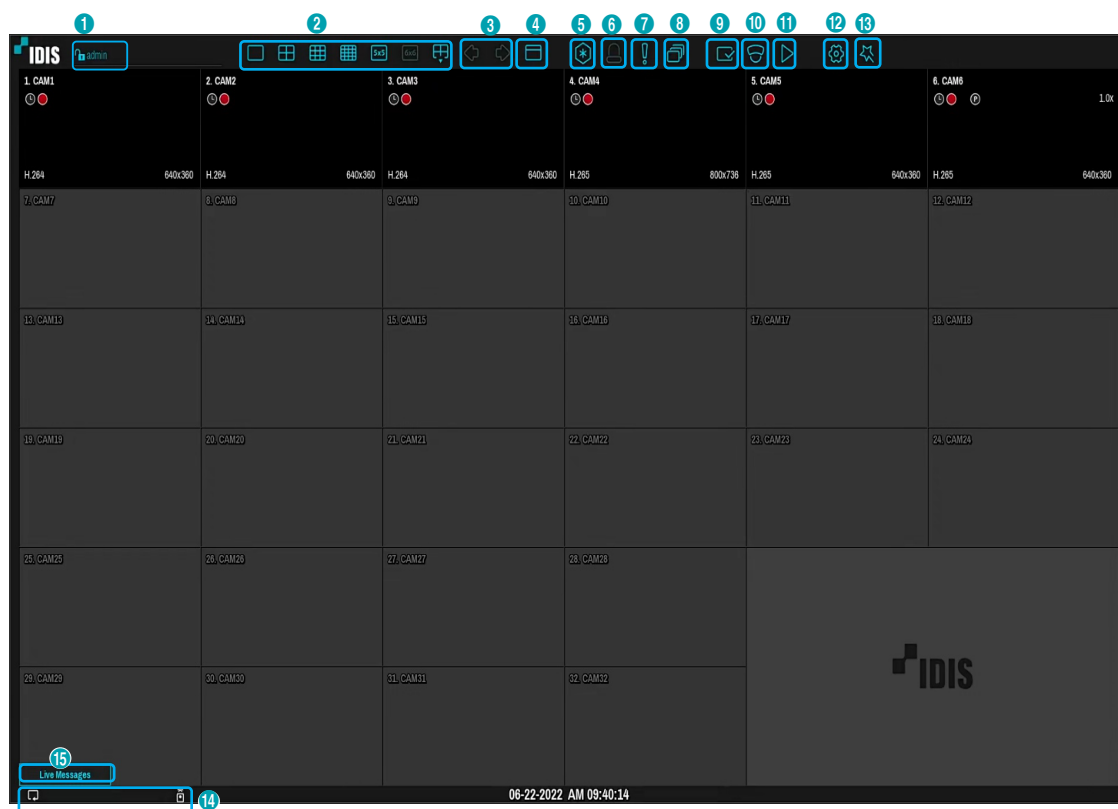

1	Login/Logout	2	Layout	3	Previous Group, Next Group	4	Display
5	Freeze	6	Alarm	7	Panic Recording	8	Sequence
9	Status	10	Select Camera	11	Search Mode	12	Setup
13	Wizard	14	Status Indication	15	Live Messages		



Placing the mouse pointer near the top portion of the screen also displays the Live menu.

① Login/Logout

Log into and out from accounts. If in the logged in state, the account ID is shown. If in the logged out state, the login icon is shown.

② Layout

Used to change the screen layout to single screen, 1x2, corridor format(1x3), 2x2,1+5, 1+7, 3x3, 1+12, 4x4, 5x5, or 6x6.



Corridor Format: Divides the screen into 3 panes. This format displays vertically and is set to display the optimized video of the camera when using the camera's pivot feature. This is particularly effective when monitoring hallways, passages, and other confined spaces.

③ Previous/Next Group

Loads the previous/next screen group.

④ Display

- **Full Screen On/Off:** Enables the full screen mode.
- **Camera OSD On/Off:** Enables/ disables the camera OSD feature.
- **Status OSD On/Off:** Enables/ disables the status OSD feature.
- **Aspect Ratio On/Off:** Setting On displays video on the camera screen in its original ratio.

⑤ Freeze

Freezes the screen. Select **Freeze** again to unfreeze.

⑥ Alarm

Pressing this button while the alarm has been activated resets all NVR outputs, including the built-in buzzer. When an event occurs, the button is enabled. Press the button to turn off the alarm and deactivate it.

⑦ Panic Recording

Activates/deactivates Panic Recording.


⑧ Sequence

Initiates **Sequence** in the same manner as pressing the **SEQUENCE** button while in Live mode. To exit, select **Sequence** once more or press the **SEQUENCE** button on the remote control. The  icon is displayed on the upper right part of the screen while Sequence is in progress.

Full Sequence

Displays all channels in sequence while in Live mode (single and split screen settings). In order to use the Full Sequence feature, **Full Sequence** (Display Setup - Main Monitor > Sequence) must first be enabled.

e.g.) Full Sequence in 2x2 split screen mode



Cameo Sequence

In **Cameo Sequence** mode, only the bottom right screen in a split screen setup changes sequence. In order to use the **Cameo Sequence** feature, **Cameo Sequence** (Display Setup - Main Monitor > Sequence) must first be enabled.

e.g.) Cameo Sequence in 2x2 split screen mode



- If using the **Full Sequence** setting, page numbers appear on the system status area on the upper right part of the screen, next to the Sequence icon.
- Pages are skipped under the following circumstances:
 - If all cameras included in the page are deactivated.
 - If there are no video signals.
 - If the page contains "covert" cameras.
 - If the user does not have permission to view feeds from the cameras.

⑨ Status

Displays the status window for NVR's system and device.

⑩ Select Camera

Displays the selected camera in a single screen format.

⑪ Search Mode

- **Time-Lapse Search:** Select **Search Mode > Time-Lapse Search** to search for and play back saved data directly from the record table.
- **Event Log Search:** Select **Search Mode > Event Log Search** to search for event logs and play back associated event recordings.
- **Thumbnail Search:** Select **Search Mode > Thumbnail Search** to search associated event recording in detail.

⑫ Setup

Used to access the Setup menu.

⑬ Wizard

Launches the Setup Wizard.

Running the Wizard lets you configure basic settings required for operating the system.

⑭ Status Indication


Displays system status icons.

Status Indication

	Indicates remote control receptivity.
	Indicates connection to the NVR from a remote program.
	Indicates two-way audio connection between NVR and PC.
	Indicates two-way audio connection between NVR and camera.
	Indicates two-way audio connection among NVR, PC and camera.
	Indicates connection to the NVR using the DirectNDC service.
	Indicates a zoomed in state.
	Indicates Freeze is in use.
	Indicates Sequence is in use.
1/4	Indicates the current screen's group.
	Indicates an event monitoring.
	Indicates dewarping is in use.
	Indicates HDD use. The icon to the left is shown if using the overwrite setting. Otherwise, remaining HDD space is shown as a percentage value.

⑮ Live Messages

Display a message to make it easier for users to recognize critical events and system information that happen in real time.

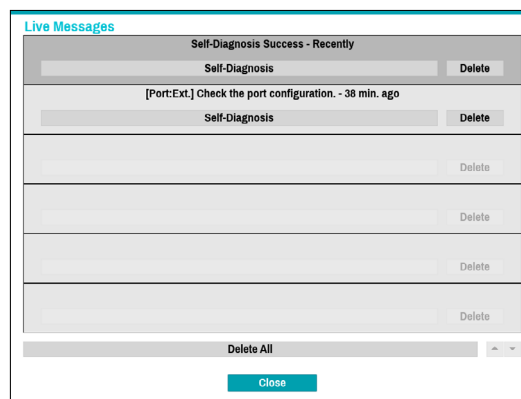


Zoom

Press the **ZOOM** button on the remote control or right-click on the mouse to select a channel you wish to zoom in on while in live mode or time-lapse mode. When a zoom frame appears on the selected channel, right-click on the mouse or press the **Enter** button to zoom in. Use the arrow buttons to position the frame. When Zoom is activated,  icon is on the status bar located on the upper right corner of the system.

-  In Full Screen mode, activating Zoom automatically selects the current channel.
- To restore the channel to normal size, press the Zoom button again.

PTZ Control

While in Live mode, right-click and select PTZ from the context menu or press the **PTZ** button on the NVR's front panel or remote control to display the PTZ camera selection window.

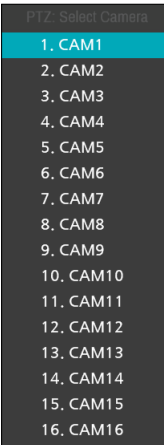

Select the camera you wish to control. The  icon will begin to flash on the selected camera's OSD window.

Use the **Arrow** buttons to pan and tilt the camera up, down, left, and right.

Use the  and  buttons to zoom in/out.

Use the  and  buttons to shift focus from nearby to far and vice versa.

Use the  button to load the preset window.

Use the  button to save current position as a preset.

You can also change the direction by dragging on the mouse.


Also, it's possible to use the mouse wheel to zoom in/out.




- Logging in with an account that has **PTZ Control Authority** is necessary in order to control PTZ cameras.
- A message will prompt if there is no PTZ camera displayed on the Live screen.
- Zoom in/out and shift focus using the **PTZ Control (ZOOM, FOCUS)** buttons on the remote control.
- To exit PTZ mode, press the **PTZ** button again.

Setting Up a PTZ Preset

While in PTZ mode, select the **VIEW** button on the remote control to display the **Set Preset** window and assign the current position as a preset.

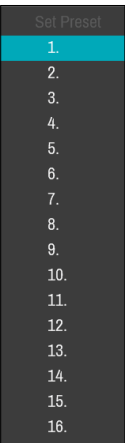


While in PTZ mode, select the **SAVE** button on the remote control to display the **Move to Preset** window. Select a preset to move the current PTZ camera to the selected preset's position.




Advanced Settings

In PTZ mode, selecting a camera and then clicking **Menu** button loads the Advanced PTZ screen as shown below. You can load the Advanced PTZ screen also by pressing the **Play/Pause** button and then **SETUP** button on the front panel. This menu lists **Speed**, **Auto Pan**, and other advanced PTZ camera control options available for the camera. Also selecting **Point Move** button moves PTZ camera to the point that the user clicks. Options that are not available for the selected PTZ camera remain inactive.

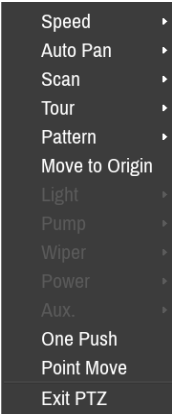

- ☒ You can use the mouse to control PTZ cameras. Left-click on the mouse and drag to move the camera in the desired direction and use the mouse wheel to zoom in/out.

While in PTZ mode, place the mouse pointer close to the bottom edge of the screen to display the PTZ Tools window.

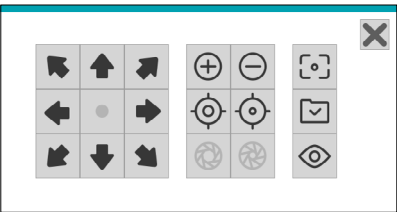


	PTZ Camera Pan and Tilt
	Zoom In/Out
	Focus Near / Far
	IRIS Open / Close
	One Push
	Set / Move to Preset
	Device Menu supported by the camera

- ☒ The exact PTZ protocol supported by the camera must be specified in order to use the NVR's PTZ controls.
- Drag and drop to reposition the PTZ Tools window.
- Select the icon to hide the PTZ Tools window.

Dewarping Control (NVR)

Use this feature to dewarp the fisheye image on NVR. image. While in live mode and search mode, right-click on the mouse to select Dewarping from the context menu. The screen is changed to the Dewarping mode.



- **Mount Type:** Choose a position that the camera is mounted. The available Screen Type changes depending on this setting.
- **Aspect Ratio:** Select the proper image aspect ratio.
- **View Mode:** Select the layout, Main View, Main +1,3,5 panes mode and panoramic mode.
- **Auto Pan:** Set to pan the camera automatically. +, - for direction and numbers for speed
- **ePTZ:** Control Pan, Tilt, and Zoom function. Dragging the mouse, the size of dragging indicates the speed of PTZ.
 - **Left button drag:** Left/Right (Pan control), Up/Down (Tilt control)
 - **Right button drag:** Zoom control
- **Show Main PIP:** Shows PIP (Picture in Picture) view to select the area easily in the main view screen.
- **Audio:** Enable/disable audio. Audio playback of the selected camera is available in full screen mode only.

Dewarping Control (Camera)

While in Live mode, right-click on the mouse to select Dewarping(camera) from the context menu. The  icon will begin to flash on the selected camera's OSD window. You can change the direction by dragging on the mouse. In order to select the type and mode of View Mode, **Video** (Camera - Advanced Setup) must first be enabled.



- This feature is supported only with Fisheye camera connected on the DirectIP protocol.
- Original mode does not support dewarping control feature.
- Configuring this feature requires an authorized user login.

Event Monitoring

When an event occurs, the NVR automatically changes to the camera screen linking event monitoring and shows the  icon on the system status area on the upper right portion of the screen. To use the Event Monitoring feature, navigate to **Display Setup > Main Monitor** and enable **Event Monitoring**. Event Monitoring remains in effect throughout the entire **Linked Time**. After that, the NVR will return to the previous screen if a new event does not take place. Pressing the **Layout** or a **Camera** button before the end of the **Linked Time** reverts the system to Live mode.

Covert Camera

Use this feature to assign **Covert Camera View** permissions.

Navigate to **Camera Setup > General** and designate cameras as **Covert 1** or **Covert 2**.

- **Covert 1:** Hides images from the camera in Live mode but does indicate the camera's title and status via icons.
- **Covert 2:** The camera is indicated as being inactive. Images from the camera are not shown. Camera title and status icons are not shown.



Users that have a cover **Covert Camera View** are able to view both images from and status icons for all **Covert 1** and **Covert 2** cameras.

Context Menu Access

While in Live mode, press the remote control's  button and then the Menu button to display the Context Menu window. You can display the ContextMenu window also by pressing the **Play/Pause** button and then **SETUP** button on the front panel. Alternatively, right-click on the mouse to access the Context menu.

- **PTZ:** Access PTZ controls.
- **Dewarping (camera):** Dewarps the fisheye camera image.
- **Zoom:** Zoom in.
- **Audio:** Enable/disable audio. (This function supports only in single screen.)
- **Dewarping:** Dewarp fisheye camera images through NVR (Only some device types are supported).
- **Mic:** Enables audio transmission to a remote locale via microphone (This function only supports cameras with two-way audio).
- **Color Control:** Select a channel to display its Color Control window. Adjust the selected camera's brightness, contrast, saturation, and hue settings.
- **Self-Adjusting Video Mode :** Select the image preset (Natural, Vivid, Noise Reduction) and you can control it directly.



Even if two-way audio communication is set up between the NVR and camera, the microphone connected to the NVR will terminate automatically when the microphone on the remote is turned on (The remote microphone takes priority).

- **Information:** Select a network channel to display information about the selected channel's device.
- **Edit Group:** Rearrange the split screen layout.
- **Camera Registration:** Activate Camera Registration mode.
- **Login/Logout:** Log into the account or log out of the account.
- **Live Messages:** Receive the message in real time.

Edit Group

Edit Group lets you customize split screen pages in both Live and Search modes.

- 1 While displaying a split screen page, select the **Edit Group** option from the context menu. A yellow border is drawn around the page. Use the arrow buttons on the remote control or the mouse to select a different page.
- 2 Press a **Camera** button or select a camera after pressing the **Menu** button. Selected camera is then loaded on to the selected page. Repeat to assign other channels to the page.
- 3 Press the remote control's  button to exit Edit Group. Alternatively, press the **Menu** button and then select **Exit Group Edit** to exit.



Edit Group will terminate automatically after 15 seconds of inactivity.

Video Recording

Video recording will only take place if all the connections are made correctly as per information contained in Part 2 of this operation manual.

For more information on video recording settings, refer to the **Record Setup on page 58**.

Panic Recording

Select **Live** or **Search** menu's Panic Recording  icon or press the **Panic Recording** button on the front panel or the remote control to commence panic recording on all registered cameras.

To stop Panic Recording, select the Panic Recording  icon or press the **Panic Recording** button again. If the **Panic Recording Duration** option under **Record Setup > General** has been configured, Panic Recording will automatically terminate after the specified duration of time has elapsed. For more information, refer to the **Record Setup on page 58**.



- Panic Recording takes place irrespective of any recording schedule set up by the user.
- Panic Recording video profile from **Record Setup – General** applies to all Panic Recording videos.



Panic Recording will not take place if recording mode is not set to **Recycle** and the HDD has reached 100% of its capacity.

Audio Recording

If the Record Audio option under **Record Setup** > **General** has been enabled the camera will record audio along with video. For more information, refer to the **Stream II on page 55, Record Setup on page 58.**



Check your local laws and regulations on making audio recordings.

Video Recording Playback

You can play back video recordings by using mouse or remote control.



- Login with an account that has search permission is needed to playback video recordings.
- The initial video playback point in Search mode is the recording's last playback point or the end of the recording data.
- Audio playback of the selected recording is available in full screen mode only.
- Covert protection on cameras also applies to video recording playback.

All Channel Playback

- 1 Press the **Menu** button while in Live mode.
- 2 Select the Search Mode ► icon and then select **Time-Lapse Search** or **Event Log Search**.
- 3 The selected search mode will be initiated.

For more information on data search, refer to the **Part 3 - Search on page 116.**

Remote Control Buttons during Playback

- 1 **Camera Button:** Displays the selected recording in full screen.
- 2 **Zoom Button:** Allows you to zoom in on a specific area of the recording.
- 3 **Layout Button:** Cycle through 1x1, 1x2, corridor format(1x3), 2x2, 1p5, 1p7, 3x3, 1p12, 4x4, 5x5, and 6x6 modes.

Context Menu

While in Search mode, press the remote control's  button and then the **Menu** button to display the Context Menu window. Alternatively, right-click on the mouse to access the Context Menu.

- **Zoom:** Zoom in.
- **Audio:** Enable/disable audio. (This function supports only in single screen.)
- **Dewarping:** Dewarp fisheye camera images through NVR (Only some device types are supported).
- **Edit Group:** Rearrange the split screen layout.
- **Live Messages:** Receive the message in real time.

Part 2 - Configuration

Menu Use

Information contained in this section (Menu Use) applies to all other instructions found throughout Part 2 - Configuration.


Menu Icon

	Use the virtual keyboard to enter text.
	Type the text.
	Open a drop-down menu.
	Delete the item.
	Change the order of table entries.
	Change the range of values.
	Add new items or works.
	Indicate that there are predefined items for convenience.
	Display the submenu or pop-up window. (except for information, error and alert windows)

Login with an ID that has permission to access the setup menu is needed to access and make changes to the Setup menu.

- ☒ When using Use 2FA feature, registered mobile device must be authenticated before entering the setup menu. For more information on 2FA function, refer to **Use 2FA on page 39.**

- 1 While in Live mode, press the remote control's **SETUP** button or select Live menu > Setup using the mouse.

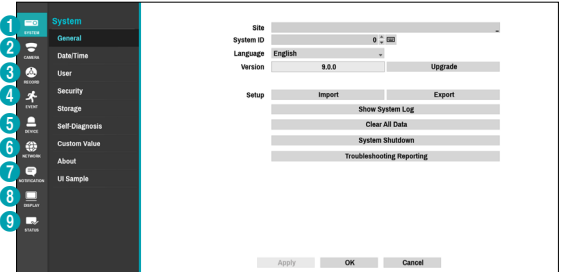

1	System Setup
2	Camera Setup
3	Record Setup
4	Event Setup
5	Device Setup
6	Network Setup
7	Notification Setup
8	Display Setup
9	Status Setup


- 2 Use the remote control's arrow buttons to select an option and then press the remote control's  button or left-click on the option using the mouse.

- 3 Change the setting and then select **Apply** or **OK** to save the change.

- ☒ To apply default settings, select the Default button located on the left bottom corner of the setup window.

Text Input via Virtual Keyboard

Use the remote control's arrow buttons to select a virtual keyboard key and then press the remote control's  button or click on the key using the mouse.

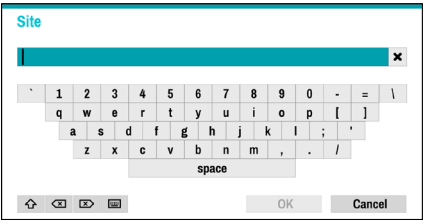

	Toggle case.
	Deletes the character to the left of the cursor.
	Deletes the character to the right of the cursor.
	Converts keyboard.

Batch Assignment

Certain table-format menus such as the shown in the **Camera Setup on page 44** allow you to change the title value. In this case, changing the title value simultaneously changes all other entry values on the same row.

Mouse

Using a mouse makes it easier to configure the settings. A mouse lets you make selections faster and use its wheel to scroll through long menus. You can also use the mouse wheel to increase/decrease numerical values.

System Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

General

This Setup menu contains general system options.

- **Site:** Used to enter a description about the system's installation site (no description by default). You can edit the information using the virtual keyboard.
- **System ID:** Used to identify the NVR apart from other NVRs. System ID is also used to control the NVR with the remote control.

☒ The default System ID is 0 and can be changed to a value between 0 and 99. The System ID can also be entered using the virtual keyboard.

- **Language:** Choose a language.
- **Version:** Indicates the software version.
- **Upgrade:** Upgrade the system. If NetFS feature is in use, click Upgrade. You can select the **USB Port** or **NetFS**. If the NetFS feature is not in use, you can only select the USB port. Selecting the USB port displays the USB search window. You will then be able to select an upgrade package and upgrade the system. Selecting NetFS displays the list of registered FTP sites. Once the upgrade is completed, the NVR will reboot automatically.

☒ When using Use 2FA feature, registered mobile device must be authenticated to upgrade the system. For more information on 2FA function, refer to **Use 2FA on page 39**.

- **Setup:** Exports current NVR settings or imports existing settings. If the NetFS feature is in use, you can export or import NVR settings in the registered FTP site.
- **Import:** Decide whether to import network settings as well. If you do not wish to change the current network settings, do not select **Include Network Setup**.

☒ Selecting **Setup Import** does not change the settings below.

- Time-related settings (Date/Time, Time Zone, and Use Daylight Saving Time)
- Camera-related **Advanced Settings** settings
- Camera-related **Stream** settings (Only if the resolution is different from the camera in exporting)

If users and groups are deleted, existing user settings are retained.

- **Export:** Exports the current system settings to a storage device connected to the system's USB port or the registered FTP site in NetFS. You can designate a **File Name** for the export file.

 For USB flash memory devices, the NVR supports the FAT32 file format only.

- **Show System Log:** Displays a searchable list of 50,000 most recent system log entries. For more information on types of system log entries, refer to the **System Log Types in the installation manual**. The  icon appears next to log entries originating from a remote source. To export the system log, select the **Export** at the bottom of the screen and then designate a file name.



✓ In order to display the system_log.txt file, you must use the correct character encoding settings and use a fixed-width font.


- **Clear All Data:** Erases all recording data. Selecting **Clear All Data** displays a confirmation window. Select **Clear** to proceed.

✓


- Before you perform **Clear All Data**, make sure you are not accidentally deleting important data. Erased data cannot be recovered.
- **Clear All Data** does not affect the system log. Instead, the **Clear All Data** event will be added to the log.

- **System Shutdown:** Shuts down the system. When prompted, select **System Shutdown**.

- **Troubleshooting Reporting:** When there is a problem with NVR system, generate reports for troubleshooting.

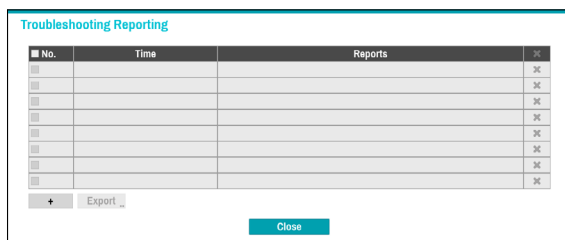


Date/Time

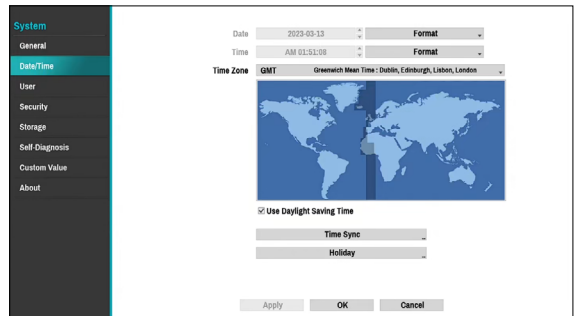

- **Date:** Used to change the system's date setting.
- **Time:** Used to change the system's time setting.
- **Date Format/Time Format:** Used to change the system's date and time formats.
- **Time Zone:** Used to designate the system's time zone.

✓ Refer to the map displayed on the screen and change the time zone using the mouse or the arrow buttons.

- **Use Daylight Saving Time:** Enables DST correction.
- **Time Sync.:** Select a time server for the system to synchronize with.

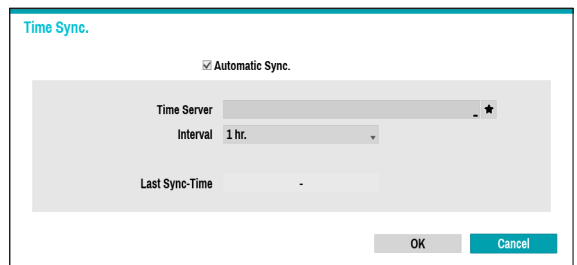

- 1 Select **Automatic Sync.**
- 2 Enter the **Time Server's** IP address or domain name or select and then choose a server from the list of registered time servers.
- 3 Specify the server synchronization **Interval**.
- 4 Select **OK** to apply and exit.

✓

- If you have configured the DNS Server setting under **Network - WAN**, you can enter the time server's domain name instead of its IP address.

- **Holiday:** Designate holidays. On specified holidays, recording takes place according to the holiday recording schedule specified under Record Schedule.

- 1 Select the **+** button at the bottom of the window.
- 2 Select a date.
- 3 Select **OK** to apply and exit.

No.	Date	
		X
		X
		X
		X
		X

+

OK Cancel



Select the icon to delete the existing holiday date.

User

Use this option to register users and assign permissions.

Group D User	
Administrator	X
admin	X
	X
	X
	X
	X
	X
	X
	X

+ Group + User

Auto Login Never
Auto Logout Never

Apply OK Cancel

- 1 Select **+ Group** and enter a group name. A group name can be up to 15 characters in length.
- 2 Specify the group's permission settings. For more information on permission settings, refer to the **Group Permissions on page 38**.

New Group

Group

Authority

- ☒ Authority (All)
- ☒ Shutdown
- ☒ Upgrade
- ☒ Color Control
- ☒ System Check
- ☒ PTZ (Dewarping) Control
- ☒ Alarm-Out Control
- ☒ Covert Camera View

Remote Connection Policy

Camera is Hidden Not Using

Schedule Off

Auto Expiration 60 minutes

Waiting Period 20 minutes

OK Cancel

- 3 Select **+ User** and then enter a user name.

New User

E-mail, UPR File are required to find the Password.

User

Group Administrator

Password

Confirm

E-mail

Verification Not Use

Export UPR

RTSP/HTTP


Use RTSP/HTTP

Password

OK Cancel

4 Select a group for the user and then enter a password. The password can be up to 16 characters in length and may include letters, symbols, and numbers. The e-mail address will be used as information on password verification.

5 Select the Export button to create the UPR(User Password Reset) file. The UPR file can be used to finding a password offline. Select the location to save the UPR file and enter the file name.

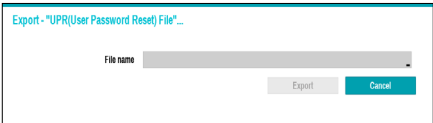

6 If you wish to use RTSP connection and HTTP API function, set the password. For security, it is recommended that you set a different password for RTSP, HTTP and User. For more information on RTSP, refer to **RTSP on page 102**.

7 Select **OK**.

8 Configure **Auto Login** and **Auto Logout** settings.

9 Select **Apply** or **OK** to exit.



- Group names, user names, passwords and email can be entered using the virtual keyboard. For more information on using the virtual keyboard, refer to the **Text Input via Virtual Keyboard on page 34**
- To delete a registered user or group, select the  icon on the right of the corresponding user/group. **Group Administrator** and User admin cannot be deleted.
- Select the  icon next to Group & User on the top of the screen to delete all groups and users except **Group Administrator** and **User admin** simultaneously.
- A password entry is required to edit existing groups and users.
- Group Administrator**'s permissions cannot be changed.
- With the **User admin** account, only the password can be changed.
- When the system starts up, it will automatically log into the account designated under **Auto Login**.
- The system will automatically log out of the account if the duration of inactivity specified under **Auto Logout**.

Group Permissions

Shutdown		May shutdown the system from the system menu.
Upgrade		May upgrade the system from the system menu (System Setup).
Color Control		May adjust each camera's brightness, contrast, saturation, and hue settings.
System Check		May view System Check results.
PTZ(Dewarping) Control		May control PTZ and Dewarping cameras.
Alarm-Out Control		May reset in the event of an alarm-out. Alarm-outs can be reset by pressing the Alarm button on the device or selecting the Alarm-Out Control button on the remote program.
Covert Camera View		May access covert cameras in Live and Search modes.
Audio 		May use the camera audio on remote program and locals (NVR).
Factory Reset (NVR)		May reset the NVR to all its initial factory settings.
Search	Clip Copy	The user who has permission for Clip Copy can perform Clip Copy. If the user does not have permission, Clip Copy is not allowed but only search is allowed.

Setup	Camera Setup	May configure camera settings.
	System Time Change	May change the system's date and time settings.
	Data Clear / Protection	May clear data stored in the system or protect data from being deleted.
	PTZ Setup	May configure PTZ settings.
	Alarm-Out Setup	May configure alarm-out settings.
	Covert Camera Setup	May configure covert camera settings.
	VA Box Setup	May configure VA box settings.
	Record Setup	May configure recording settings.
	DirectNDC Setup	May access the NVR and control it remotely via network.
	EventUpload	- May upload the video clips when an event occurs. - May configure FTP settings.
	Self-Diagnosis	May configure the NVR self-diagnostic settings.
	Setup Import	May import previously saved NVR settings.
	Setup Export	May export current NVR settings.

Security

Use this option to configure security settings.

Use 2FA

Two-factor authentication (2FA) is a method of confirming a user's claimed identity by utilizing a combination of two different components.

In other words, it is a method of authenticating the registered mobile devices such as mobile phones and smartphones on NVR for security when proceeding settings, search and upgrade.

When you click **Use 2FA** and **2FA Setup** buttons, the following window will appear (**Registered** means the time when the mobile device was registered).

If you click the + button at the bottom of the table, the following message will appear and you can register the 2FA device.

Part 2 - Configuration

- ☒
- 2FA device registration is supported only via IDIS Mobile app.
 - Only the administrator account user can configure this option.
 - The maximum number of device that can be registered is 16.

When the mobile device registration is complete, the following message will appear. Click **Disable 2FA** at the bottom left corner of the screen to deactivate 2FA function via the email of an administrator user account.

2FA

User Name

admin

Status

You can verify device by using IDIS Mobile.
Please wait while verifying device.

Disable 2FA

Cancel

To use email authentication, the FEN setup must be configured. To use UPR function, the UPR file must be saved in advance.

Disable 2FA

How to disable the 2FA feature(s) :

(Online) Use E-mail verification

(Offline) Use UPR verification

User

admin

Verification Method

UPR(User Password Reset) File

UPR Verification

?

OK

Cancel

- ☒
- For more information on saving the UPR file, refer to **User on page 37.**

Network Security (Host Certificates)

This is the certificate management menu for network security access. It supports checking the product certificate information, creating the new certificate, exporting and importing certificates.

Host Certificates

Root CA

Certificate

Date

Version: 3 (Root)

Serial Number

177013613312323011

Signature Algorithm

sha256WithRSAEncryption

Issuer

C=KR, O=IDIS Global, CN=IDIS NVR Self Signed Root CA, OU=IDIS

Validity

Not Before

Oct 28 04:23:22 2019 GMT

Not After

Oct 23 04:23:22 2019 GMT

Generate

Import

Export

Host CA

Certificate

Date

Version: 3 (Root)

Serial Number

11144111612019

Signature Algorithm

sha256WithRSAEncryption

Issuer

C=KR, O=IDIS Global, CN=IDIS NVR Self Signed Root CA, OU=IDIS

Validity

Not Before

Oct 28 04:23:24 2019 GMT

Not After

Oct 23 04:23:24 2019 GMT

Generate

Import

Export


OK

Cancel

40

Storage

Use this option to configure storage settings.

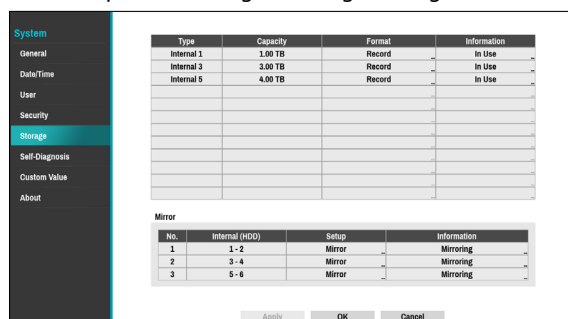

- **Type:** Indicates the type of the installed disk.
- **Capacity:** Indicates the disk's capacity.
- **Format:** If the disk has been formatted, indicates either **Record** or **Not Using**. If you have connected an unformatted storage device, the Use As value will be indicated as **Not Formatted**.
- **Information:** Indicates if the disk is being used for recording purposes. Disks that were used in different systems will show up as **Other**. Select **Information** to check the saved data's time information or select **Delete** to erase the data.



- Select **Format** to prepare the disk as a storage for data recording.
- Disks formatted with Use As set to **Not Using** will not be used for data recording.
- This NVR supports SATA3 HDDs.

Mirror

The NVR supports function that records the same data on the two disks at the same time. You can set up mirroring by selecting **Storage** in the System menu and then selecting **Setup** in the Mirror. Up to three Mirrors are supported.



This function only works if the two internal hard disks have the same capacity and model.




- If you change the setup related to Mirror, you must reboot the system.
- A disk problem may cause mirroring to stop. The separated disk can be used to reboot the system.

- **Internal HDD:** Indicates the available disks for mirroring.


- **Setup:** Configure detailed settings related to Mirror.

- **Mirror:** Click **OK** to start mirroring. Once you start mirroring (writing data on the two disks at the same time between two disks), all existing data on the two disks will be erased.

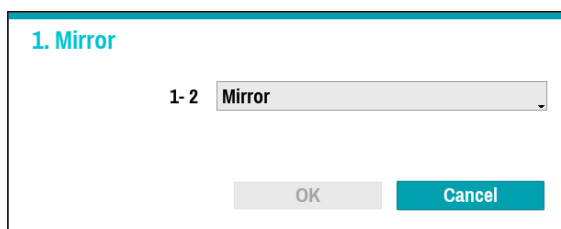

Once you start mirroring, all existing data on the two disks will be erased. Please be careful not to designate the wrong disk by mistake.

- **Stop:** Once mirroring starts, you can stop it by selecting **Stop** option and then designating disks to delete.

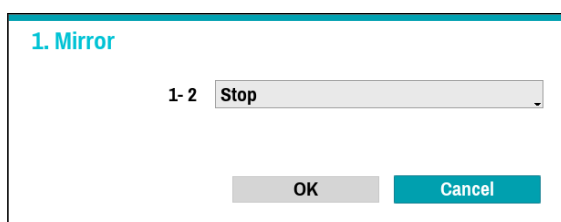

Mirror number 1 and 2 cannot resynchronize at the same time.

- **Information:** Indicates if the installed disk is being used for **mirroring** or **Resync** purposes. Select information about mirroring to check the disk's model and serial number.

Mirror Configuration Error


- **RAID Broken :** When some of the HDDs that make up mirroring are in error and then the defective HDDs are replaced, the data cannot be recovered.
- **Degrade :** If the defective HDDs are replaced, the data can be recovered by rebuilding the system. However, performance may be degraded in this case.

Self-Diagnosis

Use this option to configure self-diagnostic settings.




This feature is also supported when connected to the NVR from a remote program.

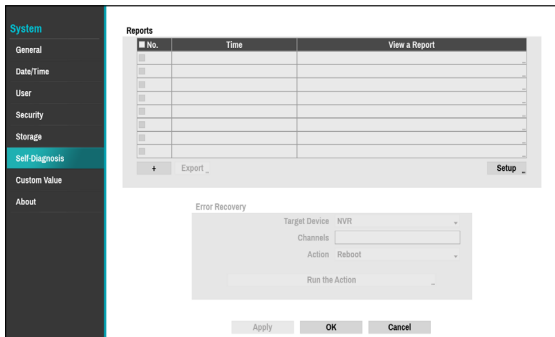

• Reports

- **No.:** Selects which reports to export.
- **Time:** Displays when you started the self-diagnosis.
- **View a Report:** Briefly displays whether the report is “Good” or “Bad”.
- **+**: Click the + icon at the bottom left corner of the screen to run the self-diagnosis.
- **Export:** Saves the reports to a storage device, such as the USB port and NetFS site, by converting them to HTML format. You can export more than one report at a time by selecting multiple reports.

- **Setup:** Set Auto Generating Interval and Check IP Duplicate.

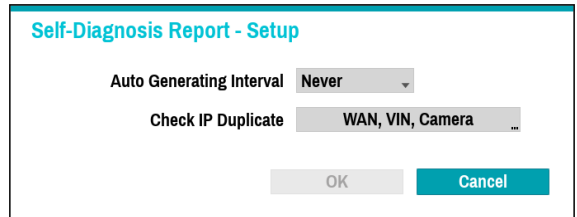

- **Auto Generating Interval:** Set the interval to automatically generate self-diagnosis report.
- **Check IP Duplicate:** Check if there are IP address conflicts of WAN, VIN, camera.



- These settings can be periodically checked for IP duplication, but Camera IP duplication checks have a long verification cycle, so you can run a self-diagnosis to check the results immediately .
- Check IP duplicate function can only be checked on the VIN network.




- The reports are stored in up to 24 files. If you have configured **Auto Generating Interval** as one-day period, only the reports from the last 24 days can be viewed.
- If the NVR is turned off, the reports will automatically turn off.
- The reports are organized by recent date and time.

- **Error Recovery:** When a problem is detected on the target device, click the **Run the Action button** to resolve the problem.

- **Target Device.:** Selects which device to run Error Recovery.
- **Channels:** Select the camera channel if a camera is set to the target device.
- **Action:** Select the type of action to run the Error Recovery.
- **Run the Action:** Click the **Run the Action** button when a fail is detected on the target device to resolve the problem.



- Once **Run the Action** function have made to the camera, the camera will reboot automatically.

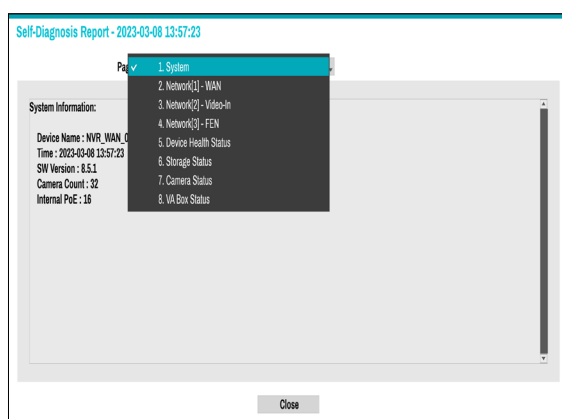

Once you have run Error Recovery on the camera, the camera will reboot automatically. By selecting **System**, **Network**, **Device Health Status**, **Storage Status**, **Camera Status** or **VA Box Status**, you can see the brief results of the self-diagnosis for the target device.



The NVR **self-diagnostic report** can only be viewed in text form.

This feature is also supported when connected to the NVR from a remote program.

We recommend clicking the **Export** button at the bottom of the list, which allows you to view the reports on a PC web browser. We also recommend scanning the self-diagnostic report on a remote program, which allows you to view the reports in HTML format as shown below.

System Information:

- Device Name : NVR_WAN_00032249F115
- Time : 2023-03-08 13:57:23
- SW Version : 8.5.1 (DGA-HL48521C (Mar 8 2023))
- Camera Count : 32
- Internal PoE : 16

Device Health Status:

No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Camera Signal	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Recording full	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
VA Box Signal	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Recording Status	Good																															
Recorded Video	2023-03-08 13:41:01 - 2023-03-08 13:41:06																															
Record > Recycle	On																															
Record > Schedule	On																															
HDD#	Internal 1 : In Use								Internal 2 : In Use								Internal 3 : In Use															
Disk Bad	Good (0 %)								Good (0 %)								Good (0 %)															
Mirror	-								-								-															
Mirror Status	-								-								-															
HDD Temperature	Good (48.0°C)								Good (41.0°C)								Good (49.0°C)															
S.M.A.R.T.	Good								Good								Good															
Fan Status	Good (0)																Good (1)															

S.M.A.R.T Attributes #0						
id	flags	current	worst	raw	threshold	name
1	11	100	100	0,0,0,0,0,0	50	Raw_Read_Error_Rate
2	5	100	100	0,0,0,0,0,0	50	Throughput_Performance
3	39	100	100	74,4,0,0,0,0	1	Spin_Up_Time
4	50	100	100	1,3,0,0,0,0	0	Start_Stop_Count
5	51	100	100	0,0,0,0,0,0	50	Reallocated_Sector_Ct
7	11	100	100	0,0,0,0,0,0	50	Seek_Error_Rate
8	5	100	100	0,0,0,0,0,0	50	Seek_Time_Performance
9	50	86	86	228,22,0,0,0,0	0	Power_On_Hours
10	51	115	100	0,0,0,0,0,0	30	Spin_Retry_Count
12	50	100	100	51,2,0,0,0,0	0	Power_Cycle_Count
191	50	100	100	2,0,0,0,0,0	0	G-Sense_Error_Rate
192	50	99	99	2,2,0,0,0,0	0	Power-Off_Retract_Count
193	50	100	100	224,6,0,0,0,0	0	Load_Cycle_Count
194	34	100	100	45,0,19,0,65,0	0	Temperature_Celsius
196	50	100	100	0,0,0,0,0,0	0	Reallocated_Event_Count
197	50	100	100	0,0,0,0,0,0	0	Current_Pending_Sector
198	48	100	100	0,0,0,0,0,0	0	Offline_Uncorrectable
199	50	200	200	0,0,0,0,0,0	0	UDMA_CRC_Error_Count
220	2	100	100	0,0,0,0,0,0	0	Disk_Shift
222	50	87	87	89,20,0,0,0,0	0	Loaded_Hours
223	50	100	100	0,0,0,0,0,0	0	Load_Retry_Count
224	34	100	100	0,0,0,0,0,0	0	Load_Friction

Clicking on the S.M.A.R.T status (e.g., 'Good') allows you to view detailed S.M.A.R.T attribute information.

Custom Value

System

General

Date/Time

User

Security

Storage

Self-Diagnosis

Custom Value

About

No.	Name	Value	↕
001			↕
002			↕
003			↕
004			↕
005			↕
006			↕
007			↕
008			↕
009			↕
010			↕
011			↕
012			↕
013			↕
014			↕
015			↕
016			↕
017			↕
018			↕
019			↕
020			↕
021			↕
022			↕
023			↕
024			↕
025			↕
026			↕
027			↕
028			↕
029			↕
030			↕
031			↕
032			↕
033			↕
034			↕
035			↕
036			↕
037			↕
038			↕
039			↕
040			↕
041			↕
042			↕
043			↕
044			↕
045			↕
046			↕
047			↕
048			↕
049			↕
050			↕
051			↕
052			↕
053			↕
054			↕
055			↕
056			↕
057			↕
058			↕
059			↕
060			↕
061			↕
062			↕
063			↕
064			↕
065			↕
066			↕
067			↕
068			↕
069			↕
070			↕
071			↕
072			↕
073			↕
074			↕
075			↕
076			↕
077			↕
078			↕
079			↕
080			↕
081			↕
082			↕
083			↕
084			↕
085			↕
086			↕
087			↕
088			↕
089			↕
090			↕
091			↕
092			↕
093			↕
094			↕
095			↕
096			↕
097			↕
098			↕
099			↕
100			↕

Apply

OK

Cancel

- **Name:** Set the name of system properties to be included in a JSON file on HTTP notifications.
- **Value:** Set the value of system properties to be included in a JSON file on HTTP notifications.

About

- **User Agreement:** User agreement for the use of the **FEN** service. If you agree, we collect device information such as IP address, port and router information to the **FEN** server.

Camera Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

Registration

You can register cameras at remote locales. By selecting a number from the list, you can move the camera up or down the list using the mouse wheel to reorder its position. The remaining cameras will move down the list automatically.

No.	Title	MAC Address	Address	Model	Status
1	CAM1	00:03:23:3A:F8:A2	189.254.127.239	DC-E4213WRX	7M
2	CAM2	00:03:22:39:3A:2E	189.254.88.182	NO-04213WRX	7M
3	CAM3	00:03:22:3F:2F:3F	189.254.180.53	MNC8298R	7M
4	CAM4	00:03:22:38:F8:32	189.254.151.124	DC-E4213WRX	7M
5	CAM5	00:03:22:30:F1:3E	189.254.156.163	DC-D324R	7M
6	CAM6	00:03:22:3F:2D:3A	189.254.245.8	UNKNOWN	7M
7	CAM7	00:03:22:38:3E:32	189.254.172.159	DC-D124R	7M
8	CAM8	00:03:22:38:F8:40	189.254.173.173	DC-E4213WRX	7M
9	CAM9				7M
10	CAM10				7M
11	CAM11				7M
12	CAM12				7M
13	CAM13				7M
14	CAM14				7M
15	CAM15				7M
16	CAM16				7M

- **Title:** Edit the camera's name.
- **MAC Address:** Displays the camera's MAC address registered to the NVR.
- **Address:** Displays the camera's IP address registered to the NVR.
- **Model:** Indicates the camera's model.
- **Bitrate:** Changes the bitrate allocated to the channel.
- **Scan:** Select to scan and register the device connected to the NVR.



This feature is supported only when connected to the NVR from a remote program.

Device Scan

Scan the device under **Registration - Scan**.

No.	MAC Address	Address	Model	Protocol	Name	Status
001	00-03-22-35-70-8D	169.254.193.211	DC-D623HRX	DirectIP		Registered
002	00-03-22-35-70-8D	169.254.193.211	DC-D623HRX-N	DirectIP		Registered
003	00-03-22-34-17-5F	169.254.62.99	DC-T1233HRXL	DirectIP		Registered
004	00-03-22-18-9B-33	169.254.122.215	DC-D1233WHR	DirectIP		Registered
005	00-03-22-18-9B-33	169.254.247.70	DC-D1233WHR	DirectIP		Registered
006	00-03-22-18-9B-34	169.254.106.136	DC-D1233WHR	DirectIP		Registered
007	00-03-22-15-7D-5F	169.254.48.45	DC-T1233WR	DirectIP		Registered
008	00-03-22-15-7D-14	169.254.180.21	DC-T1233WR	DirectIP		Registered

- **Protocol:** Select the protocol you wish to search for that was used by the camera (or encoder).



- Even if the network device uses a protocol supported by the NVR, the device itself may not be visible for scanning and registration by the NVR. For more information about supported network devices and models, contact your retailer.
- The supported scan modes may vary depending on protocol selected.

- **Mode:** Select the scan mode.

- **Auto Scan(LAN):** Lists any cameras in a LAN environment. If Auto scan (LAN) fails to recognize the camera, try using IP Address scan instead.
- **IP Address:** Enter the IP address of a camera. The NVR scans for the camera that matches the specified address. If you enter an IP address range, the NVR scans for cameras falling under the specified address range. By specifying an IP address, you can also specify which port to use with the Remote Admin feature. It is recommended that you do not network the camera via DHCP (Dynamic Host Configuration Protocol). If the camera is networked via DHCP, the camera may not be connected properly depending on changes in the external network environment.



If Auto Scan (LAN) fails to recognize a camera, try using the IP Address scan instead.

- **Filter:** Enter a keyword in the MAC Address / Address / Model / Name / Status fields for the selected camera. This allows the user to scan this camera easily.



- When configuring a port, the device may fail to scan if the port selected for the NVR and the port selected for the camera differ. In this case, you must register the camera to change its IP address.
- The device to be registered must have different IP addresses. Otherwise, the connection may fail.

- **No.:** Select the registered camera number and click the **Add Camera** button to register the camera.
- **MAC Address:** Displays the scanned camera's MAC address.
- **Address:** Displays the scanned camera's IP address.
- **Model:** Indicates the camera model.
- **Protocol:** Indicates the scanned camera's protocol.
- **Name:** Displays the scanned camera's IP name.
- **Status:** "Registered" indicates the camera is registered to the NVR and "Not registered" indicates the camera is not registered to the NVR.

Login

If the password is set or you want to register third party cameras, registering a device requires an authorized user login.

- 1 Select the desired device from the list and click the **Add Camera** button, then the login window will appear.
- 2 Select a user, enter the password, and then select **OK**.



- By selecting **Apply to All Devices**, you can apply the same authentication information to all of the network devices in the list.
- When you select multiple network devices from the list and click the **Add camera** button, a window for the network device will appear. Select **Skip** to skip the authentication settings for the current network device and to display the Authentication window of the next network device.
- For IDIS cameras, a user and password may not be required.

Set Camera Password

For IDIS protocol cameras that support changing and finding the camera password, you must set the camera password at the time of initial camera registration. A mobile phone and email information are used to change and find the camera password.

- 1 Select the dedevice from the list and click the **Add Camera** button, then Set Password window will appear.

Set Password

Model

MNC5230BR

MAC Address

00:03:22:2F:48:0E

IP Address

169.254.216.40

User

admin

Password

Confirm

E-mail

Verification

☐ Not Use

OK

Cancel

- Only the camera that does not set password of the camera which supports the password setting function is displayed.

- 2 Enter the password, mobile phone, and e-mail address, and then select **OK**.

- If you do not authenticate your email address, you may not be able to find your password unless you enter the correct information.
- FEN setup is required for authentication. For more information on FEN setup refer to **FEN on page 100**.
- By selecting **Apply to All Devices**, you can apply the same password, mobile phone and e-mail information to cameras that require password settings in the scan list.
- When you select multiple network devices from the list and click the **Add camera** button, a window for the network device will appear. Select **Skip** to skip the authentication settings for the current network device and to display the Authentication window of the next network device.

- 3 When the password is set, the login window will appear.

General


Enable/disable the covert view and rename cameras.

No.	Title	Use	MAC Address	Password
1	CAM1	Normal	00:03:22:2F:48:0E	
2	CAM2	Normal	00:03:22:36:2B:D5	
3	CAM3	Normal	00:03:22:34:8A:CC	
4	CAM4	Normal	00:03:22:45:5B:8F	
5	CAM5	Normal	00:03:22:65:4B:48	
6	CAM6	Normal	00:03:22:35:FF:2A	
7	CAM7	Normal		
8	CAM8	Normal		
9	CAM9	Normal		
10	CAM10	Normal		
11	CAM11	Normal		
12	CAM12	Normal		
13	CAM13	Normal		
14	CAM14	Normal		
15	CAM15	Normal		
16	CAM16	Normal		
17	CAM17	Normal		
18	CAM18	Normal		
19	CAM19	Normal		


- Title:** Edit the camera's name.
- Use:** Set the camera as **Normal**, **Covert 1**, or **Covert 2**.
Live images and video recordings from cameras that have been set as **Covert 1** or **Covert 2** will not be available to users who do not have covert camera access. Setting a camera as **Covert 1** hides its images but does display OSD information about the camera. Setting a camera as **Covert 2** hides its images as well as ODS information about the camera as if it has been deactivated completely.
- MAC Address:** Displays the camera MAC address.
- Password:** Set the camera password.

Advanced Setup

Configure security and other advanced camera settings.

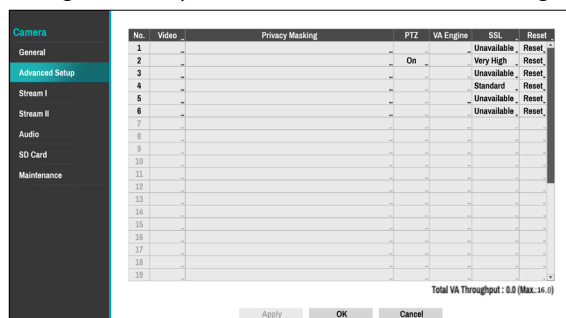

- **Video:** Adjust the camera image sensor settings such as white balance and exposure. Configuration options may differ depending on the camera model.
- **Privacy Masking:** Enable/disable and configure privacy masking for the camera.
- **VA Object Calibration:** Configure detailed settings for Object Detection and Face Detection engines. The following functions may vary depending on the actual camera type.

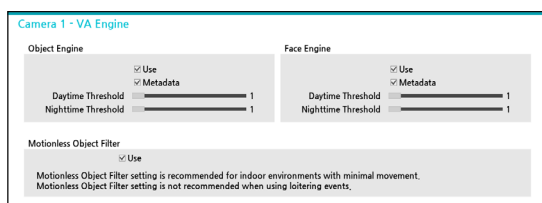


- **Use:** Enable/disable the event.
- **Metadata:** Enable/disable the Metadata for the event.
- **Daytime/Nighttime Threshold:** Adjust the day/night threshold for these engines.
- **Motionless Object Filter:** Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **SSL:** Set the camera's security level as **Unavailable**, **Standard**, **High**, or **Very High**. **Standard**, **High** and **Very High** settings apply SSL (Secure Sockets Layer) protection to the camera.

- ✓ The more cameras security level is set to **Very High**, the more the device loads may occur due to the decoding of received data such as video and audio. This may cause the total recording performance to decrease and not work as you set it to. In this case, you must improve the load by lowering the security level or by lowering the recording bitrate.

- **Reset:** Resets the port or cameras.


- **PoE Reset:** Control the PoE Switch's port. This option is available when connecting to Video In/ PoE port or using a DirectIP PoE Switch (optional). Select **PoE Reset** to reboot the camera. It is not supported by video encoders.
- **Soft Reset:** Reboots the camera.
- **Factory Reset:** Resets the NVR to all its initial factory settings. It is supported by DirectIP cameras only.
- **Mode:** Select a resolution mode. This is supported by video encoders only.
- **PTZ:** If using an RS-485-compliant camera, configure it for use in PTZ Mode.

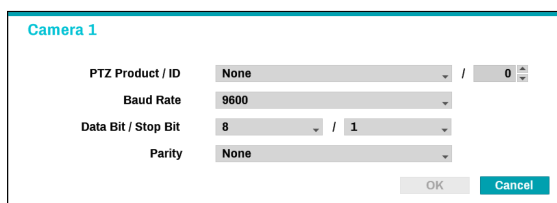

- **PTZ Product:** Choose to select the model of installed PTZ device.
- **ID:** Choose to assign an ID to each PTZ device.
- Choose to set up **Baud Rate**, **Data Bit**, **Stop Bit** and **Parity** of the connected device.


- ✓ Refer to the PTZ device manufacturer's instructions for the proper settings.

- ✓ Types of configuration options shown vary depending on the PTZ functions supported by the camera.

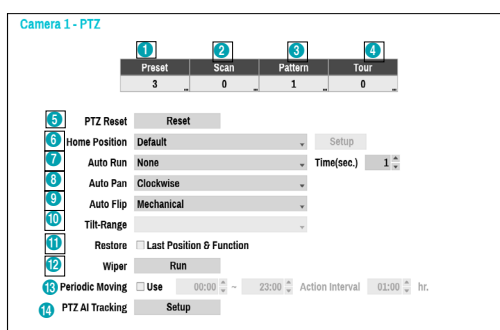

- ✓ Numbers shown below Preset, Scan, Pattern, and Tour indicate the numbers of configured functions.

① Preset

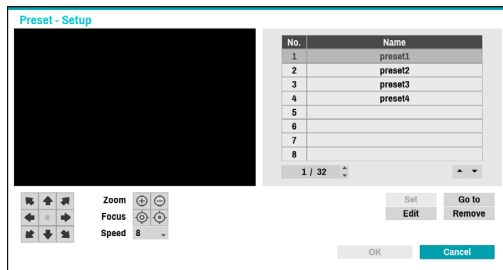


Use the buttons below to choose a preset position.


- **Directional Buttons** (⬅️⬆️⬇️⬅️⬆️⬇️⬅️⬆️⬇️): Used to tilt and pan the camera.
- **Zoom** (⊕ ⊖): Zoom in and out.
- **Focus** (🔍): Adjust camera focus to far or near.
- **Speed**: Specify the camera's panning and tilting speed.
- **Set**: Choose a preset number and then enter a name. This saves the current preset under the specified preset number and name.
- **Go to**: Select a preset from the list and then click Go to to move the camera to the selected preset position.
- **Edit**: Used to change the selected preset's name.
- **Remove**: Used to remove the selected preset.

② Scan

Used to set up a profile for moving the camera between two points. At least two presets must be available in order to use the scan feature.

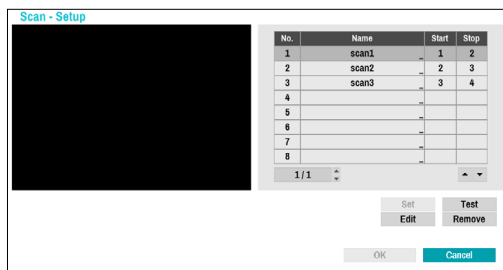


Set: Used to set up a scan profile.

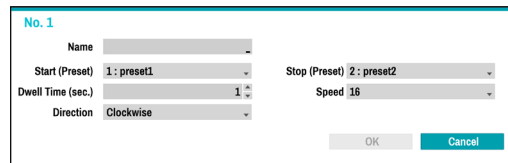

- **Name**: Enter a name for the scan profile.
- **Start/Stop**: Specify which presets to use as start and stop points.
- **Dwell Time (sec.)**: Specify how long the camera will dwell at start and stop positions.
- **Speed/Direction**: Specify scanning speed and direction.
- **Test**: Select a scan profile and then click Test to test it.
- **Edit**: Used to edit the selected scan profile.
- **Remove**: Used to remove the selected scan profile.

③ Pattern

Used to set up a pattern profile for the camera to follow along.

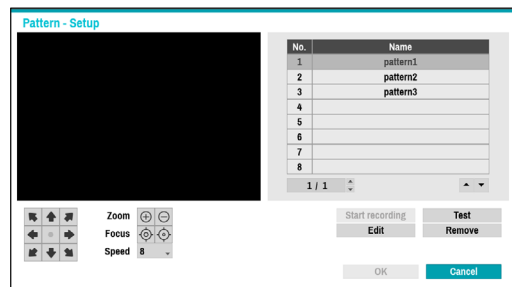

Start recording: Select a pattern number, enter a name for the pattern, and then click **OK** to save the pattern. Move the camera using directional, zoom, and focus buttons and then click **Stop recording** to save the pattern profile. You can record up to two minutes of movement.

- **Directional Buttons** (⬅️⬆️⬇️⬅️⬆️⬇️⬅️⬆️⬇️): Used to tilt and pan the camera.
- **Zoom** (⊕ ⊖): Zoom in and out.
- **Focus** (🔍): Adjust camera focus to far or near.
- **Speed**: Specify the camera's panning and tilting speed.
- **Test**: Select a pattern profile and then click Test to test it.

- **Edit:** Used to edit the selected pattern profile.
- **Remove:** Used to remove the selected pattern profile.

④ Tour

Used to set up a tour profile of multiple functions in a designated sequence.

Set: Used to set up a tour profile.

- **Name:** Enter a name for the tour profile.
- **Function:** Indicates the order of the function in the tour sequence.
- **Dwell Time (sec.):** Specify how long to perform the selected function for.
- **Speed:** Specify the preset speed.
- **Test:** Select a tour profile and then click Test to test it.
- **Edit:** Used to edit the selected tour profile.
- **Remove:** Used to remove the selected tour profile.

☒ Select **Apply** after setting up a preset, scan, pattern, or tour profile to see images from the concerned camera on the left side of the screen. Selecting **Apply** or **OK** displays a popup screen that indicates whether the profile has been set up successfully.


- ⑤ **PTZ Reset:** Reboots the camera's panning / tilting and zoom settings.
- ⑥ **Home Position:** Specify the camera's home position.
 - **Default:** Uses the factory-default position as the camera's home position.
 - **Custom:** Uses the user-defined position as the home position.
 - Select **Set** to change the home position.
- ⑦ **Auto Run:** Specify which action to take if the camera has not been controlled for the specified duration of time.
- ⑧ **Auto Pan:** Specify the camera's panning direction. When Auto Pan is selected from a remote program, the camera pans in the direction selected here.
- ⑨ **Auto Flip:** Automatically flips the image when the camera tilts past 90° to prevent the objects from appearing upside down.
 - **Digital:** Flips the image left to right or top to bottom.
 - **Mechanical:** Automatically pans or tilts the camera.
 - **Off:** Disables Auto Flip.
- ⑩ **Tilt-Range:** Specify the camera's tilting range.
- ⑪ **Restore:** Specify whether to restore the camera to its last position or function. Enabling this option restores the camera to its last position or function after being restarted.
- ⑫ **Wiper:** Operate the wipers connected to the camera (stop after three round trips).
- ⑬ **Periodic Moving:** Operate the PTZ camera at each operation cycle for the specified schedule period.
- ⑭ **PTZ AI Tracking:** Configure AI tracking function to be executed when IDLA events occur.

- **Use:** Select the usage for the PTZ AI tracking.
- **PTZ Sensitivity:** Set to between 1 (Low) and 5 (High).
- **Using Zoom:** Select whether to use the zoom


function during object tracking and choose the size of the object. The larger the object size is set, the larger the object will be displayed on the screen.

- **Dwell Time:** After the object tracking is completed, the camera monitors the end position for a set period of time and then moves the PTZ to the initial position.
- **Return Position:** Select the recovery position after tracking.

Privacy Masking Options

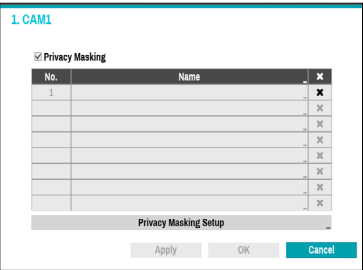


Select **Name** to rename the privacy masking area. Select the  icon to delete the existing privacy masking area. Select **Privacy Masking Setup** to display additional privacy masking area options. You can drag on the area with the mouse to resize it or add up to 16 different areas.



- **Edit:** Rename the selected privacy masking area.
- **Delete:** Delete the selected privacy masking area.
- **Save:** Save the changes and exit the privacy masking area options screen.
- **Cancel:** Exit the privacy masking area options screen without saving the changes.

Image Sensor Options

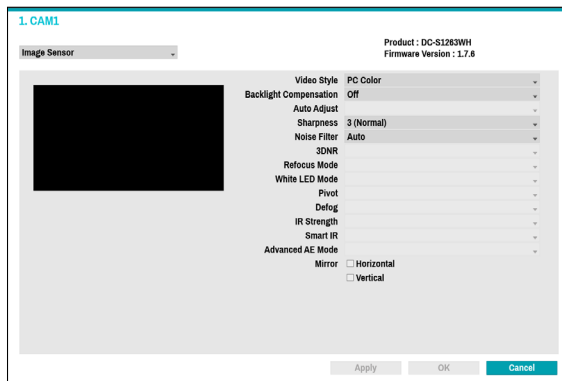


- **Product, Firmware Version:** Displays the camera model name and firmware version.
- **Video Style:** Select **TV1 Color** or **PC Color**.
- **Backlight Compensation:** Enable/disable Backlight Compensation. If enabled, objects are exposed brighter in backlit situations.
- **Auto Adjust:** Selecting **Auto** allows the system to assess the lighting conditions and adjust the setting automatically. Selecting **Manual** allows the user to adjust the setting manually.
- **Sharpness:** Adjust the sharpness level. Adjust the contours to make the images look sharper. Increasing the value raises the sharpness level, but using too high a value can result in unwanted noise.
- **Noise Filter:** Select the noise filter level. Noise filter can reduce the noise in images taken under low-lighting conditions. Increasing the value reduces the noise, but using too high a value can result in blurry images.
- **3DNR :** Enable/disable 3DNR (3D Noise Removal). 3DNR reduces background noise in images taken under low-lighting conditions. 3DNR does not produce blurry images like Noise Filter but can result in ghosting.
- **Refocus Mode :** Readjust the focus of the camera when changing daytime to nighttime or nighttime to daytime.
 - **On/off:** Enable/disable **Refocus Mode**.
 - **DN Mode Shift:** When image of the camera is switched to daytime or nighttime, the focus of the camera will be adjusted.
 - **IR Adaptive Shift:** Readjust the focus of the camera when IR is detected by the camera.
- **White LED Mode:** Clicking on/off enables or disables White LED lighting when motion is detected by the PIR sensor. Also clicking auto allows the system to enable/disable **White LED mode** automatically.
- **Pivot:** Enable this option and choose the direction of the pivot. You can turn the image by 90 degree in the clockwise or counterclockwise direction. This feature is particularly effective when monitoring hallways, passages, and other confined spaces.
- **Defog:** Disables or enables the Defog feature. When it is enabled, image with a fog is adjusted.
- **IR Strength:** Adjust the IR LED's brightness level. Select a brightness level manually between 0% (darkest) and 100% (brightest). Selecting Auto(Smart IR) allows the system to control the IR LED's brightness level automatically.
- **Smart IR:** Help solve the problem of infrared LEDs whitening out images, such as people's faces, when they are too close to the IR LEDs of a night vision camera. In this case, the image is adjusted through AE control.
- **Advanced AE Mode:** Select desired setup mode between **Normal** and **Number-Identification**. In **Number-Identification** mode, when a certain area of imadges is too bright due to backlight under low lighting conditions and it causes the other area to be too dark, this function provides the other area of images brightly and clearly by blocking the backlight in the certain area. Dark parking lot entrances and gas station entrances at night, for example (Local Exposure compensates for the bright light coming from incoming vehicle headlights and makes it possible to see the license plates). When setting to the **Number-Identification** mode, some option settings will be adjusted automatically, and you cannot change them as long as the Setup Mode is not changed.
- **Mirror:** Select **Horizontal** or **Vertical** to flip the image horizontally and/or vertically.



Select **Apply** after setting up a camera to see images from the concerned camera on the left side of the screen. Selecting **Apply** or **OK** displays a popup screen that indicates whether the camera has been set up successfully or not.


White Balance Options

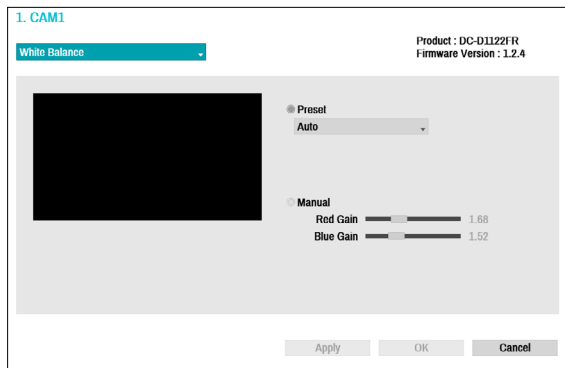

- **Preset:** Use preconfigured white balance settings.
 - **Auto:** Allow the system to adjust the white balance automatically. The system will assess the lighting conditions and adjust the white balance automatically.
 - **Incandescent - Fluorescent Cold:** Select a lighting type to apply the appropriate white balance.
- **Manual:** Adjust the white balance manually. Adjust Red and Blue gain values. Greater the value, greater the intensity of the corresponding color.

☒ Select **Apply** after setting up a camera to see images from the concerned camera on the left side of the screen. Selecting **Apply** or **OK** displays a popup screen that indicates whether the camera has been set up successfully or not.

Exposure Options

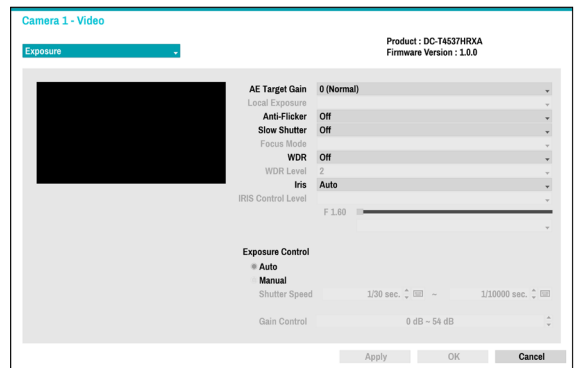


- **AE Target Gain:** Specify exposure compensation's target gain. Exposure is compensated automatically based on the specified target gain. Higher the gain, brighter the images.
- **Local Exposure:** Activate Local Exposure. Use Local Exposure on images that appear too dark due to backlighting conditions and on images containing over-exposed sections. Greater the value, clearer the image. e.g.) Dark parking lot entrances and gas station entrances at night (Local Exposure compensates for the bright light coming from incoming vehicle headlights and makes it possible to see the license plates).
- **Anti-Flicker:** If the lights in the area where the camera is located use alternating current, specify the frequency of the lights to minimize flickering. Matching the frequencies can eliminate flickering completely. (NTSC: 60Hz, PAL: 50Hz).
- **Slow Shutter:** Activate Slow Shutter. The slow shutter mode functions only under low lighting conditions. When the slow shutter mode is enabled, images are displayed bright even under the low-lighting conditions. There may be a difference in the way it functions depending on the camera model. See the camera user's manual for details.
- **Focus Mode:** Used to change the focus movement format as Auto/Manual/Semi-Automatic. It may not be supported depending on the device.
- **WDR:** Disables or enables the WDR (Wide Dynamic Range). When the very dark and very bright areas exist simultaneously on the screen, WDR allows you to recognize the both areas.
- **WDR Level:** This option is available only when **WDR** function is set to **On**.

- **IRIS:** Depending on the camera type, the user can select DC-IRIS or P-IRIS.
 - **DC IRIS**
 - **OFF** : Select this if a manual IRIS lens is mounted on the camera.
 - **DC-IRIS (Auto)** : Select This if a DC-type auto IRIS lens is mounted.
 - **P-IRIS**
 - **P-IRIS (Auto)** : The system will assess the lighting conditions and adjust the openness of IRIS automatically.
 - **P-IRIS (Fix)** : Use the slider to select the desired openness of IRIS. Select the most suitable value for the lighting conditions in the area where the camera is located.
- **IRIS Control Level:** Adjust the openness of the lens IRIS. The larger levels look brighter, the smaller levels look darker. (DC-IRIS (Auto) type only)
- **Exposure Control:** Adjust Shutter Speed and Gain. This option is available only when **Anti-Flicker**, **Slow Shutter** and **WDR** are all set to **Off**.
 - **Auto:** The system will assess the lighting conditions and adjust the shutter speed and gain automatically.
 - **Manual:** Use the slider to select the desired shutter speed and gain. Select the most suitable minimum and maximum shutter speeds and gains for the lighting conditions in the area where the camera is located.-

☒ Select **Apply** after setting up a camera to see images from the concerned camera on the left side of the screen. Selecting **Apply** or **OK** displays a popup screen that indicates whether the camera has been set up successfully or not.

Day & Night Options

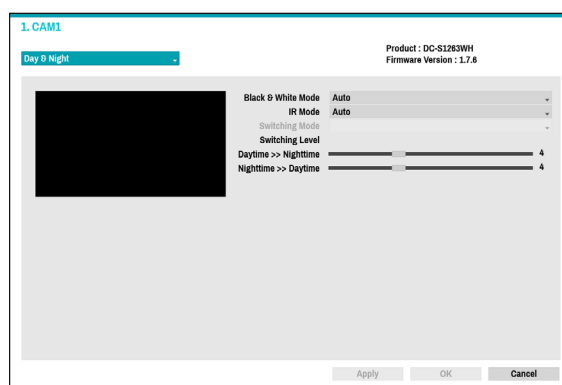


- **Black & White Mode:** Display the images in grayscale for greater clarity in low-lighting conditions.
 - **On/Off:** Enable/disable **Black & White Mode**.
 - **Auto:** Allow the system to enable/disable **Black & White Mode** automatically.
 - **Schedule:** Set up the **Black & White Mode** schedule. **Black & White Mode** is disabled for all days and times that are designated as **Daytime** in the schedule and is enabled at all other times.
- **IR Mode:** **IR Mode** blocks out the infrared spectrum. You can ensure clear images at all times by blocking out the infrared spectrum in high-lighting conditions and allowing the infrared spectrum to pass through in low-lighting conditions.
 - **Daytime Mode/Nighttime Mode:** Enable/disable **IR Mode**.
 - **Auto:** Allow the system to enable/disable **IR Mode** automatically.
 - **Schedule:** Set up the **IR Mode** schedule. **IR Mode** is disabled for all days and times that are designated as **Daytime** in the schedule and is enabled at all other times.

☒ Some camera models may not support the **Schedule** function.

- **Switching Mode :** Changes the switching mode of daytime and nighttime. In normal mode, daytime/nighttime is switched through the amount of light received by the ambient light sensor. In advanced mode, it is switched through the amount of light and the analysis of the camera video.
- **Switching Level :** Controls the changing time of daytime / nighttime mode, depending on the Switching Level. The higher the value is, day / nighttime mode is changed under high-lighting conditions. Also the lower the value is, day / nighttime mode is changed under low-lighting conditions.

View Options

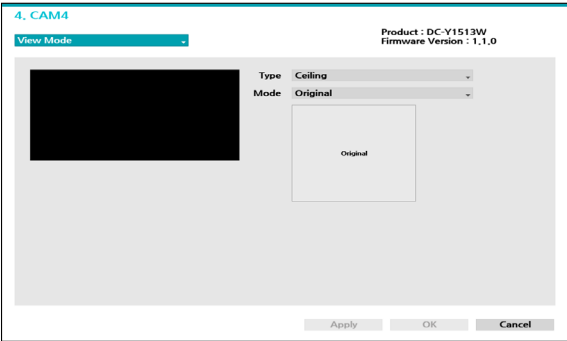


- **Type:** Selects the camera view.
- **Mode:** Selects the screen layout in live mode.




- Dewarping feature is not supported when mode is set to the original.
- When changing the view mode, the resolution will be applied automatically.

Miscellaneous

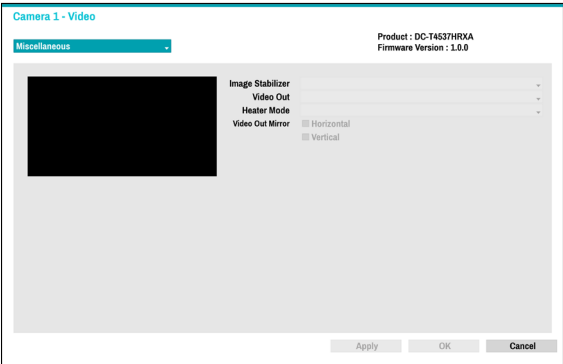

- **Image Stabilizer:** Activate Image Stabilizer. The Image Stabilizer reduces blurring caused by camera shake that results from external conditions such as the wind.
- **Video Out:** Select NTSC or PAL as the method of camera analog video output.
- **Heater Mode:** Set whether to use the heater. If On, the heater will operate if the camera's temperature is lower than the heater operating temperature. If Off, the heater will not operate regardless of temperature.
- **Video Out Mirror:** If the video output is CVBS, the screen can be inverted.

Stream I

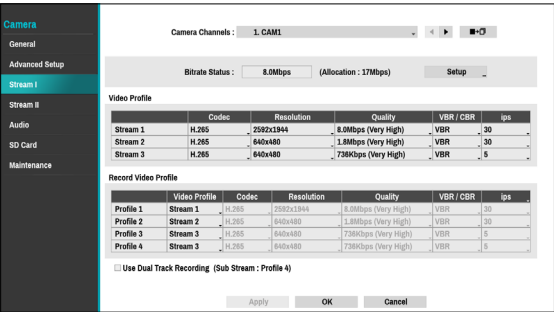

- Configure the camera's live and recording resolution, codec, picture quality, transfer speed, and ips speed settings.
- **Camera Channels:** It's possible to configure a unique video profile for each camera.
 - **Bitrate Status:** Display the highest value of stream. Click the Setup button to change the allocation for each channel. For more information on bitrate, refer to [Camera View Buttons on page 17](#).
 - : Apply the video profile settings of the camera selected under Camera Channel to a different camera.
 - **Video Profile:** Check the current Live video picture quality and edit remote video profile settings.
 - **Record Video Profile:** Set up 4 recording quality profiles.

- **Video Profile:** Select **Stream 1**, **Stream 2**, **Stream 3**, or **Custom** (available from Record Video Profile only).
 - **Codec:** Supports H.264 and H.265.
 - **Resolution:** Select a resolution supported by the camera. Maximum available resolution is chosen automatically based on the selected video profile.
 - **Quality:** Assign different Quality settings to different cameras.
 - **VBR/CBR:** Select **VBR** or **CBR**. Transmitted data size varies depending on the amount of movements in the images with **VBR** but is fixed with **CBR**.
 - **ips:** Select a value between 1 and 30. Maximum **ips** is determined automatically based on the selected video profile.
- **Use Dual Track Recording:** Set to record with the video profile value (main stream) set in the schedule and record with the profile 4 value (sub stream) at the same time.



- It displays as below when recording on a network video recorder.
 - If the screen layout is less than 3x3, video profile (main stream) is displayed and if it is larger than 3x3, profile 4 (sub stream) is displayed.
 - If the channel is larger than 3x3 size on the screen layout such as 1+7 and 1+12, the video profile (main stream) is displayed first but otherwise the profile 4 (sub stream) is displayed first.
- This function is supported only for NVRs or cameras supporting dual recording function.

Stream II

No.	Failover Profile	Intelligent Codec	MAT	Sensor Mode
1	Profile 1	OFF	OFF	Normal
2	Profile 1	OFF	OFF	Normal
3	Profile 1	OFF	OFF	Normal
4	Profile 1	OFF	OFF	Normal
5	Profile 1	OFF	OFF	Normal
6	Profile 1	OFF	OFF	Normal
7	Profile 1	OFF	OFF	Normal
8	Profile 1	OFF	OFF	Normal
9	Profile 1	OFF	OFF	Normal
10	Profile 1	OFF	OFF	Normal
11	Profile 1	OFF	OFF	Normal
12	Profile 1	OFF	OFF	Normal
13	Profile 1	OFF	OFF	Normal
14	Profile 1	OFF	OFF	Normal
15	Profile 1	OFF	OFF	Normal
16	Profile 1	OFF	OFF	Normal
17	Profile 1	OFF	OFF	Normal
18	Profile 1	OFF	OFF	Normal

Configure the camera's failover profile, intelligent codec and MAT settings.

- **Failover Profile:** Select a video profile for the smart failover recording.
- **Intelligent Codec:** Lower bitrate by using the intelligent codec.




- Some camera models may not support the Intelligent Codec function.
- When using intelligent codec function, the start of some functions, such as clip copy or clip attachment can be changed to an earlier point than the selected point.

- **MAT Setup** : Select the MAP Setup option to use the MAT (Motion Adaptive Transmission) function during video transmission and recording.



- When the MAT (Motion Adaptive Transmission) function is active, the associated VA device may not work properly.
- It is recommended that you do not use the MAT function of the associated camera to increase the accuracy of the image analysis.
- Some camera models may not support the MAT function.


* **MAT function(Motion Adaptive Transmission)** reduces bandwidth overload and saves storage capacity by reducing the frame rate of the video during periods of inactivity. The user can select the period of sustained inactivity which triggers this function by adjusting Inactivity Period.

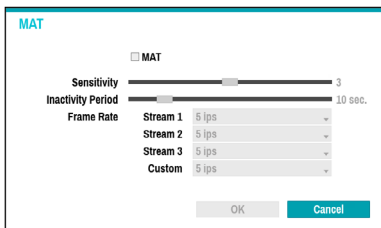

- **Sensitivity** : Set the motion detection sensitivity. Higher values will result in more sensitive motion detection.
- **Inactivity Period** : Set the Inactivity Period. If motion is not detected for the duration of time specified, video is transmitted and recorded using the frame rate designated below until movement is detected again.
- **Sensor Mode**: Set the camera resolution to 16:9, 4:3. Depending on the mode you have set, the resolution that can be set in the stream section changes.

Audio

Configure audio recording settings for all cameras simultaneously.

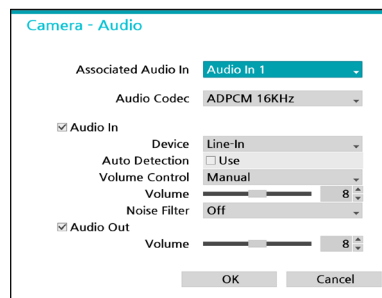

- **Audio Codec**: Select an audio codec. (G.711 u-Law, G.711 a-Law, G.722, ADPCM 16KHz, G.726 or OPUS 16KHz)



The supported audio codec types may vary depending on the camera model.

Associated Audio In: Associates the selected audio channel with the camera. It is supported by video encoders only.

- **Audio In**
 - **Device**: Select an audio input source (microphone, line-in or HDMI) and then adjust the volume.
 - **Auto detection**: Detects the audio input and automatically selects the audio-in device.
 - **Volume Control**: Adjust the volume manually or automatically. Select the **Auto** option to adjust the volume automatically depending on the surrounding circumstances.
 - **Volume**: Adjust the volume manually by using the slider.
 - **Noise Filter**: reduces the environmental noise and enhances the voice. If you turn on the noise filter, the sound may be distorted somewhat. We recommend that you do not use this function in a loud place because it may degrade performance.

- **Audio Out:** Adjust the volume.



Cameras do not feature built-in audio amplifier units and therefore require the user to purchase a speaker system with a built-in amplifier separately.

SD Card

If connection between the camera and NVR fails, the video will be recorded on SD memory card of the camera. When the connection is recovered again, the recorded video on SD memory card will be recorded on the NVR. For more information on Smart Failover, refer to the **Smart Failover on page 62**.



- **Recycle** : When there is not enough storage available on SD memory card, the oldest video will be deleted automatically.
- **Format** : Click on this button to format the inserted SD card. Formatting the SD card deletes all data saved on the card.
- **Status** : Display the status of the SD card.



- This function is only supported for the cameras supporting Failover recording of SD memory card.
- For cameras in use by other NVRs or the newly registered cameras, the Format option displays **Other**. Please format the SD card to use this function.

Maintenance

When using NetFS, select Firmware Upgrade. You can select or USB port or NetFS. If not, you can only select USB port.

Select USB port to display USB search window and then select the corresponding upgrade package from the storage device connected to the NVR's USB port. After selecting an upgrade package, select Apply to upgrade the camera. Camera settings can be imported or exported.

No.	Product	Version	Import	Export	Firmware Upgrade
1	DC-T1745HRXA	1.0.0			
2	MNC315VR	1.5.5			
3	DC-Y3C14WRX	2.0.0			
4	DC-S3283WHX	2.2.0			
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					

-  If an upgrade attempt fails, an upgrade failure message will be displayed. Refer to **Error Code Types in the installation manual** for more details.
- The camera will reboot after the upgrade and then reconnect automatically.

Record Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

General

Configure general recording settings.

Record

General

Advanced Setup

Schedule

Pre-Event

Smart Failover

Statistics

☒ Recycle

☐ Record Audio

Event Record Dwell

5 sec.

Auto Deletion

Dwell

0

Never

☒ Recording Failover Service

☒ Use Panic Recording

Panic Recording Duration

No Limit

Video Profile

Profile 1

Default

Apply

OK

Cancel

- Recycle:** When the recording disks become full, the system overwrites existing data with new data, starting with the oldest first. If **Recycle** is disabled, recording will simply stop when the recording disks reach their maximum capacity.
 - Record Audio:** The camera will record audio along with video.
 - Event Record Dwell:** If linked recording is designated as an event-triggered action, recording takes place for the duration specified under this setting.
 - Auto Deletion:** Configure this option to delete recording data automatically after the specified number of days has elapsed.
 - Dwell:** Recording data will be stored on the NVR for the specified number of days and then deleted automatically. It can be set from 1 day to a maximum of 999 days.
- 

 - To disable Auto Deletion, select **Never**.
 - Recording data are deleted automatically at midnight and will be deleted even if the system reboots or the Auto Deletion setting has been changed.
- Recording Failover Service:** When a network failure is restored, videos stored on the camera SD memory card can be recorded on the NVR.



Data from the camera SD memory card can not be recorded to the NVR if the recording failover service function is not selected.

- **Use Panic Recording:** Enable/disable Panic Recording.
- **Panic Recording Duration:** Disable Panic Recording automatically. Select between 5 mins and 1 hr. If you do not wish to disable the feature automatically, select **No Limit**.
- **Video Profile:** Select a recording profile value for Panic Recording.

Advanced Setup

Quota Based Time

- **Limit Time-Lapse Recording:** You can store event recording data for longer. If you do not wish to use **Limit Time-Lapse Recording**, select **Never**. This function is activated when data has been stored for longer than as configured because the recording disk has sufficient capacity and saves new data by overwriting **Time Lapse Recording** data that are older than as specified under Recycle mode.
- **VA Data Protect Duration:** Configure this option to select the data protection period. Select between 1 day and 90 days.



- If the recording stored on the disk is shorter than the duration specified under **Limit Time-Lapse Recording**, the older of **Event Recording** or **Time Recording** data is deleted first.
- The system's recording time may change depending on recording quality, resolution, motion, and other configurations made by the user. The duration specified under **Limit Time-Lapse Recording** may not be guaranteed in certain situations.


Quota Based Size

Cameras and disks are grouped to enable recording according to the set ratio.


Click the + icon at the bottom left corner of the Camera Group list table to group the cameras by specifying the camera numbers as below.

Click the + icon at the bottom left corner of the Storage Group list to create a separate storage group by setting the recording storage space of each camera group.

Schedule

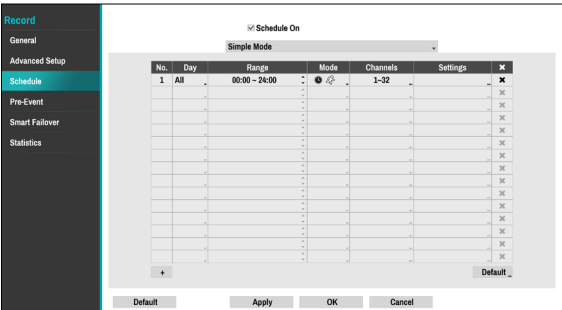

<Simple Mode>

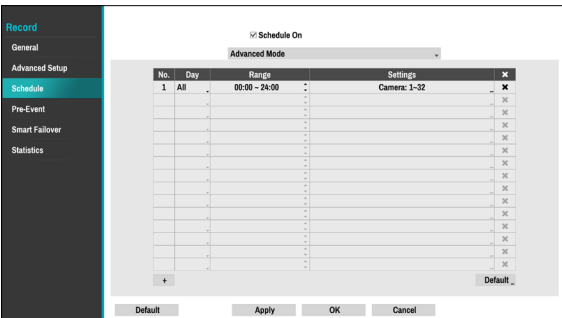

<Advanced Mode>

Disabling **Schedule On** suspends schedule recording regardless of the schedule and displays the  icon on the upper left corner of each camera screen. Pressing the **Panic Record** button displays the  icon and commences panic recording.

Set Record Schedule mode as **Simple Mode** or **Advanced Mode**. **Advanced Mode** allows you to configure a unique recording schedule for each event. Select the  icon to delete a schedule.

- ☒ Changing the recording schedule mode suspends all active event-linked actions.
- Select the + button on the bottom left of the screen to add a schedule. Select **Day** to specify the **Day** setting or select **All**. Select **Scope** to specify the time frame.
- To use the IDLA function, you need to set up a time-lapse or pre-event recording schedule in advance. Otherwise, the video may not be displayed when searching the event log.

Simple Mode Options

- **Mode:** Select **No Record**, **Time**, **Event**, or **Time & Event**.

No Record	Unless the Panic Record button is pressed, no recording will take place during the scheduled time frames on the scheduled days.
Time	The  icon appears on the upper left corner of the screen. The  icon appears at scheduled times to indicate recording is in progress.
Event	The  icon appears on the upper left corner of the screen. The  icon appears when the specified event occurs to indicate recording is in progress. ☒ If Pre-Event is enabled, the  and  icons appear when recording is not in progress, or the  and  icons appear when an event occurs and recording is in progress.
Time & Event	The  icon appears on the upper left corner of the screen and recording commences as per the video profile selected for time under Setup . When an event occurs, the icon changes into  icon and recording commences as per the video profile selected for events under Setup .

- **Channel:** Select which cameras to apply the schedule to.
- **Settings:** Select to configure default recording profile values for Time Lapse and Event Recording modes.

Schedule 1 - Settings

Mode	Video Profile
Time	Profile 2
Event	Profile 1

OK
Cancel

If a camera supporting the Dual Track Recording function (Main and Sub stream) is in use, the following icon will be displayed.

	Recording both mainstream and substream
	Recording one of the mainstream and substream
	Failed to record both mainstream and substream

Advanced Mode Options

Select to configure event types and video profiles.

- **Type:** Event-specific and time recording icons are as follows:

	Time Lapse (Time)		Audio Detection
	Alarm-In		Trip Zone
	Motion		Tampering
	Video Loss		Text-In
	Recording Fail		VA Loss
	Loitering		Tampering Switch
	Exceed Occupancy Limit		Mask Rule Violation
	Social Distancing Violation		Queue Congestion
	Object Detection		Line Crossing
	Intrusion		Face Detection
	Network Alarm		Intercom
	Exceed Vehicle Count		

- **Video Profile:** Configure the profile to use for recording.
 - **Dwell:** Specify how long to record for after a corresponding event occurs.
- ☒
 - When multiple schedules are applied to a single channel, the settings of the most recently configured schedule will be applied.
 - Channels not included in the current schedule will follow the previous schedule. However, if the channel was not included in any previous schedules, recording for that channel will not occur.
 - If multiple events take place on a specific channel and different **Video Profile** and **Dwell Time** settings apply, highest settings apply to all event-linked recordings.

Pre-Event

When an event occurs, enabling this option includes the specified duration prior to the event in the event-triggered recording.

- **No.:** Select which cameras to apply Pre-Event to.
 - **Video Profile:** Select a video profile for the recording.
 - **Dwell:** Specify the duration of pre-event recording data.
- ☒
- If no event mode schedule exists in the schedule, a warning message prompting you to add an event mode schedule will be displayed.
 - The warning message will appear even in **Time & Event** mode.
 - To use the IDLA function, you need to set up a time-lapse or pre-event recording schedule in advance. Otherwise, the video may not be displayed when searching the event log.

Smart Failover

When the connection is recovered again, Smart Failover Service enables the data recorded on SD memory card to record on NVR.

- **Smart Failover:** Depending on whether Recording Failover Service is in use, the screen indicates "Smart Failover: Use, or Unuse"
 - **Recorded Data:** Indicates the time information of the recorded data.
 - **Status:** Indicates the current status of the recorded data, depending on whether SD memory card is inserted.
- ☒
- This function supports only if selecting the **Recording Failover Service**.
 - This function is only supported for the cameras supporting Failover recording of SD memory card.
 - If the camera is reconnected during recording, the video recording will restart from the beginning.

Statistics

Displays the throughput and recordable time that is being recorded depending on the camera and storage capacity by each group set in the NVR.

Statistics [AVG. (1week)]

Camera Group	Throughput	Capacity	Recordable Time
GROUP1	2.7 MB/sec.	5.99 TB	About 25.7 days
GROUP2	526 KB/sec.	8.00 TB	About 6.0 months
GROUP3	-	8.00 TB	-
GROUP4	-	7.00 TB	-

Note: Results may vary depending on camera settings or video conditions.

Storage Calculator

Camera Group	Throughput	Capacity	Recordable Time
GROUP1	8.0 MB/sec.	2.0 TB	-
GROUP2	8.0 MB/sec.	2.0 TB	-
GROUP3	8.0 MB/sec.	2.0 TB	-
GROUP4	8.0 MB/sec.	2.0 TB	-

Buttons: Apply, OK, Cancel

Statistics

- **Camera Group:** Indicates the name of the camera group.
- **Throughput:** Indicates the throughput of all cameras in the camera group. It is based on the longest accumulated time unit. Clicking ... icon under **Throughput** tap displays the throughput that accumulates data by camera group, showing data throughput in terms of average duration, as shown below.

GROUP1 - Throughput

No.	AVG. (1minute)	AVG. (1hour)	AVG. (1day)	AVG. (1week)
Total	2.7 MB/sec.	2.7 MB/sec.	2.8 MB/sec.	2.7 MB/sec.
1 (Main)	188 KB/sec.	200 KB/sec.	203 KB/sec.	201 KB/sec.
1 (Sub)	188 KB/sec.	200 KB/sec.	203 KB/sec.	201 KB/sec.
2 (Main)	101 KB/sec.	101 KB/sec.	106 KB/sec.	104 KB/sec.
2 (Sub)	101 KB/sec.	101 KB/sec.	106 KB/sec.	104 KB/sec.
3 (Main)	126 KB/sec.	126 KB/sec.	134 KB/sec.	133 KB/sec.
3 (Sub)	126 KB/sec.	126 KB/sec.	134 KB/sec.	133 KB/sec.
4 (Main)	86 KB/sec.	87 KB/sec.	88 KB/sec.	87 KB/sec.
4 (Sub)	86 KB/sec.	87 KB/sec.	88 KB/sec.	87 KB/sec.
5 (Main)	61 KB/sec.	60 KB/sec.	62 KB/sec.	62 KB/sec.

Buttons: Export, Close

- **Capacity:** Indicates the sum of all storage capacity in the camera group. Click ... icon under **Capacity** tap to calculate the capacity and throughput by each group and display the remaining time for recording.

GROUP1 - Capacity

HDD	Capacity	Free Space	Throughput	Time remaining (Until overwritten)
Total	5.99 TB	5.91 TB	2.7 MB/sec.	About 24.9 days

Buttons: Export, Close

- **Recordable Time:** It calculates the throughput and capacity of the camera group and displays the recordable time.
- **Reset:** Initializes accumulated throughput data used by statistics.



Results may vary depending on camera settings or video conditions.

Storage Calculator

You can check recordable time by setting the throughput and capacity by each camera group.

Click **Calculate** button to calculate the capacity and throughput by camera group of storage calculator and display the recordable time.

Event Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

System Event

Use this option to configure Monitoring settings.

Event	Settings	Actions
System	Never	☐
Boot Up		☐
Restart		☐
Shutdown		☐
Panic Record		☐
Check Recording	Off	☐ ☐
Check Alarm-in	Off	☐ ☐
Disk Almost Full	90 %	☐ ☐
Disk Full		☐ ☐
Disk Partially Almost Full	90 %	☐ ☐
Disk Partially Full		☐ ☐
Disk Bad	50 %	☐ ☐
Disk Temperature	-10 °C / 70 °C	☐ ☐
Disk S.M.A.R.T.		☐ ☐
Fan Error		☐ ☐
Storage Disconnected		☐ ☐
Disk Config Change		☐ ☐
No Storage Found		☐ ☐
Consecutive Invalid PW		☐

Default Apply OK Cancel

- **Settings:** Configure when and what the system should monitor for.
- **Actions:** Configure alarm-out (NVR alarm-out channel, NVR beep, camera alarm-out channel) and notification (email, LAN1 through 5, push, HTTP, alert window) settings.

Monitoring Options

System	Define monitoring times. If self-diagnosis is not performed on a regular basis, the system will assume an error.
Bootup, Restart, Shutdown	Define bootup, restart and shutdown actions.
Panic Record	Define panic recording actions.
Check Recording	The system will assume an error if the system has been scheduled to record normally but recording does not take place during scheduled intervals. ☒ Select Schedule On and then configure the days of the week, times, and monitoring interval. Select the + button on the bottom left of the screen to add a schedule. Select X icon to delete the schedule.
Check Alarm-In	The system will assume an error if the alarm-in status does not change during the specified monitoring interval while alarm-in is active.
Disk Almost Full	Generates an event if the disk reaches the specified capacity (80% to 99%).
Disk Full	Generates an event when all disks reach their maximum capacity.
Disk Partially Almost Full	Generates an event when a disk in one of multiple quota groups reaches the specified capacity (80% to 99%).


Disk Partially Full	Generates an event when a disk in one of multiple quota groups reaches the specified capacity.
Disk Bad	Generates an event when the specified percentage of the disk becomes damaged. Set to between 10% and 90% in 10% intervals.
Disk Temperature	Specify high/low threshold temperature. If the temperature of any storage device is below the set low temperature threshold or above the high temperature threshold, the system will issue an alert. (Depending on the HDD model, performance may degrade in low temperature environments.)
Disk S.M.A.R.T.	Monitors disks that support S.M.A.R.T. and notifies the user if a disk error is detected.
Fan Error	Notifies the user when the fan inside the system malfunctions.
Storage Disconnected	Notifies the user if the storage becomes disconnected while in use.
Disk Config Change	It will be highlighted when the NVR reboots after the hard disk drive has been replaced.
No Storage Found	It will be highlighted when no hard disk drive has been connected.
Consecutive Invalid PW	It will be highlighted when login fails by entering a wrong password for consecutive attempts.
RAID BROKEN	It will be highlighted when the mirroring configuration is broken.
Degrade	It will be highlighted when one of the HDDs composing mirroring is in error.




- For system events, only an e-mail notification of actions can be selected.
- In order to use the Notify(Callback) feature, the NVR must be registered to the remote program on the receiving PC's end.
- For mor information on RAID Broken and Degrade, refer to Mirror Configuration error on 39.

Camera System


A list of events that occur in the camera except for video analysis.

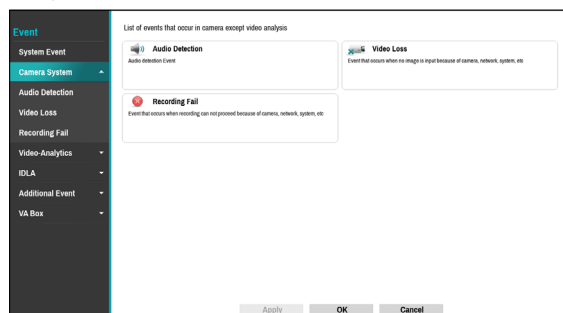

Camera System_Audio Detection

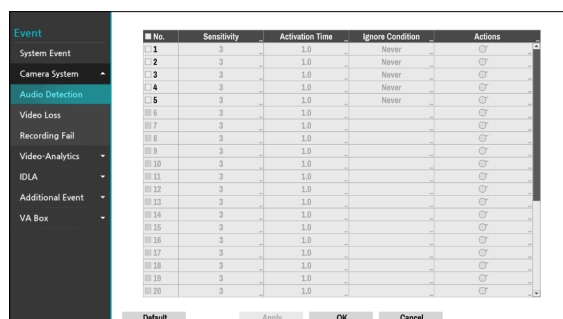

- No.:** Select which cameras to apply Audio Detection to.
- Sensitivity:** Set to between 1 (Low) and 5 (High).
- Activation Time:** Specify how long audio detection has to last in order for it to be considered as an event. When the audio detection is not detected for the specified duration of time, it will not be considered as an event.
- Ignore Condition**

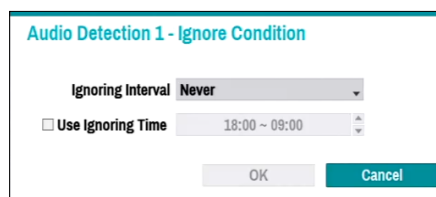

- Ignoring Interval:** The system does not produce event log entries or remote notifications for audio detected within a certain period of time after the audio of the camera channels is detected. Set a value between 1 sec and 5 secs or choose **Never**.

- **Use Ignoring Time:** Select **Time Setup** to specify the audio detection ignore time of camera channels. Audio detection will be disabled during the specified time frame.
- **Actions:** Specify which actions to take when audio detection events occur.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to Event or Time & Event mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.



In order to use the Callback feature, the NVR must be registered on the remote program.

Camera System_Video Loss

No.	Activation Time	Ignoring Interval	Actions
1	20 sec.	Never	○
2	20 sec.	Never	○
3	20 sec.	Never	○
4	20 sec.	Never	○
5		0.1 sec.	○
6		0.1 sec.	○
7		0.1 sec.	○
8		0.1 sec.	○
9		0.1 sec.	○
10		0.1 sec.	○
11		0.1 sec.	○
12		0.1 sec.	○
13		0.1 sec.	○
14		0.1 sec.	○
15		0.1 sec.	○
16		0.1 sec.	○

Analog
☐ Use Ignoring Time Time Setup
 Default Apply OK Cancel

- **Activation Time:** Specify how long video loss has to last in order for it to be considered as an event. When the video loss is not detected for the specified duration of time, it will not be considered as an event.
- **Actions:** Specify which actions to take when a Video Loss event occurs.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to **Event** or **Time & Event** mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, HTTP, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.



In order to use the Callback feature, the NVR must be registered on the remote program.

- **Ignoring Interval:** The system does not produce event log entries or issue remote notifications for video loss detected for the time specified after the initial video loss was detected. Set the value between 0.1 and 15 seconds or choose **Never**. This is supported only when video encoders are connected.
- **Use Ignoring Time:** Select **Time Setup** to specify the time to ignore video loss detection. Video loss detection will be disabled for a specified time period. This is supported only when video encoders are connected.

Camera System_Recording Fail

No.	Activation Time	Actions
1	30 sec.	
2	30 sec.	
3	30 sec.	
4	30 sec.	
5	30 sec.	
6	30 sec.	
7	30 sec.	
8	30 sec.	
9	30 sec.	
10	30 sec.	
11	30 sec.	
12	30 sec.	
13	30 sec.	
14	30 sec.	
15	30 sec.	
16	30 sec.	
17	30 sec.	
18	30 sec.	
19	30 sec.	
20	30 sec.	

- **Activation Time:** Specify how long recording fail has to last in order for it to be considered as an event. When the recording fail is not detected for the specified duration of time, it will not be considered as an event.
- **Actions:** Specify which actions to take when a Recording Fail event occurs.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to **Event** or **Time & Event** mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, HTTP, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.

☒ In order to use the Callback feature, the NVR must be registered on the remote program.


Video-Analytics

Event lists that occur through video analysis include Motion, Tampering, TripZone and Auto Tracking events.

Video-Analytics_Motion


Event	No.	Zone	Setup	Condition	Actions
System Event	1	768	Sensitivity : 3/3, Min. Blocks : 1/1		
Camera System	2	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	3	506	Sensitivity : 3/3, Min. Blocks : 1/1		
Video Analytics	4	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	5	576	Sensitivity : 3/3, Min. Blocks : 1/1		
	6	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	7	320	Sensitivity : 3/3, Min. Blocks : 1/1		
TripZone	8	320	Sensitivity : 3/3, Min. Blocks : 1/1		
Tampering	9	320	Sensitivity : 3/3, Min. Blocks : 1/1		
RLA	10	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	11	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	12	320	Sensitivity : 3/3, Min. Blocks : 1/1		
Additional Event	13	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	14	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	15	320	Sensitivity : 3/3, Min. Blocks : 1/1		
VA Box	16	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	17	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	18	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	19	320	Sensitivity : 3/3, Min. Blocks : 1/1		
	20	320	Sensitivity : 3/3, Min. Blocks : 1/1		

- **No.:** Select which cameras to apply Motion Detection to.
- **Zone:** Define the motion detection block.

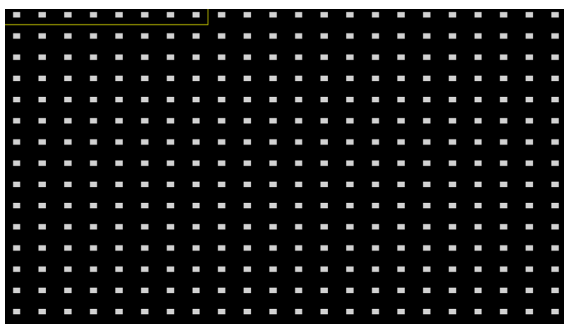

Use the remote control's arrow buttons to move the block selection window up, down, left, and right. The selection window consists of 8 blocks per row. Select/deselect individual blocks using the **Camera** buttons. You can use the mouse to drag the zone and then select, clear, or reverse the selection.

From the zone selection screen, press the  button on the remote control or right-click on the mouse to open up the Zone Setup menu.



- **Select:** Confirm the block selection in the selection window.
- **Clear:** Clear the block selection in the selection window.
- **Reverse:** Clear the blocks selected within the selection window and select all unselected blocks within the selection window.
- **Select All:** Select all blocks.

- **Clear All:** Clear all block selections.
- **Reverse All:** Clear all selected blocks within the screen and select all unselected blocks within the screen.
- **OK:** Save the changes and exit the menu.
- **Cancel:** Exit the menu without saving the changes.

• Setup

Motion - Setup

Sensitivity

Daytime 3

Nighttime 3

Min. Blocks

Daytime 1

Nighttime 1

Ignoring Interval

2 sec.

Daytime Setup

09:00 ~ 18:00

☒ Detecting motion in PTZ movement

OK

Cancel

- **Sensitivity:** Set daytime and nighttime sensitivity settings between 1 (Low) and 5 (High).
- **Min. Blocks:** Motion needs to be detected in more than the specified number of blocks in order to trigger a Motion Detection event. You may select a value between 1 and the number of blocks selected under **Zone** for daytime and nighttime, each.
- **Ignoring Interval:** The system does not produce event log entries or remote notifications for motion detected within a certain period of time after the motion of the camera channels is detected. Set the value between 1 sec and 5 secs or choose **Never**.
- ☒ Ignoring Interval does not affect motion detection recording.
- **Daytime Setup:** Specify when daytime starts and ends. Adjust the time frame in 15-minute increments. Times outside the specified range will be assumed as nighttime by the system.
- **Detecting motion in PTZ movement:** It can be set to detect events during PTZ operation.

- **Condition:** When a specific event occurs, you can configure whether an action will be performed based on the status of other events.

Motion - Condition

☐ Reference Only

Event: **None**

Channel: **None**

OK Cancel

- **Reference Only:** Set the event to be the subject of a reference.
- **Event:** Set the reference event.
- **Channel:** Set the reference channel.
- **Actions:** Specify which actions to take when motion is detected.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to Event or Time & Event mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, HTTP, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.


☒ In order to use the Callback feature, the NVR must be registered on the remote program.

Video-Analytics_Trip Zone

Event	No.	Zone	Setup	Condition	Actions
System Event	1	788	Sensitivity : 3 / 3		
Camera System	2	330	Sensitivity : 3 / 3		
	3	330	Sensitivity : 3 / 3		
	4	330	Sensitivity : 3 / 3		
Video-Analytics	5	576	Sensitivity : 3 / 3		
Motion	6	330	Sensitivity : 3 / 3		
	7	330	Sensitivity : 3 / 3		
TripZone	8	330	Sensitivity : 3 / 3		
	9	330	Sensitivity : 3 / 3		
Tampering	10	330	Sensitivity : 3 / 3		
OLA	11	330	Sensitivity : 3 / 3		
	12	330	Sensitivity : 3 / 3		
Additional Event	13	330	Sensitivity : 3 / 3		
VA Box	14	330	Sensitivity : 3 / 3		
	15	330	Sensitivity : 3 / 3		
	16	330	Sensitivity : 3 / 3		
	17	330	Sensitivity : 3 / 3		
	18	330	Sensitivity : 3 / 3		
	19	330	Sensitivity : 3 / 3		
	20	330	Sensitivity : 3 / 3		


Default Apply OK Cancel

- **No.:** Select which cameras to apply Trip Zone to.
- **Zone:** Define the motion detection block.

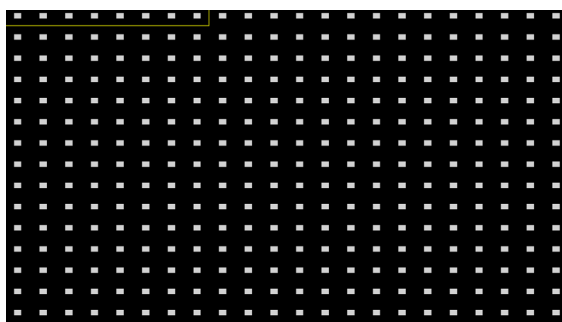


Use the remote control's arrow buttons to move the block selection window up, down, left, and right. The selection window consists of 8 blocks per row. Select/deselect individual blocks using the **Camera** buttons. You can use the mouse to drag the zone and then select, clear, or reverse the selection.

From the zone selection screen, press the  button on the remote control or right-click on the mouse to open up the Zone Setup menu.



- **Select:** Confirm the block selection in the selection window.
- **Clear:** Clear the block selection in the selection window.
- **Reverse:** Clear the blocks selected within the selection window and select all unselected blocks within the selection window.
- **Select All:** Select all blocks.
- **Clear All:** Clear all block selections.
- **Reverse All:** Clear all selected blocks within the screen and select all unselected blocks within the screen.
- **Trip Direction:** Define in which direction the motion has to occur in order for it to be considered an event. Select In for movements from outside the selection area in or Out for movements from inside the selection area out.
- **OK:** Save the changes and exit the menu.
- **Cancel:** Exit the menu without saving the changes.

• Setup

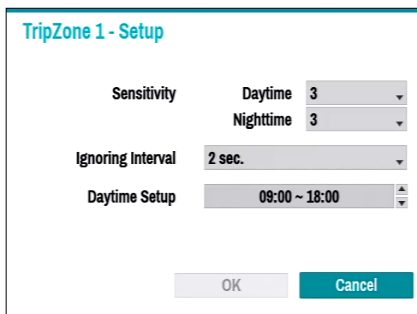


- **Sensitivity:** Set daytime and nighttime sensitivity settings between 1 (Low) and 5 (High).
- **Ignoring Interval:** The system does not produce event log entries or remote notifications for events detected within a certain period of time after Tripzone events of the camera channels are detected. Set a value between 1 sec and 5 secs or choose Never.



Trip Zone Ignoring Time does not affect Trip Zone recording.

- **Daytime Setup:** Specify when daytime starts and ends. Adjust the time frame in 15-minute increments. Times outside the specified range will be assumed as nighttime by the system.
- **Condition:** When a specific event occurs, you can set the condition that determines whether to operate motion according to the status of other events.

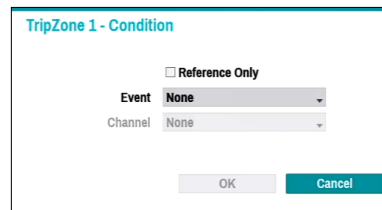

- **Reference Only:** Set the event to be the subject of a reference.
- **Event:** Set the reference event.
- **Channel:** Set the reference channel.
- **Actions:** Specify which actions to take when Trip Zone is detected.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to Event or Time & Event mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, HTTP, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.



In order to use the Callback feature, the NVR must be registered on the remote program.

Video-Analytics_Tampering

Event	No.	Sensitivity	Activation Time	Ignore Condition	Actions
System Event	1	3	01 sec.	Not Use	☑
Camera System	2	3	01 sec.	Not Use	☑
Video-Analytics	3	3	01 sec.	Not Use	☑
Motion	4	3	01 sec.	Not Use	☑
TopZone	5	3	01 sec.	Not Use	☑
Tampering	6	3	01 sec.	Not Use	☑
IDLA	7	3	01 sec.	Not Use	☑
Additional Event	8	3	01 sec.	Not Use	☑
VA Box	9	3	01 sec.	Not Use	☑
	10	3	01 sec.	Not Use	☑
	11	3	01 sec.	Not Use	☑
	12	3	01 sec.	Not Use	☑
	13	3	01 sec.	Not Use	☑
	14	3	01 sec.	Not Use	☑
	15	3	01 sec.	Not Use	☑
	16	3	01 sec.	Not Use	☑
	17	3	01 sec.	Not Use	☑
	18	3	01 sec.	Not Use	☑
	19	3	01 sec.	Not Use	☑
	20	3	01 sec.	Not Use	☑

- **No.:** Select which cameras to apply Tampering to.
- **Sensitivity:** Set to between 1 (Low) and 5 (High).
- **Activation Time:** Specify how long tampering detection needs to last in order for it to be considered an event. Tampering detections that do not last for the specified duration of time will not be considered as events.
- **Ignore Condition**

Tampering 1 - Ignore Condition

☐ Use Ignoring Time 18:00 ~ 09:00

OK Cancel

- **Use Ignoring Time:** Select **Time Setup** to specify the tampering detection ignore time of camera channels. Tampering detection will be disabled during the specified time frame.
- **Actions:** Specify which actions to take when Tampering is detected.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to **Event** or **Time & Event** mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, HTTP, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occur.



In order to use the Callback feature, the NVR must be registered on the remote program.

IDLA (IDIS Deep Learning Analytics)

This is a list of events that occur during AI video analysis.

Event	List of events that occur during AI video analysis
System Event	Object Detection Event that occurs when an object (human, vehicle) is detected within the defined area.
Camera System	Intrusion Event that occurs when an object (human, vehicle) enters or leaves the defined area in the direction set by the intrusion direction option (In, Out, In&Out).
Video-Analytics	Loitering Event that occurs when an object (human, vehicle) stays within the defined area longer than the set time.
Setup	Line Crossing Event that occurs when an object (human, vehicle) crosses the defined line in the direction set by the intrusion direction option (In, Out, In&Out).
Additional Event	Face Detection Event that occurs when a human face is detected within the defined area.
VA Box	

IDLA_Setup

IDLA events can be added via the IDLA settings. However, the event must be enabled in the camera's video analytics engine.

Event	Settings	Actions
System Event		
Camera System		
Video-Analytics		
IDLA		
Setup		
Additional Event		
VA Box		

This event requires Time Lapse or Pre-Event recording schedule setup. Otherwise, the video may not be displayed when searching the event log.

This event requires VA Engineer (Video) setup.

Apply OK Cancel

- **Event:** Displays the type of the added event.
- **Settings:** Configure conditions to ignore events when they occur, and set PTZ AI tracking and tracking areas.
- **Actions:** Specify which actions to take when the function is detected.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to **Event** or **Time & Event** mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
- **Event Monitoring:** Selects the cameras to monitor when an event occurs.




- In order to use the Callback feature, the NVR must be registered on the remote program.
- When the analytic type is set to Object Detection in the **Device - VA Box- Setup** tab, **Use Ignoring Time** option is not displayed on the screen.
- The PTZ AI tracking function is displayed only on AI PTZ cameras - Setup.
- To use the IDLA function, you need to set up a time-lapse or pre-event recording schedule in advance. Otherwise, the video may not be displayed when searching the event log.

Object Detection


Select the + button at the bottom left of the IDLA Setup window to add an object detection event.

Click the Settings tab in the IDLA Setup window to configure the object detection event.

- **Settings:** When an event occurs, set the conditions to ignore the event and whether to use PTZ AI Tracking.

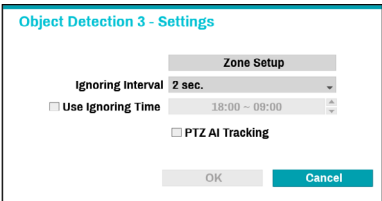


- **Zone Setup:** Set a zone to be detected as a polygon.

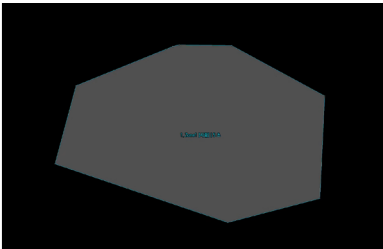

You can set a zone using the mouse. The zone is displayed in transparent. Drag and drop the vertex to modify the zone.

Right-click on the zone setup screen to bring up the Object Detection Menu.



- **Zone Title:** Select the zone to change the settings. When selecting the zone, a check mark appears to the left.
- **Clear:** Clear the selected zone.
- **Undo:** Remove the last point of a line.
- **Edit Name:** Change the name of the zone.
- **Object:** Select an object to detect.
- **Add:** Add a zone.
- **Delete:** Delete the selected zone.
- **Delete All:** Delete all zones.
- **Mode:** Display the modes supported by the camera.
- **Preset:** Select an AI PTZ camera preset.
- **Save:** Save the changes and exit the menu.
- **Cancel :** Exit the setup screen without saving the changes.



Modes and preset functions are supported only by AI PTZ cameras.

- **Ignoring Interval:** The system does not produce event log entries or issue remote notifications regarding event for the specified time after the initial event was detected. Set the value between 1 sec and 5 secs or choose Never. **Ignore Condition** does not affect Object Detection recording.
- **Use Ignoring Time:** The object detection function will be disabled during the specified time.
- **PTZ AI Tracking:** Enable PTZ AI tracking function.


Intrusion

Select the + button at the bottom left of the IDLA Setup window to add an intrusion event.

Click the Settings tab in the IDLA Setup window to configure the intrusion event.


- **Settings** When an event occurs, set the conditions to ignore the event and whether to use PTZ AI Tracking.

- **Zone Setup:** Set a zone to be detected as a polygon.

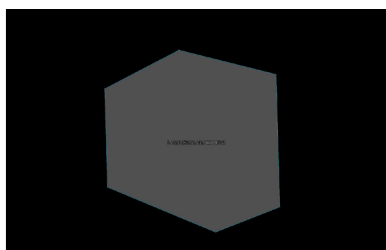

You can set a zone using the mouse. The zone is displayed in transparent. Drag and drop the vertex to modify the zone.

Right-click on the zone setup screen to bring up the Intrusion Menu.



- **Zone Title:** Select the zone to change the settings. When selecting the zone, a check mark appears to the left.
- **Clear:** Clear the selected zone.
- **Undo:** Remove the last point of a line.
- **Edit Name:** Change the name of the zone.

- **Object:** Select an object to detect.
- **Direction:** Select the direction of the object to detect.
- **Add:** Add a zone.
- **Delete:** Delete the selected zone.
- **Delete All:** Delete all zones.
- **Mode:** Display the modes supported by the camera.
- **Preset:** Select an AI PTZ camera preset.
- **Save:** Save the changes and exit the menu.
- **Cancel :** Exit the setup screen without saving the changes.

☒ Modes and preset functions are supported only by AI PTZ cameras.

- **Ignoring Interval:** The system does not produce event log entries or issue remote notifications regarding event for the specified time after the initial event was detected. Set the value between 1 sec and 5 secs or choose Never. **Ignore Condition** does not affect Intrusion recording.
- **Use Ignoring Time:** The intrusion function will be disabled during the specified time.
- **PTZ AI Tracking:** Enable PTZ AI tracking function.


Loitering

Select the + button at the bottom left of the IDLA Setup window to add a loitering event.

Click the Settings tab in the IDLA Setup window to configure the loitering event.


- **Settings:** When an event occurs, set the conditions to ignore the event and whether to use PTZ AI Tracking.

- **Zone Setup:** Set a zone to be detected as a polygon.

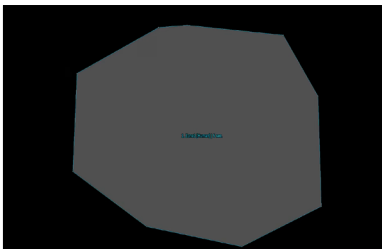

You can set a zone using the mouse. The zone is displayed in transparent. Drag and drop the vertex to modify the zone.

Right-click on the zone setup screen to bring up the Intrusion Menu.

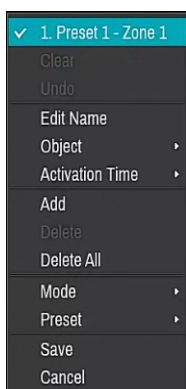

- **Zone Title:** Select the zone to change the settings. When selecting the zone, a check mark appears to the left.
- **Clear:** Clear the selected zone.
- **Undo:** Remove the last point of a line.
- **Edit Name:** Change the name of the zone.

- **Object:** Select an object to detect.
- **Activation Time:** Set the time when the function is activated.
- **Add:** Add a zone.
- **Delete:** Delete the selected zone.
- **Delete All:** Delete all zones.
- **Mode:** Display the modes supported by the camera.
- **Preset:** Select an AI PTZ camera preset.
- **Save:** Save the changes and exit the menu.
- **Cancel :** Exit the setup screen without saving the changes.




- Modes and preset functions are supported only by AI PTZ cameras.
- The activation time may vary depending on the product.
- **Ignoring Interval:** The system does not produce event log entries or issue remote notifications regarding event for the specified time after the initial event was detected. Set the value between 1 sec and 5 secs or choose Never. **Ignore Condition** does not affect Loitering recording.
- **Use Ignoring Time:** The loitering function will be disabled during the specified time.
- **PTZ AI Tracking:** Enable PTZ AI tracking function.

Line Crossing

Select the + button at the bottom left of the IDLA Setup window to add a line crossing event.

Click the Settings tab in the IDLA Setup window to configure the line crossing event.


- **Settings** When an event occurs, set the conditions to ignore the event and whether to use PTZ AI Tracking.

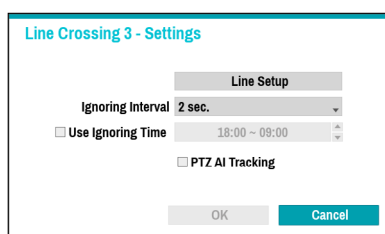

The 'Line Crossing 3 - Settings' dialog box contains the following elements:


- Line Setup** (Section Header)
- Ignoring Interval**: Set to '2 sec.' with a dropdown arrow.
- Use Ignoring Time**: A checkbox that is currently unchecked, followed by a time range '18:00 ~ 09:00' and a dropdown arrow.
- PTZ AI Tracking**: A checkbox that is currently unchecked.
- Buttons**: 'OK' and 'Cancel' buttons at the bottom.

- **Line Setup**: Set a line to be detected.

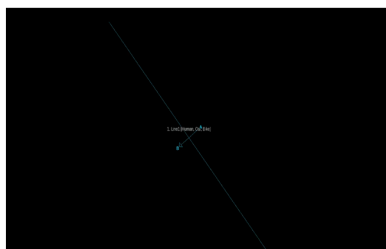

You can set the line using the mouse. The line is displayed in transparent.

Right-click on the line setup screen to bring up the Intrusion Menu.

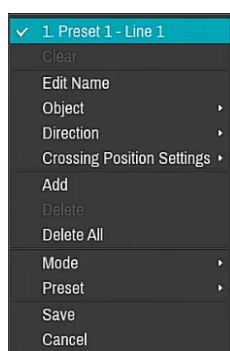

- **Line Title**: Select the line to change the settings. When selecting the line, a check mark appears to the left.
- **Clear**: Clear the selected line.
- **Edit Name**: Change the name of the line.
- **Object**: Select an object to detect.

- **Direction**: Select the direction of the object to detect.
- **Crossing Position Settings**: Set the crossing position of the object.
- **Add**: Add a line.
- **Delete**: Delete the selected line.
- **Delete All**: Delete all lines.
- **Mode**: Display the modes supported by the camera.
- **Preset**: Select an AI PTZ camera preset.
- **Save**: Save the changes and exit the menu.
- **Cancel**: Exit the setup screen without saving the changes.

☒ Modes and preset functions are supported only by AI PTZ cameras.


- **Ignoring Interval**: The system does not produce event log entries or issue remote notifications regarding event for the specified time after the initial event was detected. Set the value between 1 sec and 5 secs or choose Never. **Ignore Condition** does not affect Line Crossing recording.
- **Use Ignoring Time**: The line crossing function will be disabled during the specified time.
- **PTZ AI Tracking**: Enable PTZ AI tracking function.

Face Detection


Select the + button at the bottom left of the IDLA Setup window to add a face detection event.

Click the Settings tab in the IDLA Setup window to configure the face detection event.

- **Settings** When an event occurs, set the conditions to ignore the event and whether to use PTZ AI Tracking.

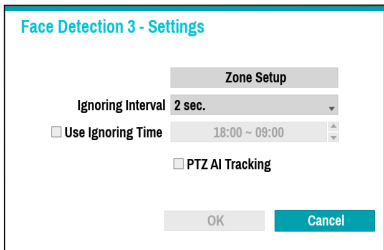


- **Zone Setup:** Set the zone to be detected as a polygon.

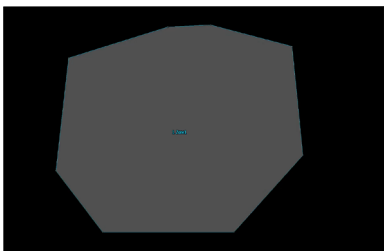

You can set a zone using the mouse. The zone is displayed in transparent. Drag and drop the vertex to modify the zone.

Right-click on the zone setup screen to bring up the Intrusion Menu.



- **Zone Title:** Select the zone to change the settings. When selecting the zone, a check mark appears to the left.
- **Clear:** Clear the selected zone.
- **Undo:** Remove the last point of a line.
- **Edit Name:** Change the name of the zone.
- **Add:** Add a zone.


- **Delete All:** Delete all zones.
- **Mode:** Display the modes supported by the camera.
- **Preset:** Select an AI PTZ camera preset.
- **Save:** Save the changes and exit the menu.
- **Cancel :** Exit the setup screen without saving the changes.

☒ Modes and preset functions are supported only by AI PTZ cameras.

- **Ignoring Interval:** The system does not produce event log entries or issue remote notifications regarding event for the specified time after the initial event was detected. Set the value between 1 sec and 5 secs or choose Never. **Ignore Condition** does not affect Face Detection recording.
- **Use Ignoring Time:** The face detection function will be disabled during the specified time.
- **PTZ AI Tracking:** Enable PTZ AI tracking function.

Additional Event


A list of events that occur in the camera, system and other device.

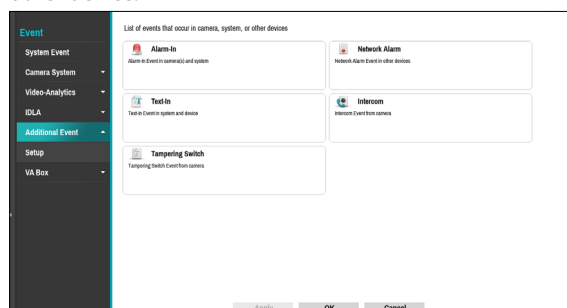

- Intercom and Tampering Switch actions are supported only on camera models with intercom functionality.
- In order to use the Callback feature, the NVR must be registered on the remote program.
- Select **Panic Record** to specify which alarm-in channels to use. Panic Record commences when the corresponding alarm-in occurs and terminates when the alarm-in is deactivated.


Alarm-In

When you select the + button at the bottom left of the Additional Event_Setup window, the following window is displayed.



- **Event:** Select the Alarm-In event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the Additional Event_Setup window to configure the alarm-in event.

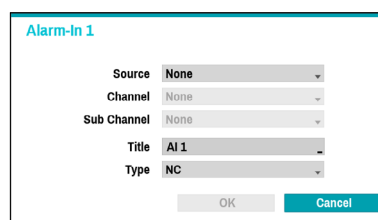


- **Source:** Specify the device to use for the alarm-in event.
- **Channel:** Set the channel of the source you set.
- **Sub Channel:** Set the sub channel of the source you set.
- **Title:** Use the virtual keyboard to enter titles.
- **Type:** Change the alarm-in type.

Click the Condition tab in the Additional Event_Setup window to configure the alarm-in event.

- **Condition:** When a specific event occurs, you can set the condition that determines whether to operate motion according to the status of other events.

Additional Event_Setup

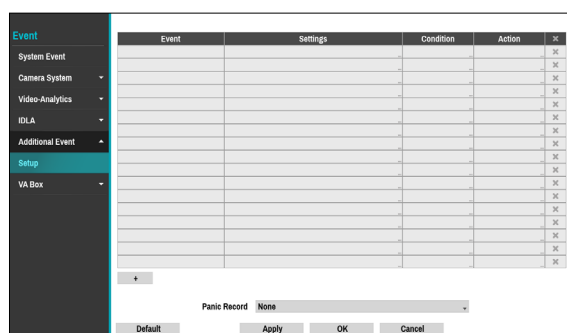

- **Event:** Displays the added events.
- **Settings:** Displays the event settings window.
- **Condition:** When a specific event occurs, you can configure whether an action will be performed based on the status of other events.
- **Actions:** Specify which actions to take when the function is detected.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to **Event** or **Time & Event** mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.

Alarm-In - Condition

☐ Reference Only

Event: None

Channel: None

OK Cancel

- **Reference Only:** Set the event to be the subject of a reference.
- **Event:** Set the reference event.
- **Channel:** Set the reference channel.

Network Alarm

When you select the + button at the bottom left of the Additional Event_Setup window, the following window is displayed.

Add

Event: Alarm-In

Channel: 1 ☐ Accept All

OK Cancel

- **Event:** Select the Network Alarm event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the Additional Event_Setup window to configure the network alarm event.

- **Settings:** Use the virtual keyboard to enter titles.

Click the Condition tab in the Additional Event_Setup window.

- **Condition:** When a specific event occurs, you can set the condition that determines whether to operate motion according to the status of other events.

Network Alarm - Condition

☐ Reference Only

Event: None

Channel: None

OK Cancel

- **Reference Only:** Set the event to be the subject of a reference.
- **Event:** Set the reference event.
- **Channel:** Set the reference channel.

Text-In

When you select the + button at the bottom left of the Additional Event_Setup window, the following window is displayed.

Add

Event: Alarm-In

Channel: 1 ☐ Accept All

OK Cancel

- **Event:** Select the Text-In event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the Additional Event_Setup window to configure the text-in event.

- **Setup:** Configure text-in devices.

Text-In 1

Title: Text-In 1

Source: None

Port: None

Text-In Product: Generic Text

Transaction Start: Any Character

Transaction End: 0 more line(s)

Line Delimiter: -

Ignore String: -

☐ Case Sensitive

Time Out: 10 min. 00 sec.

OK Cancel

- ☒ An influx of large amounts of text-in data from multiple channels can hinder system performance.

- **Title:** Designate a name for the text-in device.
- **Source:** Set the connected device to use Text-in events.
- **Port:** Indicates text-in device connected in the Connectors tab.
- **Text-In Product:** The setup window is updated so that the portion below the port setting matches the corresponding text-in device. Displayed screenshot illustrates Generic Text settings.
- **Transaction Start:** Once **Transaction Start** has been designated, the system will recognize the specified string as the beginning of a transaction. You can choose the Any Character setting. Under this setting, any character will trigger the system into recognizing the start of a new transaction.
- **Transaction End:** Once **Transaction End** has been designated, the system will recognize the specified string as the end of a transaction. Select **0 more**

line(s) next to Transaction End and specify a value between 1 and 10. The system will recognize the specified Transaction End string plus the number of lines as being the end of a transaction.

- **Line Delimiter:** Designate a string to mark the end of a line. You can enter control strings by selecting  and then entering ^, followed by a letter. For example, Carriage Return is ^M and Line Feed (new line) is ^J.
- **Ignore String:** Specify a string to ignore from transaction records.
- **Case Sensitive:** Ignores case in strings designated under **Transaction Start**, **Transaction End**, **Line Delimiter**, and **Ignore String**.



Case Sensitive does not apply to control strings.

- **Time Out:** Once **Time Out** has been enabled, the system will assume the end of a transaction if no new string is entered within the specified duration of time. Select between 5 secs and 15 mins.




If using a USB-serial port, the Text-In feature may malfunction if the USB cable is removed while the system is in operation.



In order to use the Callback feature, the NVR must be registered on the remote program.


Intercom

When you select the + button at the bottom left of the Additional Event_Setup window, the following window is displayed.

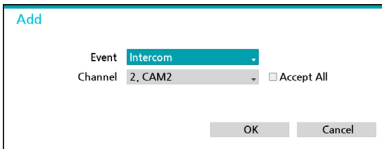

- **Event:** Select the Intercom event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the Additional Event_Setup window to configure the Intercom event.

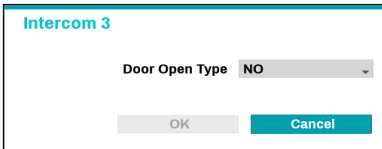


- **Door Open Type:** Select the Alarm-In type.

Tampering Switch

With tampering switch event enabled, when the intercom body is physically separated from the installation plate, it will be assumed as an event.

VA Box

A list of events that occur on VA Box.

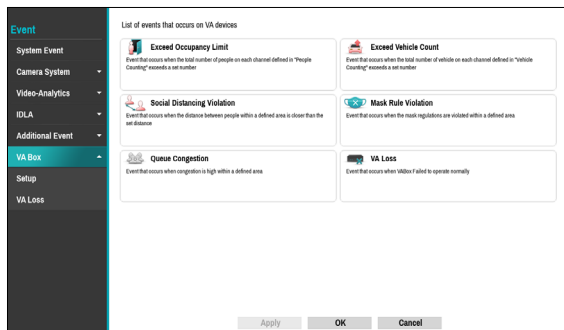

VA Box_Setup

You can add a specific event through this setup. However, the event must be enabled in the VA BOX setup under the Device tab.



- **Settings:** Configure the event.
- **Actions:** Specify which actions to take when an event occurs.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to Event or Time & Event mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.




In order to use the Callback feature, the NVR must be registered on the remote program.

Exceed Occupancy Limit

Event occurs when the In/Out coefficient is detected and the coefficient of the relevant VA Box channel is added in real time to exceed the specified conditions.


When you select the + button at the bottom left of the VA Box_Setup window, the following window is displayed.

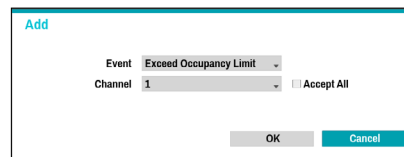

- **Event:** Select the Exceed Occupancy Limit event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the VA Box_Setup window to configure the Exceed Occupancy Limit event.

- **Exceed Occupancy Limit - Setup :** Set the Exceed Occupancy Limit event.

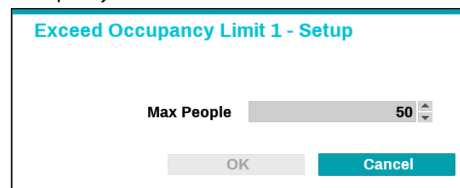

- **Max People :** An event occurs when a person in the area in excess of the number of people set by a person.



To use the Exceed Occupancy Limit function, set DV-1304's People Counting with Main on the channel.

Social Distancing Violation

Event occurs when the distance is less than the interval that is set by estimating the distance between people by human detection.

When you select the + button at the bottom left of the VA Box_Setup window, the following window is displayed.

- **Event:** Select the Social Distancing Violation event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the VA Box_Setup window to configure the Social Distancing Violation event.

- **Setup :** Set the interval between people.

- **Sensitivity :** The higher the sensitivity value, the greater the probability of being detected as an event, if the distance between people is equal to the step relative value of the distance between people.
- **Ignoring Interval :** Event log and remote notification are not performed for Social Distancing Violation events detected within a certain period of time after the event was detected.

☒ To use the Social Distancing Violation, the Social Distancing Violation must be set on that channel.

Mask Rule Violation

The camera detects a face and events occur according to Mask Rule Violation settings.

When you select the + button at the bottom left of the VA Box_Setup window, the following window is displayed.

- **Event:** Select the Mask Rule Violation event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the VA Box_Setup window to configure the Mask Rule Violation event.

- **Mask Rule Violation - Setup :** Check the rules for wearing a mask on a person's face and set the event to occur when a violation occurs.

- **Detection Type :** Set the Non-Mask / Mask Rule.
- **Ignoring Interval :** Event log and remote notification are not performed for mask rule violation events detected within a certain period of time after the event was detected.

☒ To use the mask rule violation, the mask rule violation must be set on that channel.

Queue Congestion

The camera detects queue congestion and events occur according to Queue Congestion settings.

When you select the + button at the bottom left of the VA Box_Setup window, the following window is displayed.

- **Event:** Select the Queue Congestion event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the VA Box_Setup window to configure the Queue Congestion event.

- **Queue Congestion - Setup :** Set congestion level to issue an alert by detecting a queue in real time.

- **High Congestion :** Set high congestion level for each selection area. You can check the information analyzed on the basis of exceeding the set value on remote program.
- **Mid Congestion :** Set the mid congestion level for each selection area. You can check the information analyzed on the basis of exceeding the set value on remote program.
- **Min. Dwell Time :** Sets the minimum dwell time required for an event to occur in a designated area. An event will only be triggered when both the specified number of people and the minimum dwell time are met. Brief stops or transient movements will not be considered in the event-triggering conditions

- ☒ The event occurs only when **High Conestion** function is set.

Exceed Vehicle Count

The system detects vehicles and counts their In/Out numbers. An event is triggered when the total count, calculated in real time by summing the counts of the related VA BOX channels, exceeds the defined condition.

When you select the + button at the bottom left of the VA Box_Setup window, the following window is displayed.

- **Event:** Select the Exceed Vehicle Count event.
- **Channel:** Select the event channel to add.
- **Accept All:** Select all channels.

Click the Settings tab in the VA Box_Setup window to configure the Exceed Vehicle Count event.


- **Exceed Vehicle Count - Setup :** Set the Exceed Vehicle Count event.

- **Max number of Vehicles:** An event is triggered when the number of vehicles in the area exceeds the configured number.

- ☒ To use the Exceed Vehicle Count function, set DV-1304's Exceed Vehicle Count with Main on the channel.

VA Box_VA Loss

This event occurs when VA Box does not operate normally.

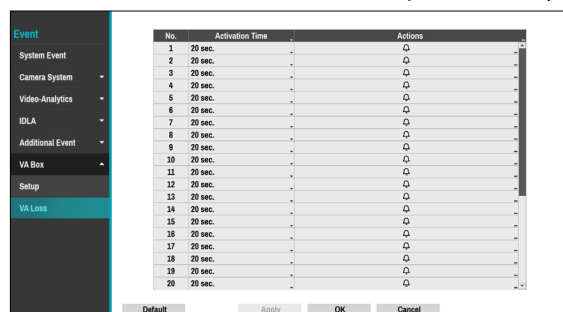

- **Activation Time:** Specify how long VA loss has to last in order for it to be considered as an event. When the VA loss is not detected for the specified duration of time, it will not be considered as an event.
- **Actions:** Specify which actions to take when a VA loss event occurs.
 - **Record:** Specify which cameras to begin linked recording on when an event occurs. If the schedule is set to **Event** or **Time & Event** mode, the selected cameras will begin linked recording when an event occurs.
 - **Alarm-Out:** Designate event-triggered alarm-out channels (each for the NVR and camera) and beeps.
 - **Notify:** Configure to be notified of events by Mail, LAN1 through 5, Push, FTP, and/or Alert Window.
 - **PTZ:** Moves the PTZ camera to a specific preset position when an event occurs.
 - **Event Monitoring:** Selects the cameras to monitor when an event occurs.




In order to use the Callback feature, the NVR must be registered on the remote program..

Device Setup


Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

Alarm-Out


A list of events for setting up Alarm-Out.

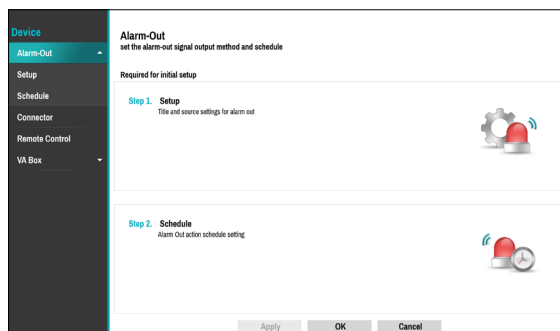

Alarm-Out_Setup

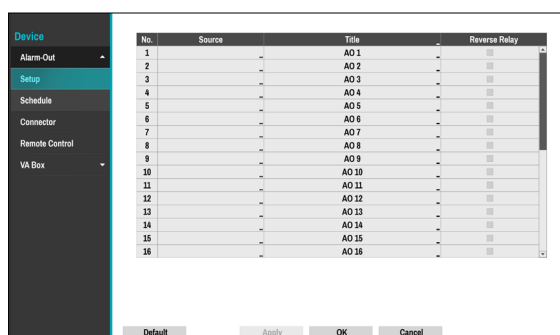

- **Source:** Specify the device to use for Alarm-In event.

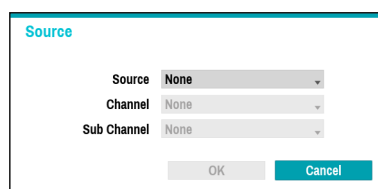

- **Channel:** Set the channel of the source you set.
- **Sub Channel:** Set the sub channel of the source you set.

- **Title:** Designate a name for the alarm-out event
- **Reverse Relay:** Reverse the alarm-out type of the device you set at the source.

Alarm-Out_Schedule

[illegible]

Click the + icon at the bottom left corner of the screen to add a schedule.

Select icon to delete the schedule.

- **Dwell Time:** Select a value between 5 secs and 15 mins as the alarm-out duration.
- **Day:** Apply different schedules for different Days of the week.
- **Range:** Change the schedule time frame.
- **Mode:** Select **Event**, **On**, or **Off**.

Event	Generates an alarm-out when an event occurs.
On	Alarm-out is always on.
Off	Alarm-out is always off.

- **Channels:** Configure alarm-out port and beep settings.

Connector

[illegible]

Click the + icon at the bottom left corner of the screen to add a connection device.



Connection (Port) 1

Device **None**

Port **None**

Port 1024 (1024 ~ 85535)

OK Cancel

- **Device:** Select a connection device supported by the NVR.
- **Port:** Select the ports supported by the selected device. Depending on the port, you can set the port speed, data, stop, parity value or LAN port.

- If the same LAN port is being used, a warning window appears: "Same Port Number".
- When using a USB-serial port, Text-in function may malfunction if the USB cable is removed while the system is running.


Remote Control



- **Port:** Indicates the remote control device connected in the previous Connectors tab.
- **Remote Control Product:** Select remote control products.

VA Box


By analyzing camera images, you can check real-time analysis results from a client program such as the IDIS Center.

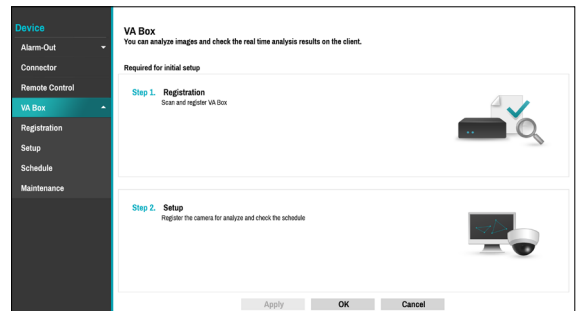

VA Box can only analyze the video from the camera using H.264 and H.265.

VA Box_Registration

You can register VA Box at remote locales.

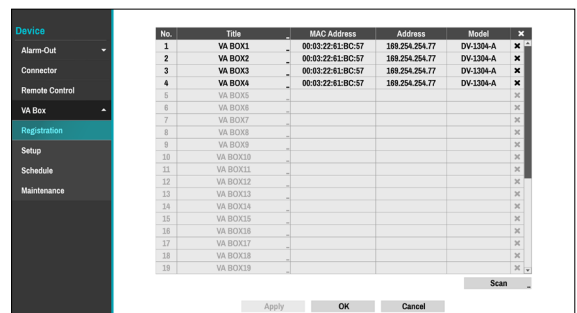

- **Title:** Edit the VA Box's name.
- **MAC Address:** Displays the VA Box's MAC address registered to the NVR.
- **Address:** Displays the VA Box's IP address registered to the NVR.
- **Model:** Indicates the VA Box's model.
- **Scan:** Select to scan and register the device connected to the NVR.

Device Scan

Scan the device under **VA Box- Registration - Scan.**

No.	MAC Address	Address	Model	Registered Device MAC Address	Status
1	00:02:22:81:9C:57	189.254.254.77	DV-1304-A(1)		Registered
2	00:02:22:81:9C:57	189.254.254.77	DV-1304-A(2)		Registered
3	00:02:22:81:9C:57	189.254.254.77	DV-1304-A(3)		Registered
4	00:02:22:81:9C:57	189.254.254.77	DV-1304-A(4)		Registered

- **No.:** Select the number of the registered VA Box and click the **Add Box** button to register the camera.
- **MAC Address:** Displays the scanned device's MAC address.
- **Address:** Displays the scanned device's IP address.
- **Model:** Indicates the device model.
- **Registered Device MAC Address:** Displays the MAC address of the NVR to have registered VA Box.
- **Status:** "Registered" indicates the VA Box is registered to the NVR and "Not registered" indicates the VA Box is not registered to the NVR.

VA Box_Setup

Configure VA Box-related settings.


No.	Title	Model	Camera	Analytic Type	Configuration	Reset
1	VA BOX1	DV-1304-A	2. CAM2	Object Detection		Reset
2	VA BOX2	DV-1304-A	3. CAM3	Intrusion		
3	VA BOX3	DV-1304-A	4. CAM4	Loitering		
4	VA BOX4	DV-1304-A	6. CAM6	Line Crossing		
5	VA BOX5	None	None	None		
6	VA BOX6	None	None	None		
7	VA BOX7	None	None	None		
8	VA BOX8	None	None	None		
9	VA BOX9	None	None	None		
10	VA BOX10	None	None	None		
11	VA BOX11	None	None	None		
12	VA BOX12	None	None	None		
13	VA BOX13	None	None	None		
14	VA BOX14	None	None	None		
15	VA BOX15	None	None	None		
16	VA BOX16	None	None	None		
17	VA BOX17	None	None	None		
18	VA BOX18	None	None	None		
19	VA BOX19	None	None	None		
20	VA BOX20	None	None	None		

- **Title:** Displays the name of a VA Box.
- **Model:** Indicates the VA Box's model.
 - ☒ The video analytics may not be supported depending on the model.
- **Camera:** Select the camera to analyze the video. Only one camera can be set for each VA Box channel.
- **Set up:** The settings appear differently depending on the Analytic Type. Refer to the setting items for each Analytic Type
- **Reset:** Resets the port or VA Box.
 - **PoE Reset:** Control the PoE Switch's port. This option is available when connecting to Video In/ PoE port or using a DirectIP PoE Switch (optional). Select PoE Reset to reboot VA Box.
 - **Soft Reset:** Reboots VA Box.
- ☒ Use a client program such as IDIS Center to check the analysis results.
- **Analytic Type:**
 - **DV-1304 :** Select one among People Counting, **Vehicle Counting**, HeatMap, Social Distancing Violation, Mask Rule Violation and Queue Monitoring.
 - **DV-1304-A :** Select one among Object Detection, Intrusion, Loitering, Line Crossing and Face Detection.

<Types of Video Analytics >

People Counting

Count the number of people passing through the line on the live screen.

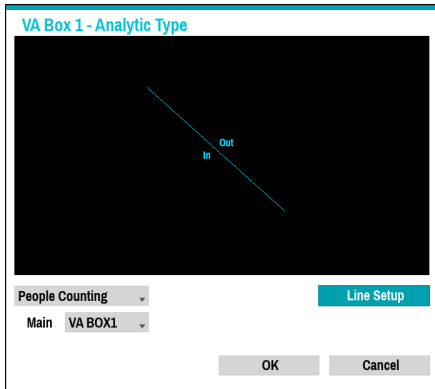

Right-click on the Line Setup screen to bring up the People Counting Menu.


- **Main** : Aggregate the total number of people by sending the counts to the desired channel. A channel designated as Main can use the Exceed Occupancy Limit event.
- **Boundary**: Set a virtual border to count the floating population.



Depending on the location of the boundary, the number of people may be incorrectly calculated.

- **Save**: Save the changes and exit the menu.
- **Cancel** : Exit the setup screen without saving the changes.


- **Configuration** : Set the environment of people counting. Select People Counting as the video analysis type, and then select Settings.

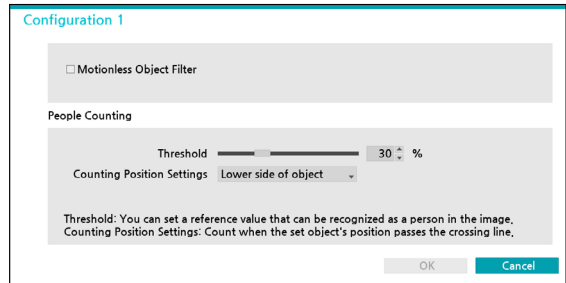

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set the reference value that can be recognized as a person in the image.
- **Counting position setting** : Set the position of the reference point of a person to count the number of people passing through the boundary.

Vehicle Counting

Count the number of vehicles passing through the line on the live screen.

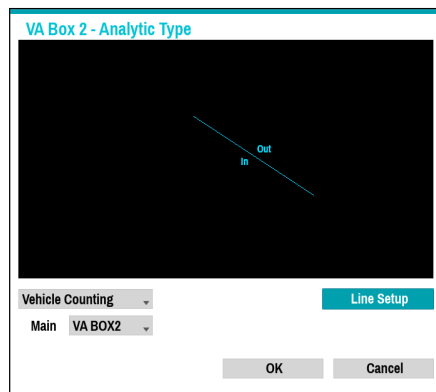

Right-click on the Line Setup screen to bring up the Vehicle Counting menu.


- **Main** : Aggregate the total number of vehicles by sending the counts to the desired channel. A channel designated as Main can use the Vehicle Counting event.
- **Boundary**: Set a virtual border to count the number of passing vehicles.



Depending on the location of the boundary, the number of passing vehicles may be incorrectly calculated.

- **Save**: Save the changes and exit the menu.


- **Cancel** : Exit the setup screen without saving the changes.
- **Configuration** : Set the environment of Vehicle Counting. Select Vehicle Counting as the video analysis type, and then select Settings.

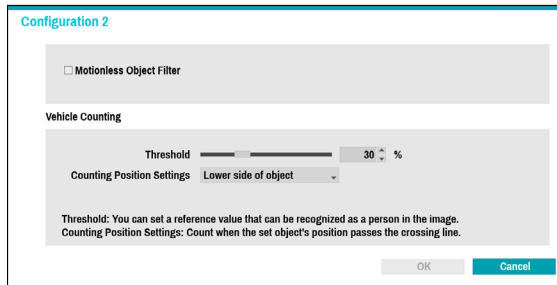

- **Motionless Object Filter** : Detect a specific fixed object in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set the reference value that can be recognized as a vehicle in the image.
- **Counting position setting**: Set the position of the reference point of a vehicle to count the number of vehicles passing through the boundary.

HeatMap

Analyze the movement frequency in the zone of the live screen. Use the left mouse button to define the zone. Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.

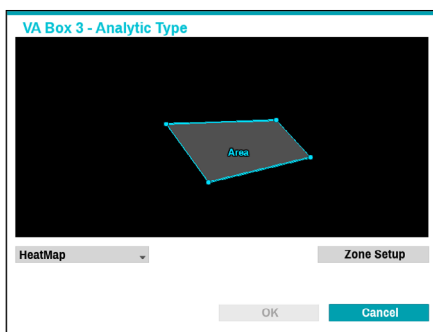


- ☑ Lines cannot cross when setting the zone.

Right-click on the zone setup screen to bring up the HeatMap Menu.

- **Undo** : Return to the previously set zone.
- **Save**: Save the changes and exit the menu.
- **Cancel** : Exit the setup screen without saving the changes.


- **Configuration** : Set the environment of HeatMap. Select HeatMap as the video analysis type, and then select Settings.

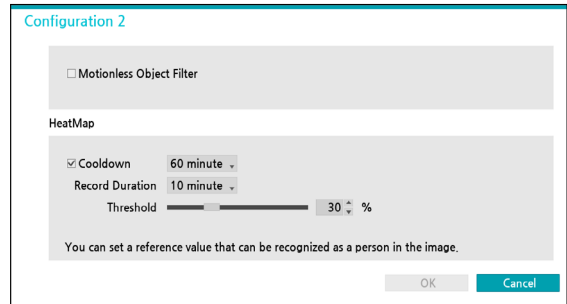

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Cooldown** : Indicate on the screen the HeatMap information recorded before **Cooldown**.
- **Record Duration** : Set the recording interval to save the HeatMap data.
- **Threshold** : Set the reference value that can be recognized as a person in the image.

Social Distancing Violation

Violation event occurs when the distance between detected people in the set area of the image is estimated and analyzed and the distance is less than the set interval. Use the left mouse button to define the zone. Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.

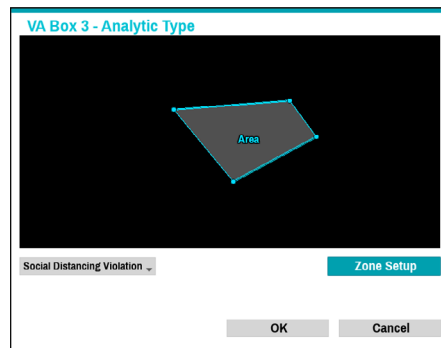


- ☑ Lines cannot cross when setting the zone.

Right-click on the zone setup screen to bring up the Social Distancing Violation Menu.

- **Undo** : Return to the previously set zone.
- **Save**: Save the changes and exit the menu.

– **Cancel** : Exit the setup screen without saving the changes.

- **Configuration** : Set the environment of Social Distancing Violation. Select Social Distancing Violation as the video analysis type, and then select Settings.

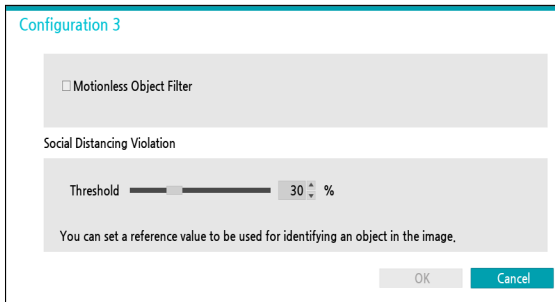


- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set the reference value that can be recognized as a person in the image.

Mask Rule Violation

The camera detects the face and events occur according to the mask-wearing rule setting on the face. Use the left mouse button to define the zone.

Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.

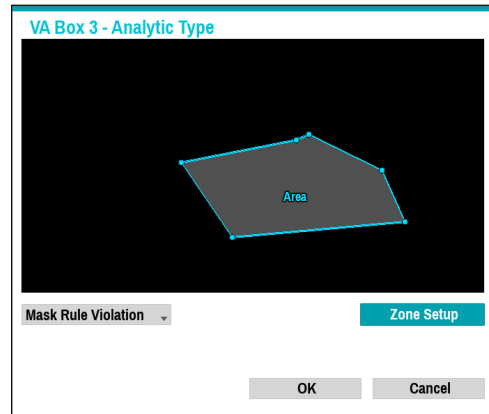


Lines cannot cross when setting the zone.

Right-click on the zone setup screen to bring up the Mask Violation Menu.

- **Undo** : Return to the previously set zone.
- **Save** : Save the changes and exit the menu.
- **Cancel** : Exit the setup screen without saving the changes.


- **Configuration** : Set the environment of Mask Rule Violation. Select Mask Rule Violation as the video analysis type, and then select Settings.

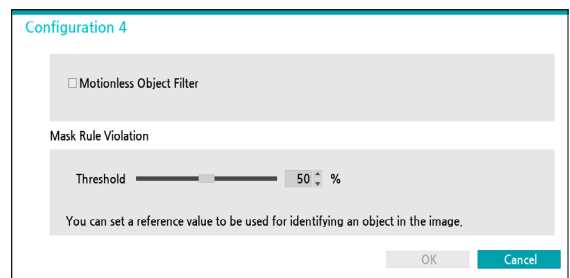

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set the reference value that can be recognized as a person in the image.

Queue Monitoring

Congestion for each zone is determined by monitoring people in the queue in the zone of the live screen. Use the left mouse button to define the zone. Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.

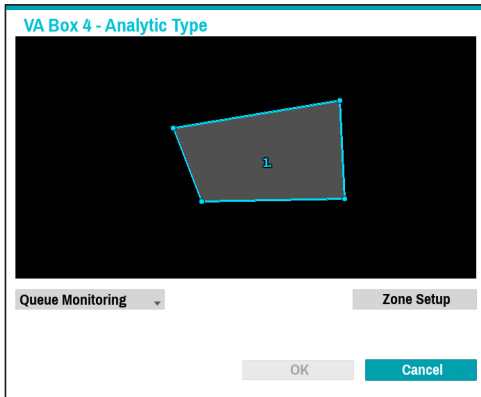


Lines cannot cross when setting the zone.

Right-click on the zone setup screen to bring up the Queue Monitoring Menu.

- **Delete** : Delete the zone selected in the image.
- **Undo** : Return to the previously set zone.
- **Edit name**: Set the name of the zone.
- **Save** : Save the changes and exit the menu.
- **Cancel** : Exit the setup screen without saving the changes.

- **Configuration** : Set the environment of Queue Monitoring. Select Queue Monitoring as the video analysis type, and then select Settings.

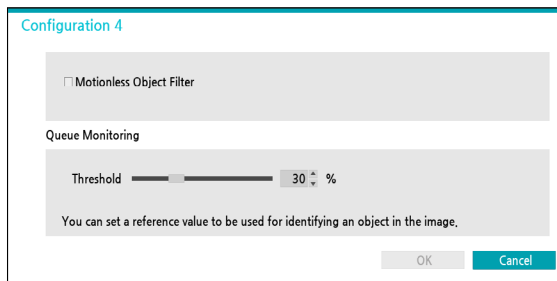

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set the reference value that can be recognized as a person in the image.


Object Detection

Object Detection technology detects an object (human, vehicle) in the zone set by the user. Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.



Right-click on the zone setup screen to bring up the Object Detection Menu.

- **Configuration** : Set the environment of Object Detection. Select Object Detection as the video analysis type, and then select Settings.

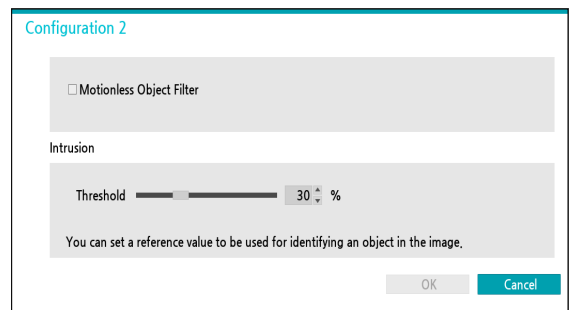


- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set a reference value that can be recognized as an object in the image.

Intrusion


Set direction options (In, Out, In/Out) to detect an object (human, vehicle) entering or leaving the zone.

Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.

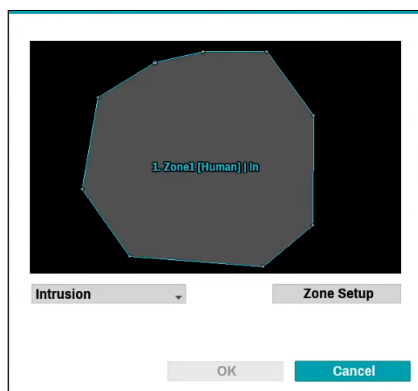

Right-click on the zone setup screen to bring up the Intrusion Menu.

- **Configuration** : Set the environment of Intrusion.
Select Intrusion as the video analysis type, and then select Settings.

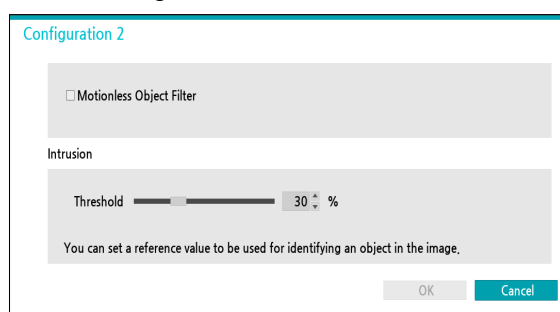


- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set a reference value that can be recognized as an object in the image.

Loitering


Loitering detection technology detects an object (human, vehicle) that stays longer than the set time.

Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone.

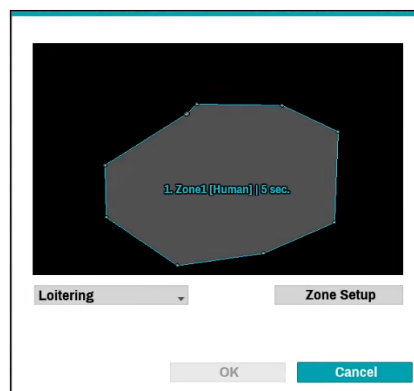

Right-click on the zone setup screen to bring up the Loitering Menu.


- **Configuration** : Set the environment of Loitering .
Select Loitering as the video analysis type, and then select Settings.

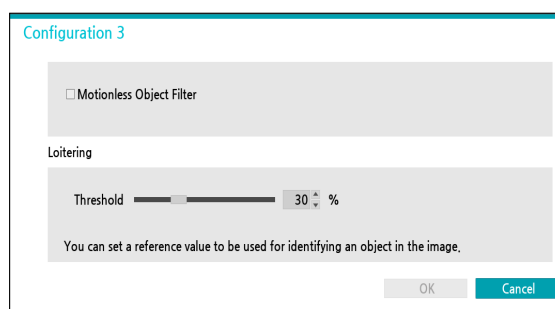

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set a reference value that can be recognized as an object in the image.


Line Crossing

Set direction options (In, Out, In/Out) to detect an object (human, vehicle) which crosses a pre-defined line. Click on the left mouse button to reset the line.

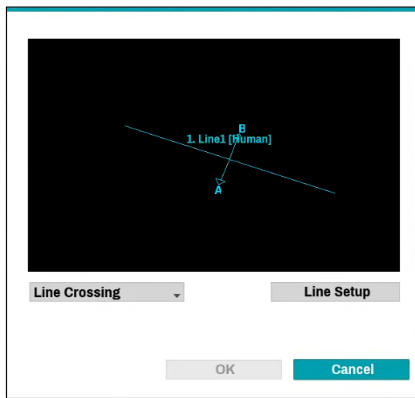

Right-click on the line setup screen to bring up the Line Crossing Menu.


- **Configuration** : Set the environment of Line Crossing. Select Line Crossing as the video analysis type, and then select Settings.

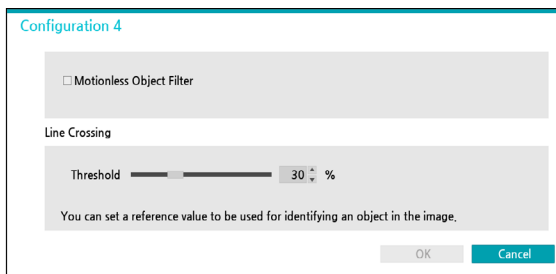

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set a reference value that can be recognized as an object in the image.


Face Detection

Face Detection technology analyzes faces in an image. Drag and drop the vertex to modify a previously set zone or click on the left mouse button to reset the zone

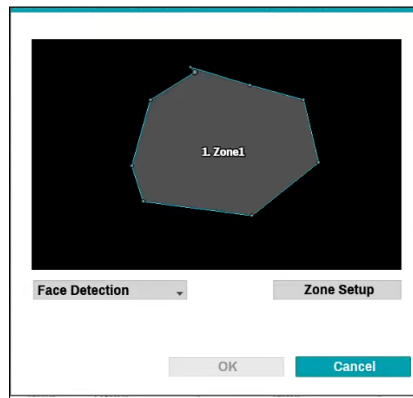

Right-click on the zone setup screen to bring up the Face Detection Menu.

- **Configuration** : Set the environment of Face Detection. Select Face Detection as the video analysis type, and then select Settings.

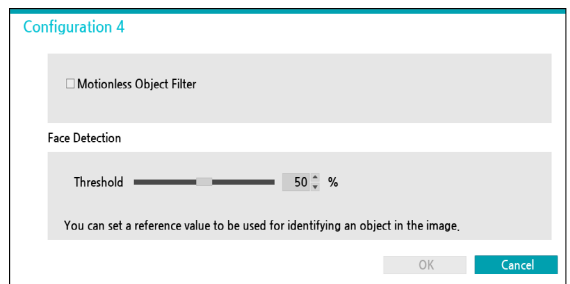

- **Motionless Object Filter** : Detect objects that remain motionless in an indoor space. However, it is recommended to use this setting only in environments with minimal movement, and it is not recommended when Loitering events are enabled.
- **Threshold** : Set a reference value that can be recognized as an object in the image.

VA Box Schedule

Configure the schedule of the VA Box. Select the + button on the bottom left of the screen to add a schedule. Select Day to specify the Day setting or select All. Select Scope to specify the time frame.

[illegible]

-  Deleting the schedules stops the real-time video analysis.

VA Box Maintenance

When using NetFS, select Firmware Upgrade. You can select USB storage or NetFS. If not using NetFS, you can select USB storage only. Select USB storage to display USB search window and then select the corresponding upgrade package from the storage device connected to the NVR's USB port. After selecting an upgrade package, select Apply to upgrade the VA Box.

Device

Alarm-Out

Connector

Remote Control

VA Box

Registration

Setup

Schedule

Maintenance

No.	Product	Version	Firmware Upgrade	
1	DV-1304-A	2.1.0		X
2	DV-1304-A	2.1.0		X
3	DV-1304-A	2.1.0		X
4	DV-1304-A	2.1.0		X
5				X
6				X
7				X
8				X
9				X
10				X
11				X
12				X
13				X
14				X
15				X
16				X
17				X
18				X
19				X

Upgrade

Apply

OK


Cancel

- If an upgrade attempt fails, an upgrade failure message will be displayed. Refer to **Error Code Types in the installation manual** for more details.
- The VA Box will reboot after the upgrade and then reconnect automatically.

Network Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

General

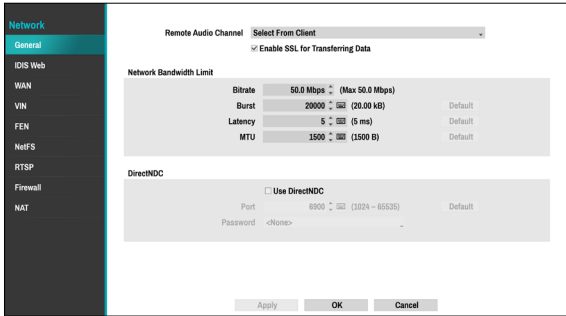

- **Remote Audio Channel:** Transmits the selected channel's audio to the remote program. Select **Select From Client** to stream audio of the channel selected on the remote program.

✓ Audio skipping and sync issues can occur under poor network conditions.

- **Enable SSL for Transferring Data:** Applies SSL (Secure Sockets Layer) protection on remote viewing and recording data transmissions.

- ✓
 - If using the SSL feature, it will not be possible to connect to the NVR from a remote program or a network keyboard that does not support SSL.
 - Changing the SSL setting temporarily severs all remote connections to the NVR in order to apply the change.
 - This product contains content developed by OpenSSL Project for use in Open SSL Toolkit (<http://www.openssl.org/>).

- **Network Bandwidth Limit:** Configure the network bandwidth sent to the remote locale.
 - **Bitrate:** Set the size of the bandwidth.
 - **Burst:** Set the burst-byte or buffer byte size.
 - **Latency:** Set the latency.
 - **MTU:** Set the maximum transmission unit (MTU).

✓ If you configured **Network Bandwidth Limit**, the live video may not display smoothly in a remote program.

- **DirectNDC:** Use Direct Network Display Control (NDC) by clicking the **Use DirectNDC** button to toggle between On and Off. You will be able to change the settings if Use DirectNDC is enabled. DirectNDC service allows you to access the NVR and control it remotely using a PC or mobile devices via Ethernet.
 - **Port:** Configure the port number of the DirectNDC server.
 - **Password:** Configure the **Password** to connect to the NVR from a remote locale.

✓ Up to three users at a time can access a NVR remotely via DirectNDC service.

Key	Function
←	Press the ← to move to the left in the menu. This is the same as pressing the Left arrow button on the front panel or the remote control.
→	Press the → to move to the right in the menu. This is the same as pressing the Right arrow buttons on the front panel or the remote control.
↑	Press the ↑ to move up in the menu. This is the same as pressing the Up arrow button on the front panel or the remote control.
↓	Press the ↓ to move down in the menu. This is the same as pressing the Down arrow button on the front panel or the remote control.
Enter or Return	Press the Enter or Return key to select the highlighted item or complete an entry that you have made during system setup. This is the same as pressing the Play/Pause button on the front panel or the remote control.
Character Input, Delete, BackSpace, Space	They play the same role as a keyboard input.
Esc	Press the Esc to escape the sequence.

F1	Press the F1 key to perform the panic recording . This is the same as pressing the PANIC button on the front panel or the remote control.
F2	Press the F2 key to reset all NVR outputs while the alarm has been activated including the built-in buzzer. This is the same as pressing the ALARM button on the front panel or the remote control.
F3	Press the F3 key to initiate PTZ mode. This is the same as pressing the PTZ button on the front panel or the remote control.
F4 or PaceUP/ PageDown	Press the F4 or PageUp or PageDown key to toggle between different display formats. This is the same as pressing the LAYOUT button on the front panel or the remote control.
F5	Press the F5 key to refresh the current DirectNDC screen.
F6	Press the F6 key to switch to the search mode. This is the same as pressing the Search Mode Button on the front panel or the CALENDER button the remote control.
F10 or Windows	Press the F10 or Windows key to display the Live Monitoring menu or Search menu on the screen. This is the same as pressing the MENU button on the front panel or the remote control.
Home	Press the Home key to copy video clips. This is the same as pressing the CLIP COPY button on the front panel.

IDIS Web



- **Use IDIS Web Service:** If you wish to use IDIS Web, select **IDIS Web - Use IDIS Web Service**. Select IDIS Web - IDIS Web Port and choose a port number between 1024 and 65535. The port number can also be entered using the virtual keyboard. For more information on IDIS Web, refer to the **Part 4 - IDIS Web on page 127**.
- **Expose HTTP server's banner:** Expose server information in HTTP headers.
- **SSL/TLS**
 - **USE :** When connecting to IDIS Web, the way of HTTPS communication is enabled.
 - **Enable Weak Cipher Suite:** Select or deselect Enable Weak Cipher Suite function.

WAN

Designate the IP address type as **IPv4_None**, **IPv4_Manual**, **IPv4_DHCP**, **IPv6_None**, **IPv6_Manual**, **IPv6_Auto** or **IPv6_Link-local**.

IPv4_None

The screenshot shows the 'Network' configuration page with the 'WAN' tab selected. Under the 'IPv4' section, the 'Type' is set to 'None'. The 'IP Address' field is disabled and shows '0.0.0.0'. The 'Subnet Mask' is '0.0.0.0' and the 'Gateway' is '0.0.0.0'. The 'DNS Server' is '0.0.0.0'. The 'Remote Port' is set to '8018' (range 1024-65535). The 'Use UPnP' checkbox is unchecked. There are buttons for 'Ping Test', 'Trace Route Test', 'Apply', 'OK', and 'Cancel'.

Select **None** and then **save** to disable IPv4 mode.

IPv4_Manual

The screenshot shows the 'Network' configuration page with the 'WAN' tab selected. Under the 'IPv4' section, the 'Type' is set to 'Manual'. The 'IP Address' field is '10.0.325.168' and has a QR code next to it. The 'Subnet Mask' is '255.255.0.0' and the 'Gateway' is '10.0.0.1'. The 'DNS Server' is '10.0.0.23'. The 'Remote Port' is set to '8018' (range 1024-65535). The 'Use UPnP' checkbox is unchecked. There are buttons for 'Ping Test', 'Trace Route Test', 'Apply', 'OK', and 'Cancel'.

- Set **Type** to **Manual**.



- **Manual** lets you configure related settings manually. Configure **IP Address**, **Gateway**, and **Subnet Mask** settings manually using the remote control's arrow buttons or the virtual keyboard.
- When registering NVR with the IDIS mobile application, you can easily enter the IP address using the QR code.

- **DNS Server:** Enter the DNS server's IP address. The IP address can also be entered using the virtual keyboard.
- **Remote Port:** The port used by the remote program to connect to the NVR. Choose a value between 1024 and 65535. The port number can also be entered using the virtual keyboard.
- **Ping Test:** Select to test the current WAN settings you

made.

The screenshot shows the 'Network Test' dialog box. It has fields for 'Network Address' (192.168.1.254), 'Test Count' (5), and 'Test Result'. There are 'Default' and 'Run' buttons. Below the dialog, there is a 'See More' section with 'Transmission Status' and 'Round-Trip Status' fields, and a 'Close' button.

- 1 Enter the IP address of the NVR.
- 2 Adjust the frequency of the ping test.
- 3 Select **Run** to do the test. The test result is displayed.
- 4 Select **Close** to exit.



- If using a firewall, select Change Port to change the port number to one that is permitted by the firewall.
- Changing the port temporarily severs the NVR's remote connection.



Remote point IP and port settings on the remote program must also be changed in order for it to connect to the NVR.

- **Trace Route Test:** The NVR tries to trace a network path to its destination.



- 1 Set the network address of the destination.
- 2 Set the maximum number of hops.
- 3 Select **Run** to do the test. The test result is displayed.
- 4 Select **Close** to exit.


- To use the **UPnP** (Universal Plug and Play) feature, select **Use UPnP**. If using an IP router (or NAT), UPnP service allows the device to automatically forward the port to the NVR.



- This port is used to access a port that has a private IP address.
- In order to use the UPnP service, the IP router (or NAT) must support UPnP port forwarding and have the relevant options enabled.
- Port number cannot be changed with **Use UPnP** selected.

- **Status:** Indicates the number of the port forwarded by the IP router (or NAT) to the NVR via UPnP service.

IPv4_DHCP

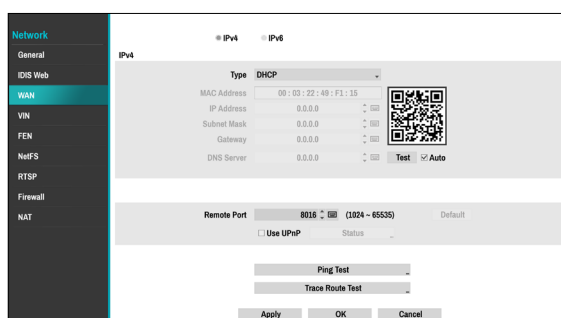

Select **DHCP** and then **Save** to retrieve IP address and other network settings automatically from the DHCP server. Once the network settings have been retrieved, the NVR's current IP address is displayed in the IP Address field.




- It may not be possible to retrieve the IP address if there is no DHCP server. If this is the case, contact your network administrator.
- With DHCP, the NVR's IP address might change with each startup.
- When registering NVR with the IDIS mobile application, you can easily enter the IP address using the QR code.




There is a limit to the number of users allowed to connect remotely at the same time. Contact the service center for more information.

IPv6_None

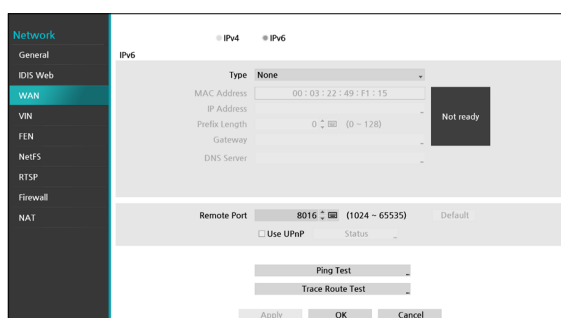


Select **None** and then **save** to disable IPv6 mode.

IPv6_Manual

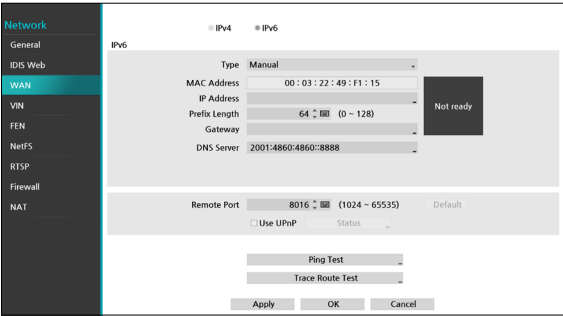


- ✓ **Manual** lets you configure related settings manually. Configure **IP Address**, **Prefix Length**, **Gateway**, and **DNS Server** settings manually using the remote control's arrow buttons or the virtual keyboard.
- When registering NVR with the IDIS mobile application, you can easily enter the IP address using the QR code.

IPv6_Link-local

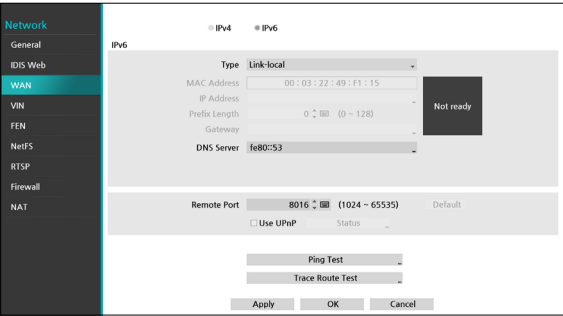

Configure the Link-local address. It is used by nodes when communicating with neighboring nodes on the same link.

IPv6_Auto

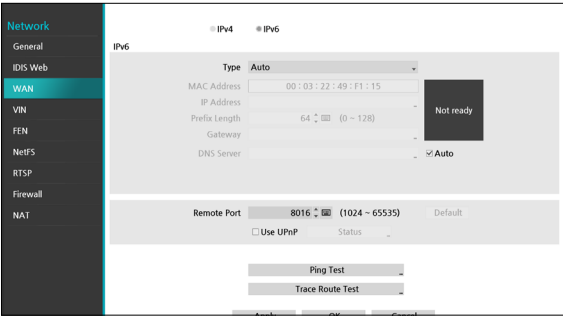


Select **Auto** to automatically assign IP addresses. You can set the DNS server when **Auto** function is not selected.

VIN


If the camera is networked but not scanned, use this setup. This setup allows you to change the network setting of the NVR's VIDEO IN port which is camera's network environment.




- Check the camera's network setting first before you use this setup.
- Our recommendation is complete separation between the VIN and WAN networks.

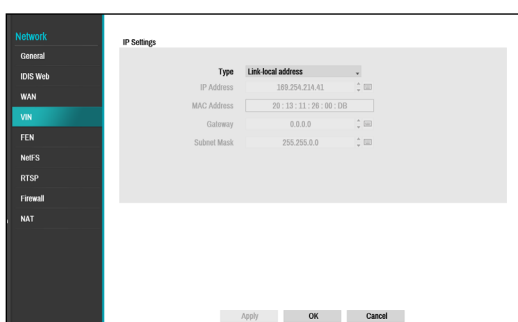


- **Link-local address:** Indicates the default IP address of VIDEO IN port.

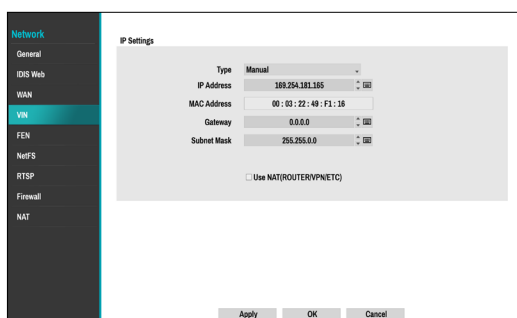

- **Manual:** Allows you to enter the IP address and other network settings manually.
 - **Use NAT(ROUTER/VPN/ETC):** Allows access to specific subnets. (It is not recommended unless you are a network expert)

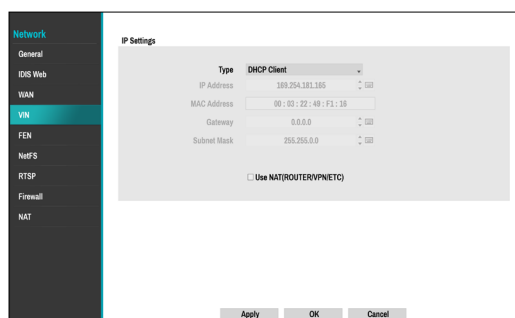

- **DHCP Client:** Retrieves an IP address and other network settings automatically from a DHCP server.
 - **Use NAT(ROUTER/VPN/ETC):** Allows access to specific subnets. (It is not recommended unless you are a network expert)

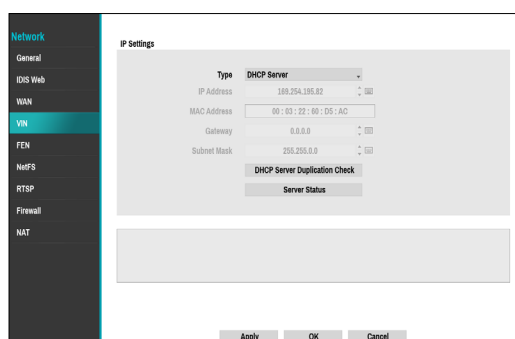

- **DHCP Server:** It makes the NVR run as a DHCP server. Check if there is another DHCP server on the same network. If there is no DHCP server, this option is enabled. The NVR allocates an IP address automatically in the range of **10.10.0.128** to **10.10.254.254** by using DHCP to the camera connected to the NVR's VIDEO IN port.
 - **Server Status:** Indicates client's MAC address, IP address, and expiration period.



When several NVRs exist in the same network, only one of NVRs has to be run as a DHCP server. If several DHCP servers are running, the redundant IP may be allocated to the camera.

FEN

If using a dynamic IP address, FEN service makes it easy to connect to the NVR from a remote program without having to configure dynamic IP or router settings.



- **Use FEN:** Check if you wish to use FEN service.
- **FEN Name:** After entering the NVR name you wish to register on the FEN server, check and register the entered name. This is a unique NVR name that will be registered on the FEN server.0



- You will not be able to save FEN settings unless you click on the Check button next to the NVR Name field and check the entered name's availability.
- You will be prompted with an error message if you do not enter NVR name or enter a name already registered to the FEN Server.
- If the device name contains the #, \, and/or % symbol, it might not be able to connect to the NVR from the IDIS Web program.
- When registering NVR with the IDIS mobile application, you can easily enter the IP address using the QR code.

- **FEN Server:** Enter the FEN server's IP address or domain name.



If you have configured the DNS Server setting under **Network - WAN**, you can enter the FEN server's domain name instead of its IP address in the **FEN Server** field.

- **Port:** Specify the FEN server's port number.



If using an IP router (or NAT), port configuration and other network functions will depend on the usage method of the IP router (or NAT).

- **Status:** Used to check the status of the device being registered to the FEN server.

Select **Save** after making changes to register the NVR's name to the FEN server.




If FEN has been configured correctly, the FEN server's help desk information will be displayed in the **Help Desk** field the next time you access the FEN Setup screen.

NetFS

This allows you to register NetFS sites for the following functions:

- Upload or download files to upgrade, import/export of a setup file, log export or self-diagnosis export on an FTP site. The related settings are as follows:
 - :  (Setup) in the live monitoring mode - System menu - General tab - Upgrade, Import, Export or SystemLog - Self-Diagnosis Export
 - :  (Setup) in the live monitoring mode - System menu - Self-Diagnosis Export
 - Upload clip-copy files to an FTP site. The related settings are as follows:
 - :  (Export) in the search mode - A-B Clip-Copy or Clip-Copy.
 - FTP notification of an event detection (system events excluded). The related settings are as follows:
 - :  (Setup) in the live monitoring mode - Notification menu - FTP tab - FTP setting,
 - :  (Setup) in the live monitoring mode - Event menu - Actions - Notify (FTP) setting)
- ☒ • It is recommended that you use FileZilla and smallFtp servers.
- This feature is supported only in the passive mode (PASV) of the FTP site.

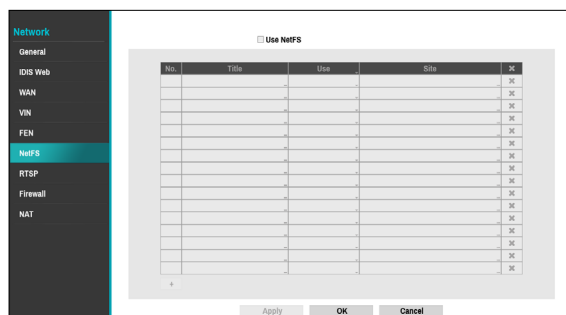


Select Use NetFS to use the **NetFS feature**. Click the + icon at the bottom of the list to add up to 16 FTP sites.

- **Title:** Check if you wish to use FEN service.

- **Use:** Select the usage for the NetFS feature.
 - N/A : Disables the NetFS feature.
 - ALL: Enables the NetFS feature.
 - Upgrade: Allows you to use the upgrade file that was uploaded to the NetFS site.
 - Setup: Allows you to import or export a setup file that was uploaded to the NetFS site.
 - System Log – Allows you to save system logs to the NetFS site.
 - Clip-Copy – Allows you to manually copy video clips or automatically copy event-detected video clips to the NetFS site.
- **Site:** Enter NetFS site information.
 - When you delete an FTP site from the NetFS setup screen in the Network menu, the FTP site in the FTP setup screen in notification will be deleted, too.
 - When you change the usage to anything other than ALL or Clip-Copy, the FTP notification function will be disabled.
 - Select the  icon to delete the existing NetFS site.

Enter information about the NetFS site using the virtual keyboard and then click the **test** button to test the current NetFS site.

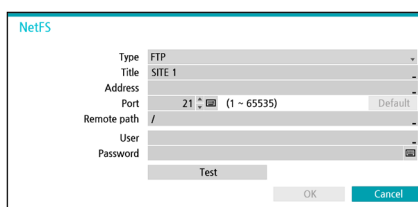

- **Type:** Select the NetFS type.
- **Title:** Enter the NetFS site name using the virtual keyboard.
- **Address:** Enter the NetFS address using the virtual keyboard.
- **Port:** Configure the port to connect to the NetFS site.
- **Remote path:** Enter a folder path to the NetFS site using the virtual keyboard.
- **User / Password:** Enter the user and password to access the NetFS site using the virtual keyboard.
- **Test:** Test the current NetFS site settings you have entered.

RTSP

RTSP service allows you to monitor real-time using the Real-Time Streaming Protocol.

- **RTSP Port:** Set the port number of the RTSP server obtained from your system administrator.
- **Max Session Count:** Set maximum allowed number of RTSP sessions.
 - ✓ RTSP may malfunction if multiple sessions are connected simultaneously.
 - The maximum number of sessions can be set to a number between 10 and 16.
- **RTP Port:** Set the start/end port number of the RTP server obtained from your system administrator.
 - ✓ You can access a remote NVR and monitor live video images using media players, such as VLC Player, supporting RTSP service. Start the media player on your local PC and enter "rtsp://ID:Password@IP address:RTSP port number/trackID=channel number" (e.g.: rtsp://admin:@10.0.152.35:554/trackID=1)
 - Video display on certain media players may not be smooth depending on the network status.
 - RTSP service might not be supported, depending on the type of media player.

Firewall

Setting up a customized firewall rule set, it allows or denies access such as specific MAC address, IP address and receiving network port of the NVR.


Select **Use Firewall** to activate firewall function. Click the + icon at the bottom of the list to set up a firewall rule.

- **Title:** Edit the name of the rule.
- **Type:** Set the IP address, the MAC address or the network port.
- **Action:** Select which actions to apply this firewall rule to.
 - **Drop:** Discard the packet that matches all the specified conditions.
 - **Reject:** Deny the packet that matches all the specified conditions and send back an ACK packet telling it that the "packet was dropped" to the sender.
 - **Accept:** Allow the packet that matches all the specified conditions.
- **Interface:** Specify the ethernet interface. It refers to a WAN (Network Client) or VIN (Video-In).
- **Mac Address:** If the rule is set to MAC address, enter the sending MAC address
- **IP:** If the type of the rule is set to IPv4 or within the IPv4 scope, enter the sending IP address.
- **Port:** If the type of the rule is set to port or within the port scope, enter the receiving network port number of NVR.

NAT

NAT function is to connect to the camera which is internal VIN network from the physically divided WAN network PC (WebSetup / IDIS Web / IDIS Center program / RTSP).

To connect to the camera WebSetup / IDIS Web / IDIS Center program / RTSP function, you need to configure the NAT rule to forward ports from NVR port number to the camera port number.

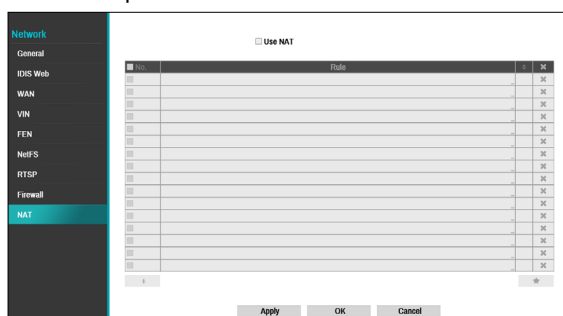

Select **Use NAT** to activate NAT function. Click the + icon at the bottom of the list to set up a NAT rule.

- **Title:** Edit the name of the rule.
- **Type:** Set the IP address, the MAC address or the network port.
- **Action:** Select which actions to apply this NAT rule to.
 - **PORT_FORWARD:** Allow the access by combining an external TCP/UDP port with an internal port.
- **Protocol:** Set the network protocol to apply the rule to.
- **Interface:** Specify the ethernet interface. It refers to a WAN (Network Client) or VIN (Video-In).
- **IP:** If the type of the rule is set to IPv4 or within the IPv4 scope, enter the sending IP address.
- **Port:** If the type of the rule is set to port or within the port scope, enter the receiving network port number of NVR.



It is not possible to set an interface from VIN to WAN direction. For more information on NAT, refer to **NAT Configuration Guide on page 135**.

Notification Setup

Schedule

Select the + icon at the lower left corner of the screen to add a notification schedule.

- **Day:** Add different schedules for different days of the week.
- **Range:** Change the event notification time frame.
- **Notify:** Select which notifications to generate when an event occurs. Select **Mail**, **LAN 1 through 5**, **Push**, **HTTP**, **FTP**, and/or **Summary**.



- In order to use the **Notification** (Callback) feature, the NVR must be registered on the remote program.
- Select the  icon to delete the existing schedule.

- **Summary Email Interval:** Device information, camera/device event summary information and device health status summary are sent by e-mail to a remote location at specified intervals.



- SMTP must be set to enable the Summary Email Interval function. For more information, refer to **SMTP Setup on page 106**.
- The recipients can be set on the Notification Setup - Mail tab. For more information, refer to **Mail on page 106**.

1) Example of Device Information Summary Mail

Device Information

- Host: 2022-12-21 10:00:00
- Device Name (NVR Name): 8013-540-101
- MAC Address: 10:20:30:40:50:60
- IP Address (LAN): 10.10.10.10
- IP Address (WAN):

Summary Information

- Since 12-20-2022 AM 00:00:00, the following events have been detected:

No.	Status	Trigger	Temping	Video Loss	Recording Fail	Audio Detection	Face Detection	Fan Error	PM	Auto Backup	Linking	Line Crossing	Shout Detection	Violation
1	1 detected violation via video													
2	2 detected violation via video													
3	3 detected violation via video													
4	4 detected violation via video													
5	5 detected violation via video													
6	6 detected violation via video													
7	7 detected violation via video													
8	8 detected violation via video													

2) Example of Camera/Device Event Summary Mail

Event - Device

No.	Alarm-In	Network Alarm	Text-In	Exceed Occupancy Limit	Social Distancing Violation	Mask Rule Violation	Queue Congestion	VIA Loss
1	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-	-
4	-	-	-	-	-	-	-	-
5	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-
7	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-

3) Example of Device Health Status Summary Mail

Device Health Status																																	
No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	
Camera Signal	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Recording Fail	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	
V/A Box Signal	0	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Recording Status	Good																																
Recorded Video	12-13-2022 PM 01:56:20 ~ 12-20-2022 AM 10:25:17																																
HDD#	Internal 1 : In Use																Internal 3 : In Use																
Disk Bad	Good (0 %)																Good (0 %)																
Mirror	Internal 1 (Mirror)																																
Mirror Status	1 : Mirroring																2 : Mirroring																-
HDD Temperature	Good (45.0°C)																Good (39.0°C)																Good (46.0°C)
S.M.A.R.T.	Good																Good																Good
Fan Status	Good [0]																Good [1]																

Callback

Configure Callback settings.

No.	Title	Address	Port
1			8201
2			8201
3			8201
4			8201
5			8201

Setup

Default Apply OK Cancel

Enter the title and IP address of the receiving server and set **Retry** to between 1 and 10 in case of connection failure.

Select the Setup... button at the lower right corner of the screen to configure Callback Retry Policy.

Callback - Setup

Short-Term Retry Policy

Retry: 5
Dwell: 3 sec.

Long-Term Retry Policy

☒ Use

Retry: 3
Dwell: 15 (15 min.)
Check Interval: 3 (3 min.)

Max. Queue Size: 500

OK Cancel

• **Short-Term Retry Policy:** Configure short-term policy to retry a callback event.

- **Retry:** Number of times to retry a callback event.
- **Dwell:** Wait time (in seconds) between retry attempts




• **Long-Term Retry Policy**

- **Use:** Configure long-term policy to retry a callback event.
- **Retry:** Number of times to retry a callback event.
- **Dwell:** Wait time (in minutes) between retry attempts
- **Check Interval:** Interval time (in minutes) to check failover.




In a general wired network communication environment, not a wireless (mobile) / satellite communication environment where communications failures are frequent, long-term retry policies (LTRPs) are not required, except for particular cases.

- **Max. Queue Size :** Determine the maximum number that can be processing events. You can limit from 300 to 1000 queues. For more information on Callback Retry Policy, refer to the graph below.

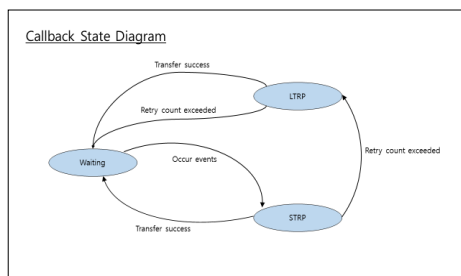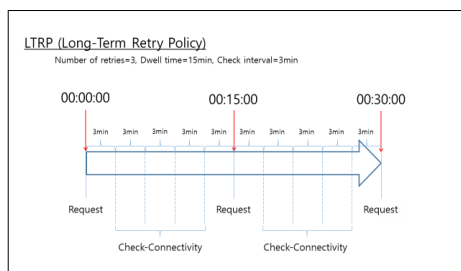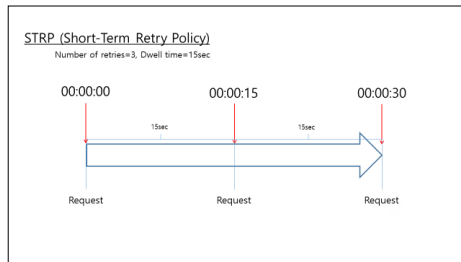


Mail

Configure Mail settings.

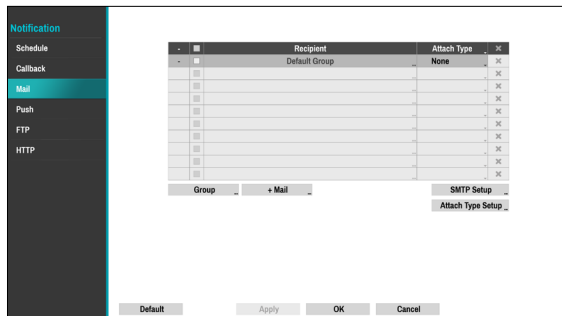

- **Group:** Add a recipient group and select the image file format attached to an email.

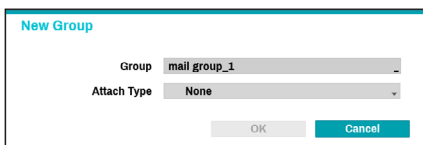


A virtual keyboard appears allowing you to enter the Group name. You can select between CBF and MP4. When selecting CBF, the NVR will attach an event detected video clip to an email. When selecting MP4, the NVR will attach the event detected image file (MP4 format) to an email.



- Be careful when interconnecting with 3rd-party solutions and systems, since email notification is a Best-effort service, not a Guarantee service.
- Email notification does not guarantee real-time due to SMTP protocol.
- If multiple transmissions occur in a short period of time, email attachments may not be sent correctly.

- **+Mail:** Add a mail recipient

Select the group name and then assign the **Group** to Recipient. Enter the recipient's e-mail address and mail server provider. Select the ★ icon to select the mail server provider from a list of registered SMTP mail server providers.

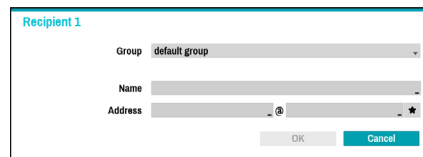

- The recipient's mail address must be in the correct email format and contain the @ symbol.


Select the **Attach Type** to attach event recordings to outgoing mails to an account that belongs to that group.

Select the ✕ icon to remove the account and added group.

SMTP Setup

Select **SMTP Setup** at the bottom right corner of the screen to configure an SMTP server.

- 1 Select the SMTP server **Type**.
- 2 Enter the **SMTP Server's** IP address or domain name and then configure the **Port** and **Sender** settings.

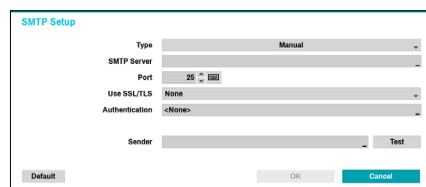


Default SMTP server port number is **25**. Select **Test** to send out a test mail using the current settings. Select SS/TLS or STARTTLS, depending a method of supporting a secure connection.



- If you have configured the DNS Server setting under **Network - WAN**, you can enter the SMTP server's domain name instead of its IP address in the **SMTP Server** field.
- Address entered under **Sender** must be in the correct email format and include the @ symbol.

If user authentication is required by the SMTP server, select **Use** and then enter the **User** and **Password** information.




The Authentication dialog box has a title bar 'Authentication'. It contains a checkbox labeled 'Use'. Below it are two input fields: 'User' and 'Password'. At the bottom are two buttons: 'OK' and 'Cancel'.

3 Select **OK** to apply and exit.

- ☒ This product contains content developed by OpenSSL Project for use in Open SSL Toolkit (<http://www.openssl.org/>).

Attach Type Setup

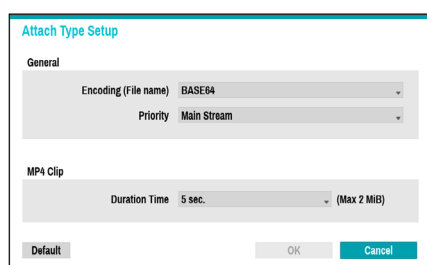

The Attach Type Setup dialog box has a title bar 'Attach Type Setup'. It has a 'General' section with two dropdown menus: 'Encoding (File name)' set to 'BASE64' and 'Priority' set to 'Main Stream'. Below this is an 'MP4 Clip' section with a 'Duration Time' dropdown set to '5 sec.' and a note '(Max 2 MiB)'. At the bottom are three buttons: 'Default', 'OK', and 'Cancel'.

- **Encoding (File name):** Set the encoding for the name of the attached files to BASE64 or PLAIN-TEXT.
- **Priority:** Set the stream video for email and FTP attached files to Main Stream or Sub Stream.
- **MP4 Clip:** When sending an e-mail, event recordings will be attached and you can set the time to record MP4 clips.

- ☒ Event recordings are attached only for the event that the camera generates.

Push

Configure Push settings.




The Push configuration dialog box has a sidebar with options: Notification, Schedule, Callback, Mail, Push (selected), FTP, and HTTP. The main area has a checkbox 'Push' which is checked. Below it are fields for 'Push Server' (push.idisglobal.com), 'Port' (8081), and 'Ignoring Time' (30 sec.). At the bottom are buttons: 'Default', 'Apply', 'OK', and 'Cancel'.

Select **Push** to use Push feature.

The Push feature sends out event-related messages to mobile phone.

- ☒ Enable to receive the event occurred in NVR on the mobile phone(Android, iOS). The NVR must be registered and set in mobile phone.

FTP

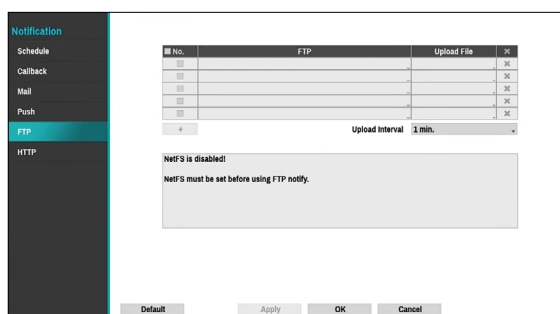

The FTP configuration dialog box has a sidebar with options: Notification, Schedule, Callback, Mail, Push, FTP (selected), and HTTP. The main area shows a table with columns: 'No.', 'FTP', and 'Upload File'. Below the table is an 'Upload Interval' dropdown set to '1 min.'. At the bottom, there is a message: 'NetFS is disabled! NetFS must be set before using FTP notify.' At the very bottom are buttons: 'Default', 'Apply', 'OK', and 'Cancel'.

The FTP feature uploads event-detected images or video clips to the FTP site when an event occurs. Click the + icon at the bottom of the list to add an FTP site.

- **FTP:** Enter the FTP site information using the virtual keyboard.
- **Upload File:** Select the file format to be uploaded to the FTP site.

- ☒ Up to 5 FTP sites can be registered.

Click the + icon at the bottom of the list to add an FTP site.

- **Site:** Displays the list of the registered FTP sites. Select an FTP site from the list. If the Use settings of the NetFS site are set to anything other than **ALL** or **Clip-Copy**, you cannot select the FTP site. You can change the Use settings or register other FTP sites in the NetFS setup screen in the Network menu.
- **Upload File:** Select between **CBF** and **MP4**. When you select **CBF**, the NVR will upload an event detected video clip to the FTP site. When you select **MP4**, the NVR will attach an event-detected video clip to the FTP site.
- **Site Information:** Displays information for the FTP site.



- For the FTP notification to work properly, the related settings should be configured as follows:
 - **Network menu - NetFS tab - Use setting**
 - **Event menu - Actions - FTP setting**
- When you delete an FTP site from the NetFS setup screen in the Network menu, the FTP site in the FTP setup screen in the Notification menu will be deleted, too.
- Be careful when interconnecting with 3rd-party solutions and systems, since event uploading is a Best-effort service, not a Guarantee service.
- Event upload does not guarantee real-time due to the characteristic of the feature.
- The FTP notification is not supported for system events.
- If multiple transmissions occur in a short period of time, email attachments may not be sent correctly.
- If upload fails several times, the images or video clips are deleted.
- When the NVR boots, all images and video clips are deleted even if they were not uploaded yet.

HTTP

Notify or forward the events on remote HTTP servers. The event and NVR information are sent to HTTP servers in a JSON format.

Click the + icon at the bottom of the list to enter the HTTP server information.

- **Title:** Enter the name of the HTTP site.
- **Type:** Select the request method of an HTTP message.
- **Address:** Enter the address of HTTP notifications.
- **Path:** Enter the path of HTTP server address.
- **User / Password:** Enter the user and password to access the HTTP site.
- **Data Format:** Set the data format of transmitted messages.
- **Include Status:** Select some options for status to include in an HTTP notifications.

HTTP Notification Setup

An attribute and parameters must be included when sending the http requests. Click the **Setup...** icon at a bottom right corner of the window. When the following window appears, click the **+** button to set the HTTP attributes such as the type, name and value.

- **HTTP Request Parameters:** Set a specific response to an HTTP request.
 - **Timeout:** Set the maximum time allowed for connection.
 - **Retry:** Set the number of times to reconnect when a connection fails.
 - **Delay Time (Retry):** Configure the time interval between each retry attempt (initial delay between retry attempts)

HTTP Notification Attribute

- **Type:** Select the corresponding type such as BOOL, INT32, FLOAT32 and STRING.
- **Name:** Enter the name of HTTP notification attribute.
- **Value:** Enter the value of HTTP notification attribute.


Display Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

Device


- **Manual Configuration:** Set the resolution manually regardless of the resolution supported by the monitor.
- **Resolution:** Select from 3840 x 2160, 1920 x 1200, 1920 x 1080, 1680 x 1050 and 1600 x 1200.
 - ☒ Supported resolutions may be restricted depending on the monitor.
 - 3840 x 2160 @ 50/60Hz resolution is supported only in HDMI 2.0 monitor.
 - We recommend using 3840 x 2160 or 1920 x 1080 resolution.
 - If you use a VGA monitor as the main display, we recommend that you use a resolution of 1920 x 1080 or below.
 - HDMI deep color feature is not supported.
 - When using a KVM (Keyboard, Video and Mouse) switch, the monitor or keyboard/mouse devices may not function properly.

Screen

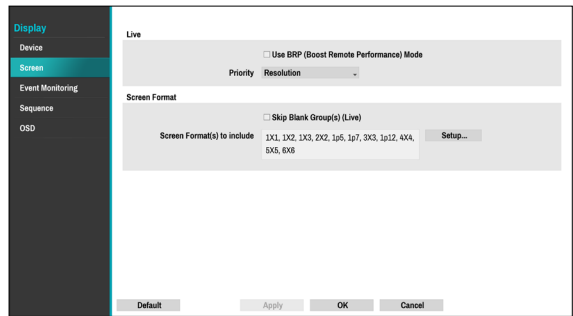

- **Use BRP(Boost Remote Performance) mode** : With BRP mode on, the camera full screen does not display in live mode and the network bandwidth can limit to 100Mbps.
- **Priority** : Select the camera's live stream priority, either resolution or frame rate.
- **Skip Blank Group(s) (Live)** : Skip the unregistered blank channel groups on the live screen.
- **Screen Format(s) to include**: Click the **Settings...** button to select the screen format to be displayed on the live and search mode.

Event Monitoring

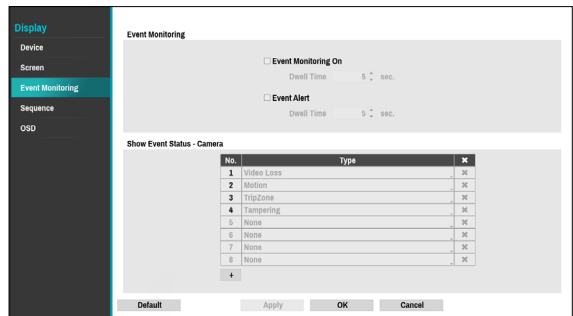

- **Event Monitoring On**: With Event Monitoring enabled, the camera screen linking event monitoring is shown. For more information on Event Monitoring, refer to the **Event Monitoring on page 28**.
- **Event Alert**: With Event Alert selected, the red line appears on the top of the camera screen linking event monitoring when an event occurs.
- **Show Event Status - Camera**: Add camera events displayed on the **Status > Camera** page.

Sequence

Configure monitor-related settings.



- **Mode**: Select **Full Sequence** or **Cameo Sequence**.
- **Interval**: Select between 3 secs and 2 mins. For more information on Sequence, refer to the **8 Sequence on page 24**.

OSD

Show OSD (On Screen Display) information on the bottom of the screen.



Status

- **Date and Time**: Displays the date and time.
- **Remote Control**: Displays remote control receptivity.
- **Network**: Displays the icon when the unit is connected to a network via Ethernet.
- **Free Space**: Displays whether or not the NVR is in the recycle mode, and displays the available storage space when not in the recycle mode.
- **User Name**: Displays the current user logged in.
- **Background Panel**: Displays background panel at the bottom of the screen in black.
- **Use Watermark**: To discourage unauthorized

reproduction, or distribution of video, user names , website and email information are displayed as watermarks.

- **Rebuild:** Displays RAID rebuild.

Camera


- **No.:** Displays the camera number on the upper left corner of the camera screen.
- **Title:** Displays the camera name on the upper left corner of the camera screen.
- **Record:** Displays recording and schedule icons.
- **Audio:** Displays the  icon on channels generating audio.
- **PTZ:** Displays the  icon on PTZ cameras.
- **PTZ Zoom:** Displays the zoom magnification (e.g. x2, x3, etc.)
- **Text-In :** Displays data received from text-in device. Select **Display Dwell** and specify how long to display data. Data are shown on the single screen only.
- **Resolution :** Displays the recording resolution.
- **Codec :** Displays the codec information.
- **Zoom:** Displays a zoomed in state.
- **Freeze & Sequence:** Displays freeze and sequence icons.
- **Screen Group:** Displays the current screen's group.

Status Setup

Refer to the **Menu Use on page 33** for basic information on using the Setup menus.

Camera

This screen displays an overview of camera events. When an event occurs, the corresponding channel flashes for 5 seconds. To add camera events, refer to the **Event Monitoring on page 110**.

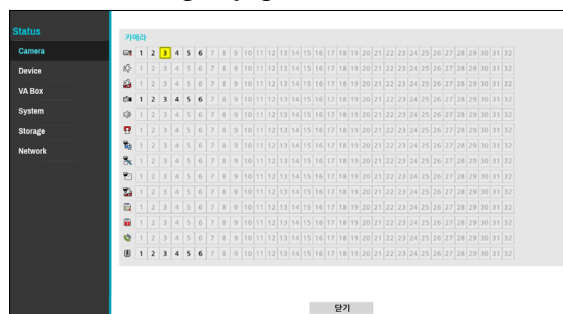


Event Types

	Motion		Trip Zone
	Tampering		Video Loss
	Audio Detection		Loitering
	Line Crossing		Object Detection
	Intrusion		Face Detection
	Storage Disconnected		Disk Bad
	Intercom		Tampering Switch

Device

This screen displays an overview of device events. When an event occurs, the corresponding channel flashes for 5 seconds.

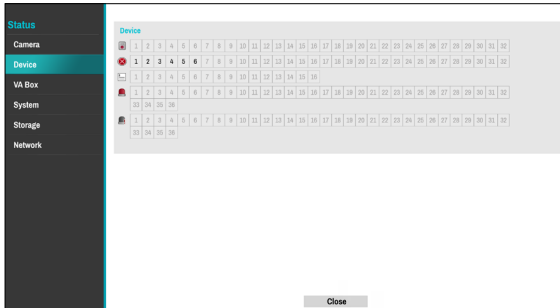

Event Types


	Text-In		Recording Fail
	**Recording Fail of Main Stream		**Recording Fail of Sub Stream
	Alarm-In		Check Alarm-In
	Network Alarm		



** The two events are supported by some products only.

VA Box

This screen displays an overview of VA Box events. When an event occurs, the corresponding channel flashes for 5 seconds.

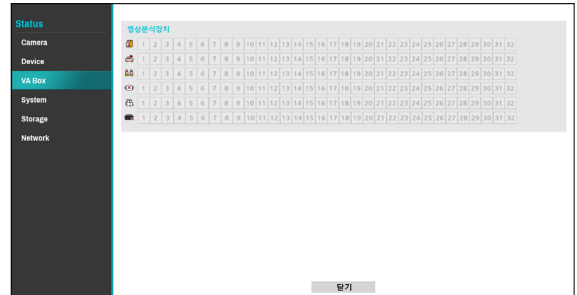


Event Types

	Exceed Occupancy Limit		Social Distancing Violation
	Mask Rule Violation		VA Loss
	Queue Congestion		Exceed Vehicle Count

System

This screen displays an overview of system events. When an event occurs, the corresponding channel flashes for 5 seconds.

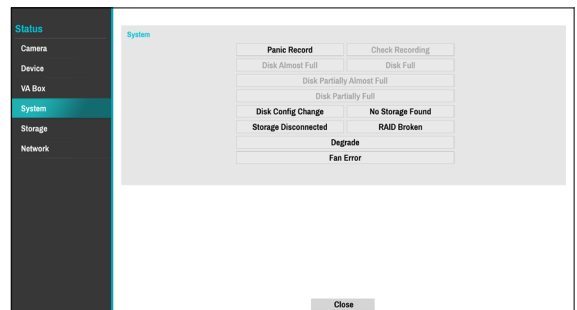

- **Panic Record:** Displays event status based on current Panic Record status.
- **Check Recording:** Displays event status based on **System Monitoring** settings.
- **Disk Almost Full/Disk Full:** If the storage device is not in **Recycle** status, event status is displayed when the amount of disk space specified under **System Monitoring** is reached and when the disk becomes

100% full.

- **Disk Partially Almost Full / Disk Partially Full:** If the storage device is not in Recycle status, event status is displayed when a disk in one of multiple quota groups reaches a specified capacity or disk usage reaches a specified capacity under System - Monitoring. For more information, refer to the [Mirror Configuration Error on page 41](#).
- **Fan Error:** Event is indicated when the cooling fan cannot reach a certain RPM or fails for longer than 50 seconds.
- **Storage Disconnected:** Event status is displayed when the storage device is abruptly disconnected.
- **Disk Config Change:** It will be highlighted when the NVR reboots after the hard disk drive has been replaced.
- **RAID Broken:** Event status is displayed when the mirroring configuration is broken.
- **Degrade:** Event status is displayed when one of the HDDs composing mirroring is in error.
- **No Storage Found:** It will be highlighted when no recordable storage device has been found.

Storage

Indicates each disk's status.

Status	Type	Disk Bad	Temperature	S.M.A.R.T.
Camera	Internal 1	Good (0%)	Good (45 °C)	Good
Device	Internal 3	Good (0%)	Good (45 °C)	Good
VA Box				
System				
Storage				
Network				

Recorded Data	
From	2022-12-13 PM 01:54:20
To	2022-12-20 AM 09:24:42
Close	

Configure Disk Bad and Disk Temperature settings under **Setup > System > Monitoring** and click on the S.M.A.R.T section to view the S.M.A.R.T information.

Disk Bad	Not Formatted	A disk that has never been used before.
	Good	• Disk performing normally. • If the HDD is partially damaged, indicates the bad sector percentage.
	Error	• If the HDD's bad sector ratio is higher than as designated by the user. • Generates a system event.
Temperature	N/A	Unable to detect the disk's temperature.
	Good	Operating within normal temperature range.
	Bad	• Disk temperature higher than as designated by the user. • Generates a system event.
S.M.A.R.T.	N/A	A disk that does not support S.M.A.R.T.
	Good	A disk with normal S.M.A.R.T. status.
	Bad	A disk with abnormal S.M.A.R.T. status. Possibility of damage within 24 hours.

- ☒
- Check all data's storage time information under **Recording Data**.
 - Clicking the temperature, S.M.A.R.T can check the each HDD information.

Network

This page provides a complete overview of the network status in real-time.

The network status dashboard displays a central switch connected to multiple cameras and a PC. The cameras are arranged in two rows, with power consumption values (e.g., 0.8W, 0.7W) shown next to each. The PC is connected to the switch via a LAN port. The dashboard includes a legend for connection status (Connected, Connecting, Disconnecting, Waiting, Error) and a 'Close' button. The total PoE power consumption is shown as 24.0W (Max 200.0W).

Information shown include camera connection status, LAN port link status, power consumption, number of connected clients, and network connection info.


Camera Connection	 indicates the camera manufactured by IDIS is connected.  indicates the camera manufactured by IDIS is not connected.  indicates the camera other than IDIS is connected.  indicates the camera other than IDIS is not connected. Clicking the image displays the camera's channel number. Clicking the image displays status information of the device connected to the NVR.
Network Switch	 indicates a network switch is connected to the LAN port and shows how many cameras are connected. Clicking the image displays the camera's channel number. Clicking the image displays status information of the device connected to the NVR.
Video Encoder	 indicates a video encoder is connected to the LAN port and shows how many cameras are connected. Clicking the image displays the camera's channel number. Clicking the image displays status information of the device connected to the NVR.
Video Analytics Box	 indicates a video analytics box is connected and the total number of connected cameras is displayed. Clicking the image displays status information of the device connected to the NVR.  indicates the video analytics box is not connected
LAN Port Link	 indicates a camera or a network switch is connected.  indicates neither is connected.
LAN Port Speed	 indicates 10/100Mbps and  indicates 1Gbps.
Power Consumption	If receiving power from the NVR, the actual amount of power consumed by each camera is indicated under each camera icon. Total power consumption is shown at the top of the screen in the following format: Total PoE Power Consumption: 24.6W (Max 200.0W) Ports 1 through 16 in PoE-enabled products support PoE.  (VIDEO IN Ext.) and  (NETWORK CLIENT) ports do not support PoE.
Number of Connected Clients	Indicates whether there are clients connected to the NVR via an external network and how many clients are connected.  indicates at least one client is connected.  indicates no client is connected.
Network Connection Info	Indicates network connection statuses (connected, connecting, disconnected, and connection error) using following lines:  CONNECTED  CONNECTING  DISCONNECTED  WARNING  ERROR (WARNING: When PoE switch is connected and network bandwidth is less than 100Mbps) (ERROR: When PoE switch is connected and network bandwidth is less than 10Mbps)

Part 3 - Search

Time-Lapse Search

While in Live mode, select the **Search Mode**  icon and select **Time-Lapse Search**, **Event Log Search** or **Thumbnail Search**. Select **Menu** while in Search mode to display a menu from which you can select **Control Area**.

- 1** Press **Menu** once more to move the **Control Area**.
- 2** In 2 seconds after moving the **Control Area**, the **Control Area** becomes selected and the corresponding menu disappears.
- 3** After selecting the desired **Control Area**, use the arrow buttons on the front panel or the remote control to select the menus and options. Search menu can also be displayed by placing the mouse cursor on the upper portion of the screen.

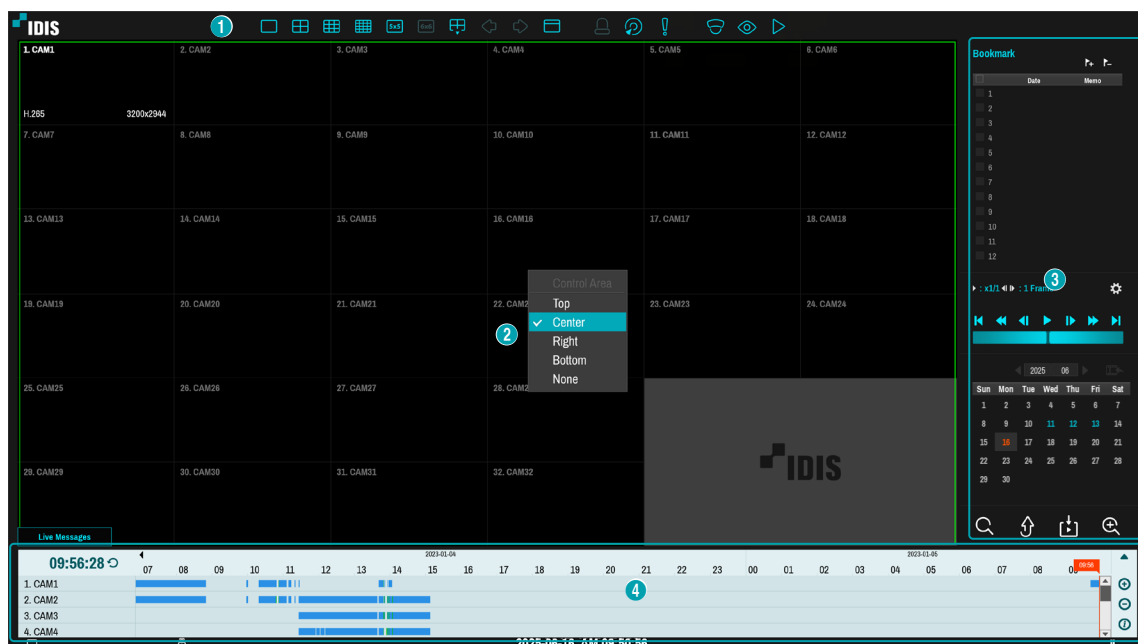

The **Control Area** consists of **Top**, **Center**, **Right**, **Bottom**, and **None**.

- ① **Top:** Activates top Search menu. Use the arrow buttons to select an option.
- ② **Center:** Activates the middle screen section. Use the arrow buttons to select a camera.
- ③ **Right:** Activates the control buttons on the right. Use the arrow buttons to select Bookmark, Play, Calendar Search, and other control buttons.
- ④ **Bottom:** Activates the bottom record table. Use the arrow buttons to select a record table.
- ⑤ **None:** Activates the arrow and playback buttons as a recording function.



The error OSD "OUT OF CODEC MEMORY" is displayed when codec decoder is out of memory. The solution is as follows.

1. Select the video channel to change the screen layout to a single screen.
2. Alternatively, change the screen layout to the channels with fewer cameras. If there is no video to be played in the layout, use **Edit Group** function to change the camera position.
3. Or change to live mode and re-enter search mode.

Search Menu



① Layout

Used to change the screen layout to single screen, corridor format, 2x2, 1p5, 1p7, 3x3, 1p12, 4x4, 5x5, or 6x6.

② Previous/Next Group

Loads the previous/next screen group.

③ Display

- **Full Screen On:** Display the screen with a 16:9 aspect ratio. When you place the mouse at the bottom of the screen, the interface screen related to playback will appear. Refer to detailed explanations on the next page.
- **Full Screen Off:** Display Time-Lapse Search screen.
- **Camera OSD On/Off:** Enables/disables the camera OSD feature.
- **Status OSD On/Off:** Enables/disables the status OSD feature.
- **Aspect Ratio On/Off:** Setting On displays video on the camera screen in its original ratio.

④ Alarm

Pressing this button while the alarm has been activated resets all NVR alarm outputs, including the built-in buzzer.

⑤ Database

- **Record:** Search recording data contained in the main recording device.
- **Record Protection:** Protect the recording data even if overwriting is enabled.
- **Other:** Search data recorded while disks used in other systems were connected.

⑥ Panic Record

Use the Panic Record feature.

⑦ Camera


Select a camera channel and display it as a single screen.

⑧ Live Mode

Activates Live mode.

⑨ Search Mode

Search by changing Time-Lapse Search and Event Log Search and Thumbnail search.

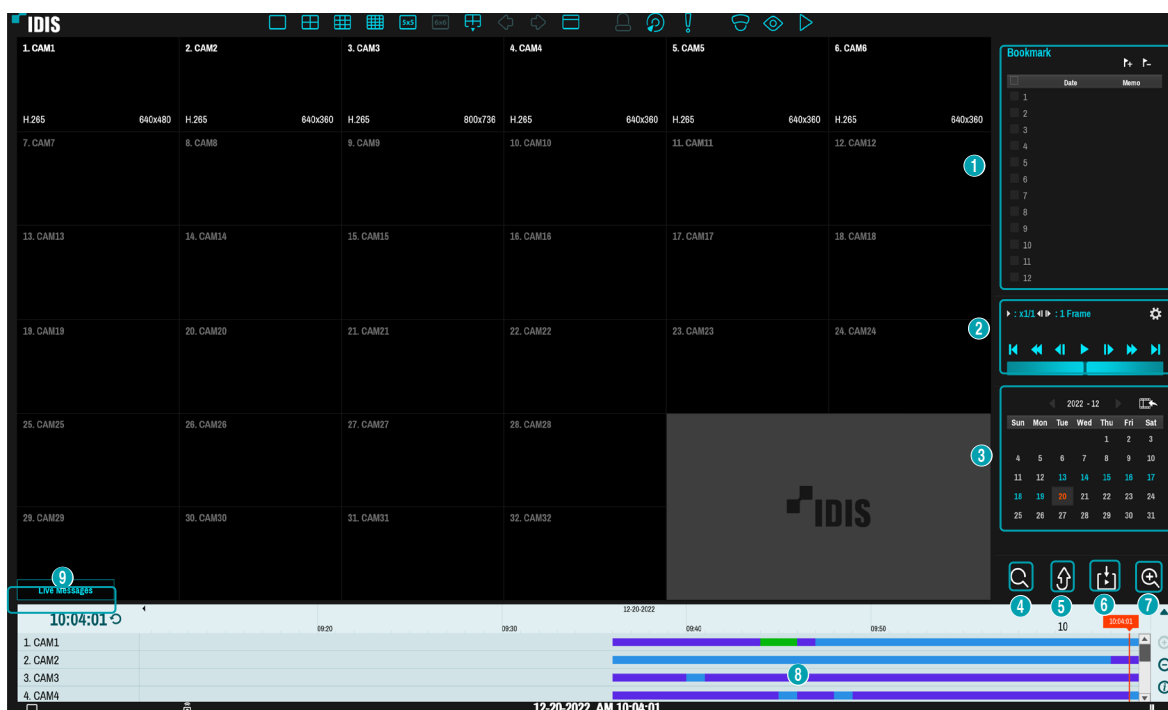

① Bookmark

Select the  icon to add a bookmark to the current playback position.

Select a bookmark from the Bookmark setup window on the right side of the Time-Lapse Search mode screen to move to the registered playback position.

Select Bookmark list and then the  icon to delete the corresponding bookmark.



The maximum number of bookmarks that can be saved is 12.

② Playback Controls

Play and scan through video recordings. Playback controls have the same functions as their remote control counterparts.

● Jog Shuttle

Adjust the playback method and speed.

Jog shuttle's vertical indicator indicates the current playback direction and speed. Vertical indicator placement to the right of the center means the video is being played back in the forward direction. Placement to the left means the opposite. Farther away the vertical indicator from the center, faster the playback speed. Click and drag the vertical indicator to adjust the playback speed. Releasing the mouse button returns the vertical indicator to the center and stops video playback.

● **Option**

Clicking  icon to set Slow Play and Previous/Next Unit.

Option

Slow Play

☒ x1/1

☐ x1/2

☐ x1/3

☐ x1/4

☐ x1/6

☐ x1/8

Prev/Next Unit

☒ 1 Frame

☐ 1 sec.

☐ 10 sec.

☐ 1 min.

☐ 5 min.

☐ 10 min.

☐ 15 min.

☐ 30 min.

☐ 1 hr.

OK

Cancel

● **Slow Play**

Search the playback screen at low speeds. Select the desired playback speed (x1/1, x1/2, x1/3, x1/4, x1/6, x1/8) and then select Play.

● **Prev/Next Unit**

Set the movement range of the previous and next unit. Select the desired unit (From 1 Frame to 1 hour).

③ **Calendar Search**

Use the calendar to search for video recordings by specific dates. Click the year or month on the calendar to move to the desired date.

Dates containing video recordings are highlighted in light blue. Selecting a date containing video recording data loads the earliest recording from that date (paused state). Selected date is highlighted in orange. Clicking  icon on the right side of the calendar changes the calendar to the date of the current playback screen.

④ **Event Search**

Selecting Event Search provides Text-In Search option.

- **Text-In Search:** Perform Text-In Search.

⑤ **Move**

Search video recordings based on date and time. Specify the date and time and then select Go to jump to the corresponding video recording.

Go to the Date/Time

Enter Date/Time to go to

12-20-2022 AM 09:53:38

Go

Cancel

Select a  (bookmark) button on the right side to move to the saved bookmark position.

⑥ **Clip-Copy**


- **A-B Clip Copy:** Designate a start point and an end point and copy the data in between.
- **Clip Copy:** Opens up the Clip Copy Setup window for designating points A and B.

⑦ **Zoom**

Zoom in.

⑧ **Record Table**

Display the current channel's recording information.

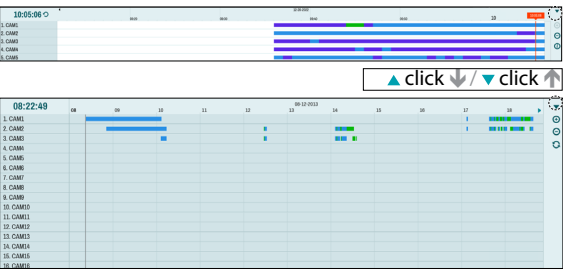

Recording date and time are shown on the top of the search window. The red indicator line on Record Table indicates the current playback position. Use the arrow buttons on the remote control to move the current playback position in units of individual sectors. Alternatively, use the mouse to jump to the desired playback position.



- Farther back the data is on the record table, the more recent it is.
- If the system's clock is changed to a previous date and time, it is possible for multiple recordings with the identical time stamp to exist. Overlapped segments are highlighted in yellow.

Selecting ▲ or ▼ on the upper right portion of the Time-Lapse search window changes the size of search window and displays all or minimum channels.


Using the scroll, the information of other channels which is not shown can be checked in the minimum size of Time-Lapse search window.

Select ⊕ (zoom-in) or ⊖ (zoom-out) to show recording data in minutes or hours.

Selecting zoom-out displays more time in one screen than zoom-in screen.

If recording from points in time prior or after the time frame displayed on the screen is available, scrolls appear on both ends of the date and time information line. Scroll using the arrow buttons on the remote control or by dragging with the mouse to check recording data.

Display the latest update recording information when selecting ↻ (Refresh). Select ⓘ (Help) to check the color information of recorded data.



You can select only the desired type of recorded data for viewing. In the minute search window, you can right-click to check the recording type at a specific recorded time.

⑨ Live Messages

Display a message to make it easier for users to recognize critical events and system information that happen in real time.

Context Menu

Select the Menu button or right-click on the Camera screen to access the context menu.

- **Zoom:** Zoom in.
- **Audio:** Enable/disable audio. Audio playback of the selected camera is available in full screen mode only.
- **Dewarping:** Dewarp fisheye camera images through NVR (Only some device types are supported).
- **Show/Hide Text-In:** Show/hide text-in information contained in the recording.
- **Edit Group:** Rearrange the split screen layout.
- **Live Messages:** Receive the message in real time

Text-In Search

Select **Text-In Search** from the Search menu to bring up the Text-In Search window.

The 'Text-In Search' window displays a table with two columns: 'Time' and 'Transaction'. Below the table is an 'Option' dropdown menu set to 'None' and a 'Close' button.

Select a **Transaction** to display the video recording that corresponds to the selected time and date (paused state).



Text-in information is superimposed on the screen at normal playback speed. The information is not shown under any other playback speed.

Select **Option...** to configure Text-In Search options.

The 'Text-In Search Option' window includes fields for 'From' (First), 'To' (Last), and 'Channels' (1-16). It features a 'Generic Text' table with columns: No., Name, Comp., Value, Column, Line, and a checkbox for 'Case Sensitive'. At the bottom are 'Load', 'Save', 'Search', and 'Cancel' buttons.

- Select **First** under **From** and **Last** under **To** to search the recording from start to finish. Alternatively, you can uncheck the **First** and **Last** options and specify the search time frame manually.
- **Channels:** Select a channel.
- Select **Text-In Device** to select a device type.
- **+ Button:** Add a search variable.
- **Case Sensitive:** Configure case sensitivity.
- **Load:** Retrieve stored search option settings.
- **Save:** Save the current search option settings.

Once all the options have been configured, select **Search** to begin the search and return to the **Text-In Search** setup window.

Clip Copy

Clip Copy

Select **Clip-Copy – Clip Copy** from the Search menu or press the remote control's **CLIP COPY** button while in Live or Playback mode to open up the **Clip Copy** setup window. Specify the **From** and **To** settings.

A-B Clip Copy

Designate a start point and an end point and copy the data in between. Select **Clip-Copy – A-B Clip Copy** from the Search menu to set point A. The  icon will appear on the status indicator area on the upper right corner of the screen. Select **Clip-Copy – A-B Clip Copy** once again to set point B. The Clip Copy Setup window will appear. Select A and B points are automatically applied as **From** and **To** values.

The 'Clip-Copy' window shows 'Data Source' settings: 'From' (First), 'To' (Last), 'Channels' (1-32), and 'Password' (<None>). It also includes 'Dest.' (File name: 20221220.exe) and checkboxes for 'Include ClipPlayer', 'Include Text-In Data', 'Include VA Metadata', 'Sub Stream First', and 'Use Site Info'. A 'Progress' bar and 'Export ClipPlayer' button are at the bottom.

- **Channels:** Specify which channel to save the recording to.
 - **Password:** Enable password protection for the saved video clip and assign a password.
 - **Dest.:** Select which storage media to use. If NetFS feature is in use, you can upload video clips to the registered FTP site.
- ☒
 - When you clip-copy to the NetFS site, the capacity of NetFS site and Disk cannot be found.
 - The maximum size limit for clip-copy files is 30 GB.
 - If the video clip is uploaded after you clip-copy, the video clips will be deleted.
 - If the files are the same files, the video clips cannot be copied.

- **File name:** Designate a name for the file. The name may be up to 63 characters in length.
 - ☒ Special characters such as \, /, :, ;, ", *, ?, !, ", <, >, and | are not permitted.
- **Include ClipPlayer:** Enabling this option will save the video clip as an .exe file with clipplayer.
- **Include Text-In Data:** Enabling this option will save the video clip along with any available text-in data.
- **Include VA MetaData:** Enabling this option will save the video clip along with VA metadata.
- **Sub Stream First:** If the video clip has dual recording information, the sub stream is saved first.
- **Use Site Info:** Adds **Site** info to the Clip Copy file's name.

- ☒ Special characters contained in the location info (such as \, /, :, ;, ", *, ?, !, ", <, >, and |) will be replaced with _ when the information is added to the file name.

- **Export Clipplayer:** Enabling this option will save the copied clip(.cbf) as a clipplayer to be played.

Selecting **Start** displays a calculation on the size of the data to be copied. Check the calculation and then select **Continue** to proceed. While Clip Copy is in progress, you can select **Cancel** to cancel the process or select **Close** to allow the window to run in the background. Selecting **Close** does not cancel Clip Copy. Once the process is complete, you will be prompted with a confirmation window.


- ☒ • **One-Touch Clip Copy** configures the storage range automatically based on the storage drive's capacity. If there is insufficient space available on the selected storage device, you will only be able to Clip Copy an amount of data equaling the remaining space available on the storage device.
- The NVR displays the volume as 30GB regardless of the actual disk volume and the maximum size limit on Clip Copy files is 30GB. Clip Copying a segment that is more than 2GB in size produces multiple files that are up to 2GB in size, each.
- Clip Copy files can be played back on Windows systems. For more information, refer to the IDIS Center operation manual.
- For USB flash memory devices, the NVR supports the FAT32 file format only.



Do not disconnect the USB cable or power off the USB device while USB Clip Copy is in progress. Doing so can cause the NVR to malfunction or critically damage the external USB device's file system. You may be prompted with an error message when trying to back up on the device. If so, you will need to restart the NVR. If the USB hard disk's file system has been damaged, restarting the NVR will not solve the problem and the aforementioned error message will continue to be displayed each time you attempt a backup. If this is the case, you will need to format the HDD or use a recovery program to repair the damage to the drive's file system.

Event Log Search

Select **Search Mode > Event Log Search** to bring up the Event Log Search window.

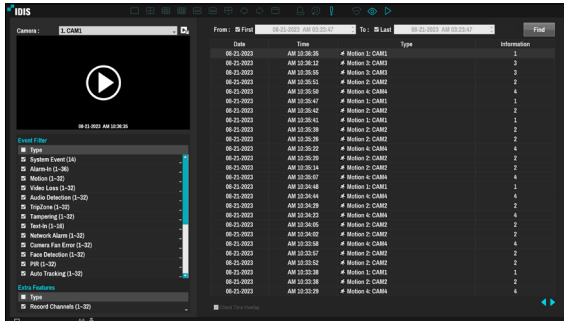

Select an event to display the recording made on the selected time and date (paused state). Select the Play button in the middle of the screen to start playing back the recording. Use the drop-down menu above to load recordings from other cameras.

- Selecting the specific event displays the screen to be stationary. By clicking the  button on the camera right, you can copy the event.
- You can uncheck the **First** and **Last** options at the top of the Event Log Search window and specify the search time frame manually.



Select First for From and Last for To to select the entire recording from start to end.

- If designating **From** or **To** settings manually, you will be able to enable/disable the **Check Time Overlap** option.



If the system's clock has been changed and the designated **From** or **To** point exists at more than one location, you will have to choose one. Only the events that took place between the selected **From** and **To** points will be searched. If **Check Time Overlap** has not been selected, events from the entire **From** and **To** range will be searched.

- Use event filters to include/exclude specific system events such as **Panic Record**, **Check Recording**, **Check Alarm-In**, **Disk Almost Full**, **Disk Bad**, **Disk Temperature**, **Disk S.M.A.R.T.**, **Fan Error**, **Storage Disconnected** and **Disk Config Change** from the search.

Event Filter

- **System Event:** Select which channels to search system events in.
- **Alarm-In:** Select which channels to search alarm-in events in.
- **Motion:** Select which channels to search motion detection events in.
- **Video Loss:** Select which channels to search video loss events in.
- **Audio Detection:** Select which channels to search audio detection events in.
- **Trip Zone:** Select which channels to search trip zone events in.
- **Tampering:** Select which channels to search tampering events in.
- **Text-In:** Select which channels to search text-in events in.
- **Record Channel:** Select which record channels to search events in.
- **Network Alarm:** Select which network alarm to search events in.
- **Exceed Occupancy Limit :** Select which channels to search Exceed Occupancy Limit events in.
- **Exceed Vehicle Count:** Select which channels to search Exceed Vehicle Count events in.
- **Social Distancing Violation :** Select which channels to search Social Distancing Violation events in.
- **Mask Rule Violation :** Select which channels to search Mask Rule Violation events in.
- **VA Loss:** Select which channels to search VA loss events in.
- **Loitering:** Select which channels to search Loitering events in.
- **Line Crossing:** Select which channels to search Line Crossing events in.
- **Intrusion:** Select which channels to search Intrusion events in.
- **Face Detection:** Select which channels to search Face Detection events in.
- **Object Detection:** Select which channels to search Object Detection events in.
- **Queue Congestion:** Select which channels to search Queue Congestion events in.
- **Intercom Call Requested:** Select which channels to

search Intercom Call Requested events in.

- **Client Call Requested:** Select which channels to search Client Call Requested events in.
- **Missed Call Request:** Select which channels to search Missed Call Request events in.
- **Tampering Switch:** Select which channels to search Tampering Switch events in.


- ☒ Selected record channels are searched for events with at least one linked recording. If no camera is selected, only the events with no linked recording camera are searched.

Event Features

- **Recording Fail:** Select which channels to search recording fail events in.

Thumbnail Search

Select **Search Mode** > **Thumbnail Search** to bring up the thumbnail Search window.

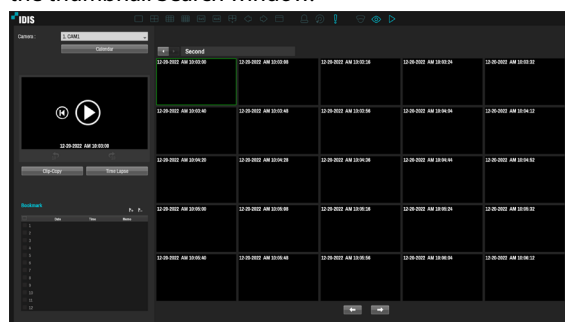


- Click **Calendar** on the left side of the screen to search for video recording specific dates. Dates containing video recordings are highlighted in black. Selected date is highlighted in blue.
- Click **10** on the next to the Calendar button to search the video recording in detail. It allows you to search the video recording in Day -> Hour -> Minutes -> Seconds or Seconds -> Minutes -> Hour -> Day.
- Selected the specific event displays the screen to be stationary. By clicking the play button on the middle of the screen, you can play the video recording. Also, By clicking or , you can jump to the recording in 10 seconds.
- Clicking **Clip-Copy** displays the Clip Copy Setup window to designate points A and B.
- Click **Time Lapse** to go to the time lapse mode.
- Select the icon to add a bookmark to the current playback position. Select a bookmark from the Bookmark setup window on the right side of the Time-Lapse Search mode screen to move to the registered playback position. Select Bookmark list and then the icon to delete the corresponding bookmark.

Overlapped Recording Search

If the system's clock is changed to a point in the past, overlapping recordings may be produced. Overlapped recordings have to be searched in segments.

For example, making a recording from 1 o'clock to 5 o'clock, changing the system's clock at 5 o'clock to 3 o'clock, and then continuing to record until 6 o'clock produces two recordings that overlap between 3 o'clock and 5 o'clock. This results in two segments for the period between 3 and 5.

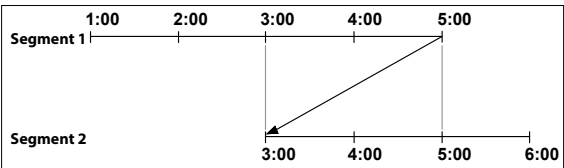

When searching overlapped video recordings, you can choose a specific point in time or a time frame. If you use the **Go to the Date/Time** option and select a point within the overlapped time period (**4 o'clock**, for example), you must specify **4 o'clock** in which of the two existing segments.

Select a Segment

1: Segment 20

2: Segment 21

If you use the **Event Log Search** and select a time frame within the overlapped time period (**4 o'clock to 5 o'clock**, for example), you must choose between the two redundant sets of From and To values. Selectable search ranges are as follows:

- 4 o'clock in segment 1 to 5 o'clock in segment 1
- 4 o'clock in segment 1 to 5 o'clock in segment 2
- 4 o'clock in segment 2 to 5 o'clock in segment 2

Select a Range

1: Scope 1 ~ 3

2: Scope 1 ~ 2

3: Scope 2 ~ 2

Part 4 - IDIS Web

IDIS Web is a program that allows you to view and search video from remote locations over the Internet and can be accessed on various web browser.

System requirements for running IDIS Web are as follows:

- OS: Microsoft® Windows® 10 (Home, Pro), Microsoft® Windows® 11
- CPU: Intel Pentium IV 2.4GHz or above (Core 2 Duo E4600 recommended)
- RAM: 1GB or more
- VGA: 128MB or more (1280x1024, 24bpp or above)
- Chrome: Google Chrome 22.0.1229.0 or above (59.xxx or above recommended)
- Edge: 98.0.1108.43 or above

1 Launch the web browser and then enter the following information in the address bar.

- http://IP Address:Port Number (NVR system's IP address and IDIS Web port number configured under Network > General (Default Value: 12088))
- http://fen.idisglobal.com/FEN Name (FEN Name: NVR name configured on the FEN server)
- http://web.idisglobal.com (will be prompted to enter NVR's IP address or FEN name registered to the FEN server upon login)



Contact your network administrator for the IP address of the NVR you wish to connect to and the IDIS Web port number.

- 2 When prompted with the IDIS Web login window, select **LIVE-PORT** or **PLAY-PORT** as the desired mode. Enter the ID and password and click **LOGIN** to sign in using the selected mode.


If connecting by entering <http://web.idisglobal.com>, enter the NVR's IP address in the Device Address field. Selecting the Use FEN Service option on the login window allows you to enter the NVR name registered to the FEN server instead of its IP address. You will be prompted to enter the FEN server's address and port number under Setup.



- Do not close the login window while IDIS Web is running. Switching over to Web Live or Web Search mode can cause a script error, requiring you to restart the IDIS Web program.
- If running IDIS Web, the bottom section of the screen may get cut off if the address bar or the status bar is shown. In this case, change Internet Options so that the address bar or the status bar is hidden. (**Tools** → **Internet Options** → **Security** → **Custom level...** → **Allow websites to open windows without address or status bars (Enable)**)
- To use IDIS Web on Microsoft Windows Vista or above, launch Internet Explorer by right-clicking on the icon and selecting the **Run as administrator** option. Otherwise, certain IDIS Web functions might not be available.
- Launching a new version of IDIS Web for the first time can cause Internet Explorer to load information from the previous version. In this case, navigate to **Tools** → **Internet Options** → **General**, delete temporary Internet files, and then restart IDIS Web.
- On Microsoft Windows Vista or above, lowered image transmission rate can prevent the screen from being displayed or updated. In this case, we recommend that you disable the computer's auto tuning function. Open the command prompt as an administrator. (**Start** → **Accessories** → **Command Prompt** → **Right-Click** and then select **Run as administrator**) Type in "**netsh int tcp set global autotuninglevel=disable**" and then press Enter. Restart the computer to apply the change. To enable auto tuning again, launch the command prompt as an administrator and then type in "**netsh int tcp set global autotuninglevel=normal**". Restart the computer to apply the change.

Web Live Mode

A remote web monitoring program that allows you to monitor images from remote locales in real-time.

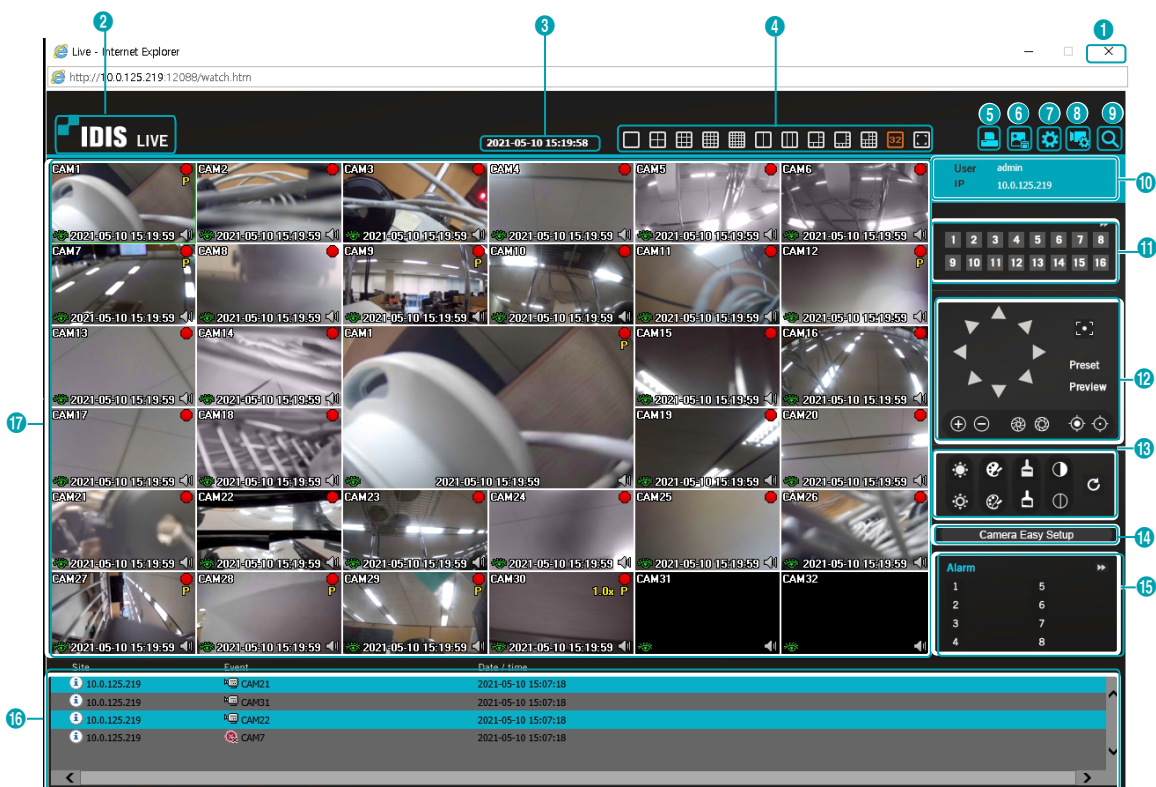

1	Press to terminate IDIS Web.
2	Place the mouse pointer on the to check IDIS Web's version.
3	Displays the current time.
4	Select the desired mode. Changing the mode places the selected camera in the first cell of the layout that will be changed.
5	Click to print the current video screen using a printer connected to the computer.
6	Click to save the current video screen as an image file.
7	Click to configure rendering mode, OSD settings and AlarmOut beep. Select rendering mode to adjust the video output rate or select which OSD elements to display on the screen from the OSD list. Select between Beep On and Beep Off to turn on/off the AlarmOut beep.
8	Click to configure event, camera, stream settings, etc of NVR at remote locales.
9	Click to switch over to Web Search mode.
10	Shows login information.

11	Select the camera you wish to monitor. Use the arrow buttons to navigate to the previous/next camera group.
12	Used to control a PTZ camera at a remote location.
13	Used to adjust live video quality.
14	Used to configure camera easy setup. Select from presets or custom setup for the video mode according to daytime/nighttime. ● Preset: Select from Natural, Vivid or De Noise. ● User Custom: Manually configure the values of each setting (Sharpness, Contrast, Colors and Brightness).
15	Controls remote alarm out devices. Use the arrow buttons to navigate to the previous/next alarm group.
16	Event status window at the bottom of the screen displays a list of events detected at remote locales.

Select a camera from the screen and right-click to bring up the pop-up menu.

- **Change Camera Title:** Used to change the camera's name.



Renaming the camera in Web Live mode does not affect the camera's name on the remote system. If no name is entered for the camera, the name used at the remote locale is shown on the screen.

Change Camera Title	
Enable Audio	
Aspect Ratio	▶
Anti-Aliasing Screen	

- **Enable Audio:** Enables audio transmission with remote locales. Select to display   buttons. (For intercom cameras, the Enable Audio option is not displayed.)

	Enables transmission of audio to the remote locale via microphone.
	Enables playback of audio from the remote locale on speakers.
 / 	Enables two-way audio communication with the remote locale.
	Disables audio transmission.

- **Call:** Monitors video and make calls by connecting the intercom device. Select to display   buttons.  icon is displayed in the upper right corner of the camera screen. The Call option is only displayed on intercom cameras.

	Enables call request. During a call, audio is transmitted through the audio input device.
	Click the call request button again or click the button to end the call.
	Enables playback of audio on the audio output device.




If the remote locale connected to supports audio transmission,  icon appears on the camera screen.

- **Aspect Ratio:** Changes the aspect ratio of the video displayed on the screen.
 - **Fit to Screen:** Fit the video to the size of the camera screen.
 - **Fit to Aspect Ratio:** Resizes camera screen to original aspect ratio of the video.
 - **Half Size (x0.5) - 4 Times Bigger (x4):** Displays the camera videos in the selected size based on the original size of the video. For example, original size (x1) displays the video in its original size. Half size (x0.5) through 4 times larger (x4) options are only available if there is enough space on the camera screen to accommodate the selected size.
- **MultiStream:** If the camera is running on multi-stream mode, you can choose between the streams.
- **Anti-Aliasing Screen:** Removes stair step effect (blocks) that is caused when zooming a video to improve overall quality of video output.
- **Mouse PTZ Control:** Scrolling the mouse wheel zooms in or out.

Web Search Mode

A remote web search program that allows you to search for recordings from remote locales in real-time.

- ☒
- While in Web Search mode, connection to remote locales will terminate automatically after 30 minutes of inactivity.

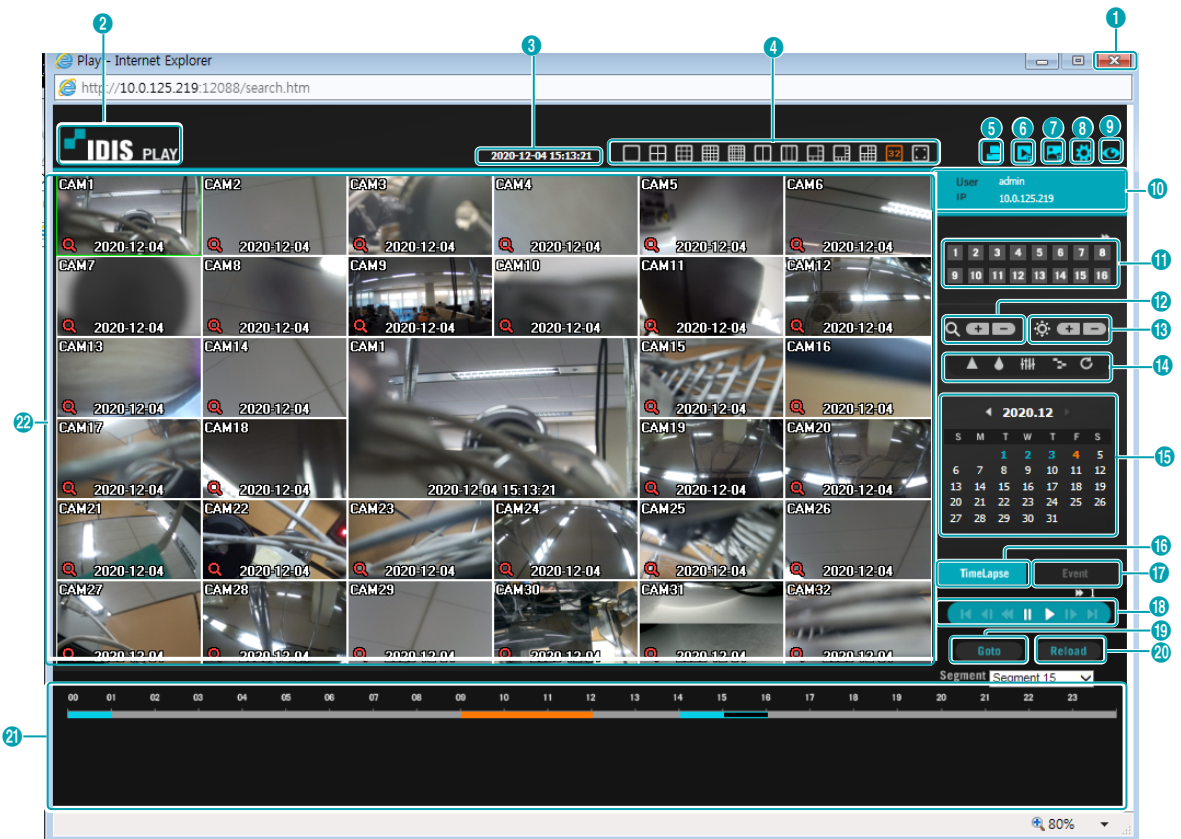

1	Press  to terminate IDIS Web.
2	Place the mouse pointer on the  IDIS logo to check IDIS Web's version.
3	Displays time information of the video recording from the remote NVR.
4	Select the desired mode.
5	Click  to print the current video screen using a printer connected to the computer.
6	Click  to save the video recording as an executable file.
7	Click  to save the current video screen as an image file.

8	Click  to configure rendering mode, OSD settings, responsiveness preference to time-precision setting and dual-stream playback priority. Select rendering mode to adjust the video output rate or select which OSD elements to display on the screen from the OSD list. Select Other Setup to prefer responsiveness to time-precision when performing the GoTo function on a Long-GOP image. Select from Dynamic Control, Main Stream Priority or Sub Stream Priority to set the dual-stream playback priority.																
9	Click  to switch over to Web Live mode.																
10	Shows login information.																
11	Select the camera you wish to search. Use the arrow buttons to navigate to the previous/next camera group.																
12	Zoom in or out on the video.																
13	Adjust image brightness.																
14	Apply image filters (Sharpen, Blur, Equalizer, Interpolation, and Revert) to the images. ☒ Image calibration is applied only during the paused state.																
15	Use the calendar to search for video recordings by specific dates. Dates containing video recordings are highlighted in light blue. Selecting a date containing video recording data loads the earliest recording from that date(paused state). Selected date is highlighted in orange.																
16	Select  to enable time lapse search mode and search/play back video recordings in chronological order. In Time Lapse Search mode, search is conducted by selecting days on the calendar. The time table at the bottom displays recording data information for the selected date. Select a point in time to display video from that moment. If multiple recordings are available for the selected point in time, you can select the desired segment.																
17	Select  to enable event search mode and search for events matching user-designated parameters.																
18	Use the playback controls to play back video. <table><tr><td></td><td>Go to First</td><td></td><td>Play by Frame (forwards)</td></tr><tr><td></td><td>Rewind</td><td></td><td>Fast Forward</td></tr><tr><td></td><td>Play by Frame (backwards)</td><td></td><td>Go to Last</td></tr><tr><td></td><td>Play/Pause</td><td></td><td></td></tr></table>		Go to First		Play by Frame (forwards)		Rewind		Fast Forward		Play by Frame (backwards)		Go to Last		Play/Pause		
	Go to First		Play by Frame (forwards)														
	Rewind		Fast Forward														
	Play by Frame (backwards)		Go to Last														
	Play/Pause																
19	Click  to designate recent recordings you wish to search and then jump to a specific point in the recording.																
20	Click  to reload recent video recordings from remote locales.																
21	Indicates the selected camera's recording data on a time bar. If the camera's system clock has been changed to a point in the past and more than one recording exists at the same point in time as a result, you will be able to choose which segment to search from the segment menu on the upper right portion of the time table.																

22

Select a camera from the screen and right-click to bring up the pop-up menu.

- **Change Camera Title:** Used to change the camera's name.

☒ Renaming the camera in Web Search mode does not affect the camera's name on the remote system. If no name is entered for the camera, the name used at the remote locale is shown on the screen.

- **Enable Audio:** If audio was recorded with the video, enabling this option plays audio upon playback (limited to single-screen playback).
- **Aspect Ratio:** Changes the aspect ratio of the video displayed on the screen.
- **Anti-Aliasing Screen:** Removes stair step effect (blocks) that is caused when zooming a video to improve overall quality of video output.

Change Camera Title
Enable Audio
Aspect Ratio ▶
Anti-Aliasing Screen


Part 5 - Appendix

NAT Function Example

NAT function is to connect to the camera which is internal VIN network from the physically divided WAN network PC (WebSetup / IDIS Web / IDIS Center program / RTSP).

To connect to the camera WebSetup / IDIS Web / IDIS Center program / RTSP function, you need to configure the NAT rule to forward ports from NVR port number to the camera port number.

NAT Configuration Guide

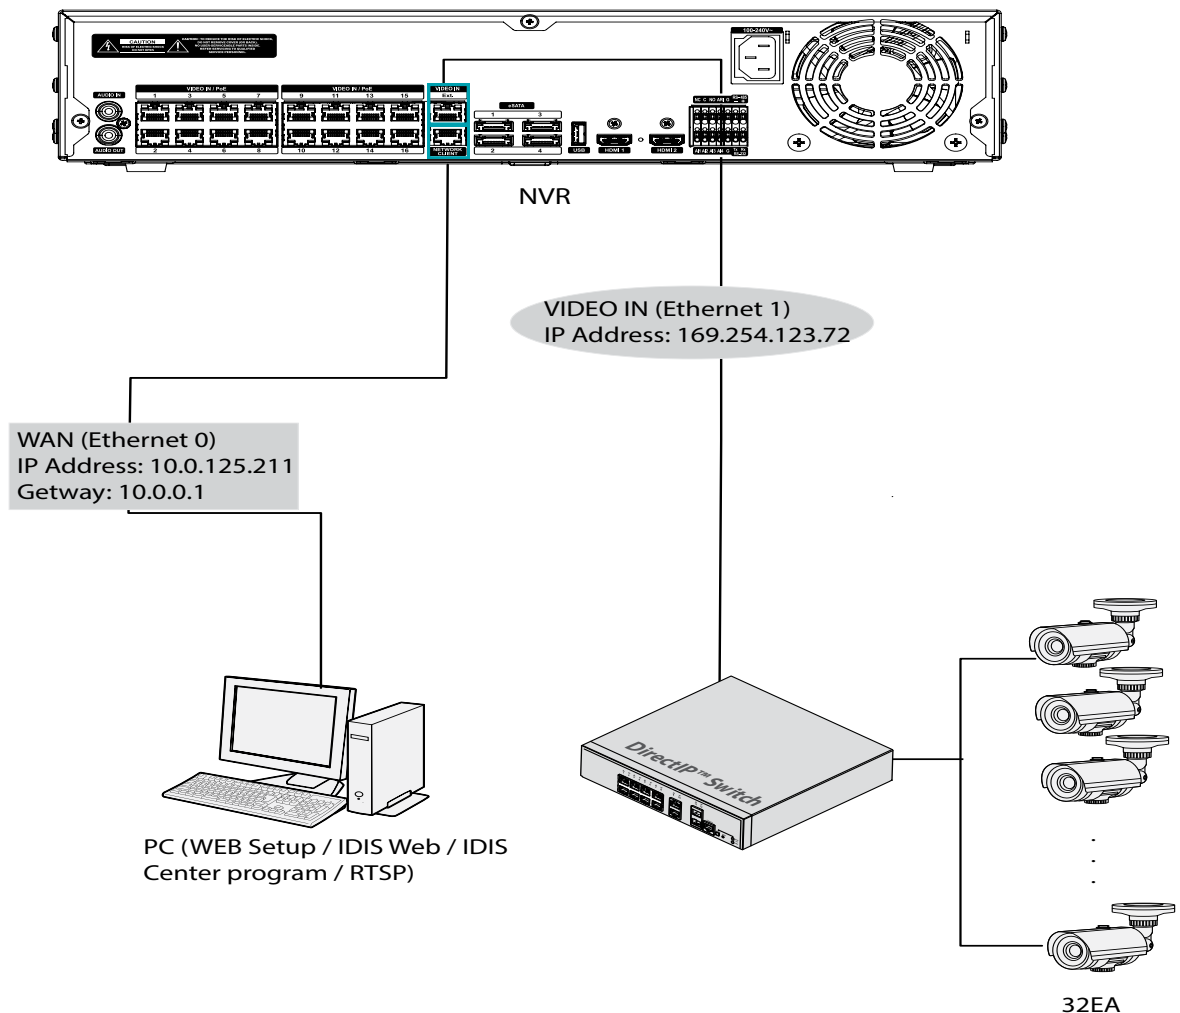

- To use NAT function, the camera gateway address must be set to the VIN network IP address of the NVR.
- For more information on the IP address of the camera and port number, refer to the WebSetup page of the camera manual. Also, check the IP address of the camera in the NVR or default port number on the camera manual.

Camera WebSetup Connection

Access the WebSetup of the camera which is internal VIN network from the PC.

Port Forward through 2 routers "NVR Port Number and HTTP Port Number of the Camera"

Title	CAM2_HTTP	
Type	IPv4	
Action	PORT_FORWARD	
Protocol	TCP	
Interface	eth0 : WAN (NETWORK CLIENT)	eth1 : VIN (Video-In)
IP	0.0.0.0 (NVR)	169.254.66.51
Port	16001	80

Eth 0: WAN Port : 16001


Eth 1: VIN IP : IP address of the camera

Eth 1: VIN Port : HTTP port number of the camera

Approach

You can access the WebSetup page through the following address.: **http://NVR IP address: HTTP Port Number of the Camera/setup/setup.html**

Enter the HTTP port number of the camera **16001** to have port forwarded.

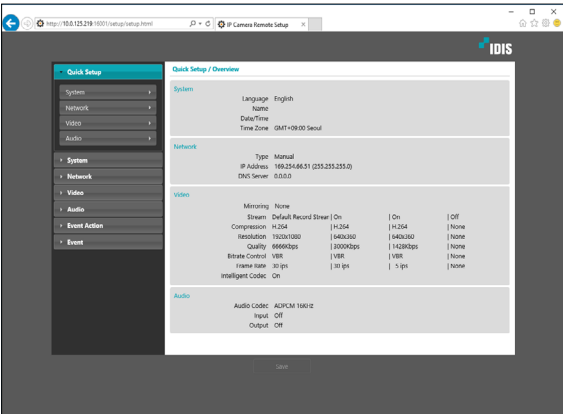

IDIS Web Connection through IDIS Camera

Access the IDIS Web of the camera which is internal VIN network from the PC.

Port Forward through 2 routers "NVR Port Number and HTTP Port Number of the Camera"

Title	CAM2_HTTP	
Type	IPv4	
Action	PORT_FORWARD	
Protocol	TCP	
Interface	eth0 : WAN (NETWORK CLIENT)	eth1 : VIN (Video-In)
IP	0.0.0.0 (NVR)	169.254.66.51
Port	16001	80

Eth 0: WAN Port : 16001

Eth 1: VIN IP : IP address of the camera

Eth 1: VIN Port : HTTP port number of the camera

Port Forward through 2 routers "NVR Port Number and Remote Port Number of the Camera"

Title	CAM2_REMOTE	
Type	IPv4	
Action	PORT_FORWARD	
Protocol	TCP	
Interface	eth0 : WAN (NETWORK CLIENT)	eth1 : VIN (Video-In)
IP	0.0.0.0 (NVR)	169.254.66.51
Port	11002	11002

Eth 0: WAN Port : 11002

Eth 1: VIN IP : The IP address of the camera


Eth 1: VIN Port : Remote port number of the camera

☒ Eth0 port number and the remote port number of the camera must be same.

Approach

You can monitor live videos through the following address.: **http://NVR IP Address: HTTP Port Number of the Camera**

Enter the HTTP port number of the camera **16001** to have port forwarded.

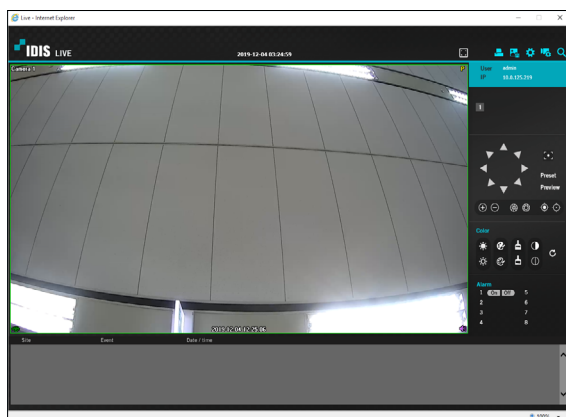

IDIS Center Program Connection through IDIS Camera

Connect to view the video of the camera which is internal VIN network from the clients such as the IDIS Center program.

Port Forward through 2 routers "NVR Port Number and Remote Port Number of the Camera"

Rule - "CAM2_REMOTE"

Title	CAM2_REMOTE		
Type	IPv4		
Action	PORT_FORWARD		
Protocol	TCP		
Interface	eth0 : WAN (NETWORK CLIENT)	->	eth1 : VIN (Video-In)
IP	0.0.0.0 (NVR)	->	188.254.66.51
Port	11002	->	11002

OK Cancel

Eth 0: WAN Port : 11002

Eth 1: VIN IP : IP address of the camera

Eth 1: VIN Port : Remote port number of the camera




Eth0 port number and the remote port number of the camera must be same.

Approach

You can monitoring live videos by using the IDIS Center program.

Enter the remote port number of the camera **11002** to have port forwarded.

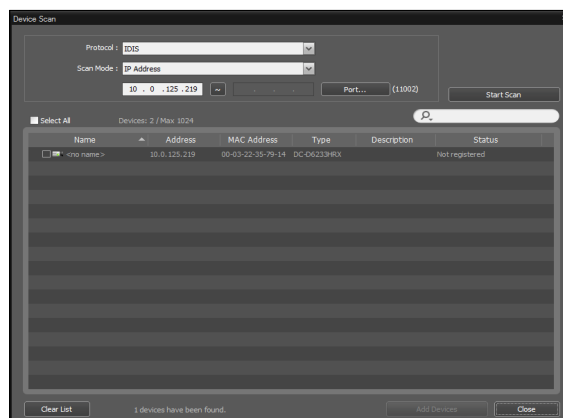

RTSP Connection through IDIS Camera

Connect the video of the camera which is internal VIN network by using the RTSP player from the PC.

Port Forward through 2 routers "NVR Port Number and RTSP Port Number of the Camera

Rule - "CAM2_RTSP"

Title	CAM2_RTSP		
Type	IPv4		
Action	PORT_FORWARD		
Protocol	TCP		
Interface	eth0 : WAN (NETWORK CLIENT)	->	eth1 : VIN (Video-In)
IP	0.0.0.0 (NVR)	->	169.254.66.51
Port	16003	->	554

OKCancel

- Eth 0: WAN Port : 16003
- Eth 1: VIN IP : IP address of the camera
- Eth 1: VIN Port : Remote port number of the camera

Approach

Access RTSP function using media players, such as VLC Player. You can monitor live video images through the following address.: **rtsp://NVR IP Address: RTSP Port Number of the Camera/trackID=channel number**

Enter the RTSP port number of the camera **16003** to have port forwarded.



✓ For more information on RTSP function, refer to **RTSP on page 102** and camera manual.



IDIS Co., Ltd.

For more information, please visit at
www.idisglobal.com