


D113 Supervision module, battery lead

www.boschsecurity.com



BOSCH
Invented for life

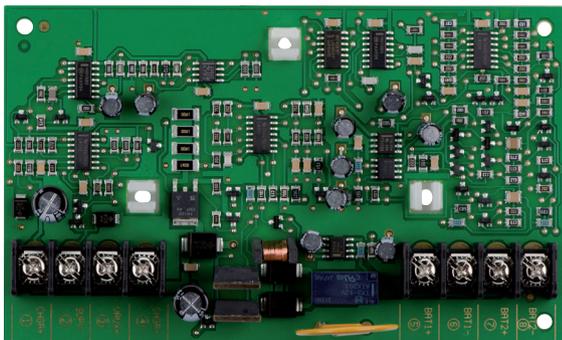

- ▶ Works with 12 V nominal systems
- ▶ Meets NFPA 72 requirements for battery lead supervision for fire alarm control panels (FACPs)

This module provides supervision of the battery lead connection in a system controlled by a Bosch Security Systems, Inc. 12 VDC control panel. This module may be used with other panels when referenced in the panel's installation/operation instructions. The module meets NFPA 72 requirements for battery lead supervision for fire alarm control panels (FACPs).

Functions

Trouble and Supervisory Conditions

When the D113 detects a disconnected battery lead, it creates a shorted condition on the supervising zone or point. The panel should be programmed according to the appropriate programming guide to generate a trouble response to a shorted condition on the loop. The D113 is reset by reconnecting the battery lead and clearing the trouble condition at the FACP.

Certifications and approvals

Region	Regulatory compliance/quality marks
USA	UL AMCX: Central Station Alarm Units (ANSI/UL 1610 and ANSI/UL 1635), AOTX: Local Alarm Units (ANSI/UL 609 and ANSI/UL 464), APOU: Proprietary Alarm Units (ANSI/UL 1076), NBSX: Household Burglar Alarm System Units (ANSI/UL 1023), UOXX: Control Unit Ac-

Region	Regulatory compliance/quality marks
	cessories, System (ANSI/UL 864), and UTOU: Control Units and Accessories, Household System Type (ANSI/UL 985)
UL	UL 985 - Household Fire Warning System Units (6th edition)
CSFM	California State Fire Marshal
NYC-MEA	12-92-E, Vol. XII
NYC-MEA	12-92-E, Vol. XV

Installation/configuration notes

Compatible products

The following products are compatible with the D113 module:

Category	Product
Batteries	D126 Standby Battery (12 V, 7 Ah)
	D1218 Battery (12 V, 18 Ah)
Control panels	G series panels ¹

Category	Product
	¹ G-series = D9412GV4, D7412GV4, D7212GV4 ² , D9412GV3, D7412GV3, D7212GV3 ² , D9412GV2, D7412GV2, D7212GV2 ² , D9412G, D7412G, D7212G ²

² These products are legacy products and have been investigated for compatibility only to UL864 8th edition.

Parts included

Quantity	Component
1	D113 module
1	Snap track
1	Hardware pack (3 screws and module connection wires)
1	Literature pack (Installation Manual)

Technical specifications

Electrical

Voltage (input range)	10.2 V min to 13.9 V max
Voltage (battery)	12 V nominal
Current draw ¹	45 mA

¹ For battery calc, use 45 mA for alarm and 45 mA for standby

Ordering information

D113 Supervision module, battery lead

Supervises wiring connections for two 12 V batteries connected to the same set of charging terminals.
Order number **D113**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia