



STI WIRELESS RECEIVERS



STI-34108

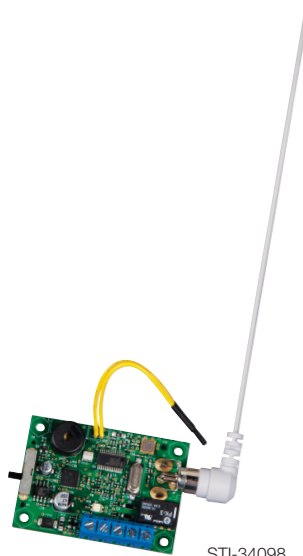

STI-34098



STI-34188



STI-V34104

PRODUCT OVERVIEW

The receivers allow you to monitor up to 8 different STI wireless alert devices at a single, convenient location. Supervised for low battery and signal reception, they have an audible chime tone or 12 VDC output for siren. The 4-Channel Voice Receiver sounds a tune or a prerecorded programmable voice message. Offers ten tones/tunes or 53 selectable words (English or Spanish) to create a custom message up to four words. The 8-Channel Receiver offers a mirror function that can work with up to four additional 8-Channel Receivers. Devices can be latching or momentary by zone. STI offers multiple wireless products designed to alert you of several different conditions (such as: an open garage door, mail delivered, a car in the driveway, open exit door, removed fire extinguisher or activated push button, etc.).

HOW IT WORKS

The receivers (excludes Single Channel Slave) supervise transmitter battery and signal reception (low battery is indicated with a short beep between 12 and 24 hours of detection).

KEY FEATURES

General Information

- Monitor 4 or 8 devices at a single, convenient location.
- Supervised for low battery and signal reception.

Installation

- Easy installation.

Electronics

- Operates up to 1000' (line of sight), 433MHz.
- Audible chime tone and 12 volt output.
- Devices can be latching or momentary by each zone (STI-V34104 & STI-34108).
- Includes 12 volt power supply.

Options

STI-V34104

- Monitors up to 4 devices.
- Ten tones/tunes or 53 selectable words (English or Spanish).
- Words can be programmed in sets of up to four to create custom message.

STI-34108

- Monitors up to 8 devices with 8 zone LED indicators.
- Mirror function (works with up to 4 additional 8-Channel Receivers).
- Dual antennas for increased signal strength.
- Form "C" contact for remote monitoring.
- 300mA, 12 volt available for siren output (with 500mA, 12 volt supply).
- Measures 5 1/4 x 5 3/4 x 1 1/4".
- Key fob available for alert or on/off.

STI-34098

- Allows transmitters to connect to control panel.
- Measures: 2 1/4 H x 1 1/2 W x 1/2" D.

STI-34188

- 8-Zone Relay Board for STI-34108.
- 8 momentary Form "C" relay contacts rated 3A, 125 VAC, 3A 28VDC.
- Measures: 5 7/8 H x 2 W x 1/2" D.

STI Wireless Receivers

Dimensions and Technical Information

MODELS AVAILABLE

Receivers

- STI-34108** 8-Channel Receiver
- STI-V34104** 4-Channel Voice Receiver
- STI-34098** Single Channel Slave Receiver

Sensors

- STI-34151** Wireless Driveway Monitor Sensor (battery powered)
- STI-34201** Wireless Mail Alert Sensor
- STI-34301** Wireless Garage Sentry Alert Sensor
- STI-34401** Wireless Universal Alert Sensor
- STI-34501** Wireless Door Entry Alert® Sensor
- STI-34601** Wireless Doorbell Button Alert Sensor
- STI-34752** Wireless Indoor/Outdoor Motion Detector Alert Sensor
- STI-6200WIR** Wireless Fire Extinguisher Theft Stopper® Sensor
- STI-6400WIR** Wireless Exit Stopper® Door Alarm Sensor
- STI-6517B** Wireless Stopper® Station Shield with Sound and Wireless Transmitter

WARRANTY

TESTING

- STI-34108, STI-V34104**
- CE
- FCC & IC Compliant

4-Channel Voice Receiver Kits

- STI-V34150** Wireless Driveway Monitor (battery powered)
- STI-V34200** Wireless Mail Alert
- STI-V34300** Wireless Garage Sentry Alert
- STI-V34400** Wireless Universal Alert
- STI-V34500** Wireless Door Entry Alert®
- STI-V34600** Wireless Doorbell Button Alert
- STI-V34760** Wireless Indoor/Outdoor Motion Detector Alert

Single Channel Slave Receiver Kits

- STI-34159** Wireless Driveway Monitor (battery powered)
- STI-34209** Wireless Mail Alert
- STI-34309** Wireless Garage Sentry® Alert
- STI-34409** Wireless Universal Alert
- STI-34609** Wireless Doorbell Button Alert
- STI-34759** Wireless Indoor/Outdoor Motion Detector Alert
- STI-6400WIR9** Wireless Exit Stopper® multifunction door alarm with Single Channel Slave Receiver

Accessories

- STI-34099** Single Channel Slave Receiver Case
- STI-34105** Voltamax 12 VDC (500mA) power supply
- STI-30105** Extended Antenna (7 foot cord length)
- STI-34106** Key Fob
- STI-34188** 8-Zone Relay Board for STI-34108



**Safety Technology
International**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
info@sti-usa.com
www.sti-usa.com

Taylor House
34 Sherwood Road
Bromsgrove, Worcestershire
B60 3DR, England

Tel: +44 (0)1527 520 999
Fax: +44 (0)1527 501 999
info@sti-emea.com
www.sti-emea.com