


AXIS Electrical safety kit

Protection against electrical surges

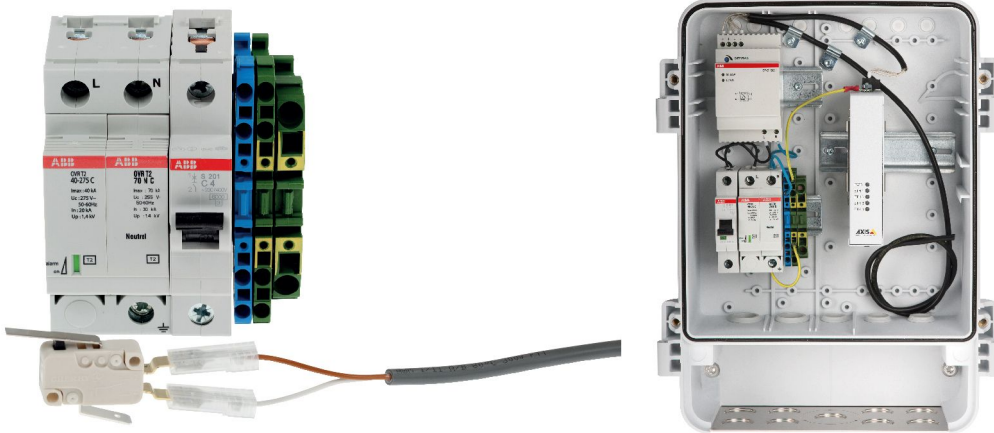

- > Suitable for
AXIS T98A-VE Cabinet Series
- > Surge protection
- > Fuse
- > Alarm-door switch

AXIS Electrical Safety Kit A 120 V AC and AXIS Electrical Safety Kit B 230 V AC are available for your AXIS T98A-VE Cabinet Series for enhanced security.

The optional electrical safety kits include surge protection, a fuse and an alarm-door switch to detect intrusion in the cabinet or damage to it. The safety kits can be connected to main power by a certified electrician.

Technical Specifications - AXIS Electrical safety kit

Models	AXIS Electrical safety kit A 120 V AC AXIS Electrical safety kit B 230 V AC	Dimensions	MCB fuse: 92x17.5x72 mm (3.6x0.7x2.9 in) Surge protector: 85x35x65 mm (3.3x1.4x2.6 in) Terminal block 4x2.5 mm ² (L): 80x6x37 mm (3.1x0.2x1.5 in) Terminal block 4x2.5 mm ² (GND): 80x6x37 mm (3.1x0.2x1.5 in) Terminal block 2x6 mm ² (GND): 67x8x37 mm (2.6x0.3x1.5 in) Door switch: 41x10x30 mm (1.6x0.4x1.2 in) Door switch cable: 1000 mm (40 in) Screw: 30 mm (1.2 in)
General		Included accessories	MCB fuse, Surge protector class 2, Terminal block 4x2.5 mm ² (L), Terminal block 4x2.5 mm ² (GND), Terminal block 2x6 mm ² (GND), Door switch, Door switch cable, Screw
Operating conditions	MCB fuse: -40 °C to 75 °C (-40 °F to 167 °F) Surge protector: -40 °C to 80 °C (-40 °F to 176 °F) Door switch: -40 °C to 85 °C (-40 °F to 185 °F)		
Approvals	MCB fuse: IEC/EN 60947-2, UL 489, CSA 22.2 No. 5 Surge protector: IEC 61643-1 Ed2, UL 1449 Ed3 Door switch: EN 61058, UL 1054		
Weight	390 g (0.9 lb) Door switch: 10 g (0.02 lb)		

More information is available at www.axis.com