


PD16WCB

UL Listed Power Distribution Module

Description

Altronix PD16WCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into sixteen (16) PTC protected Class 2 Rated power-limited outputs.

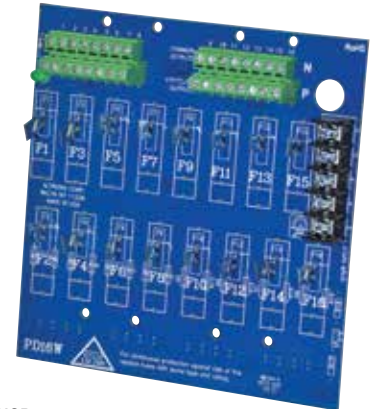

PD16WCB

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or
24VAC or 28VAC, up to 12A.

Outputs

Sixteen (16) PTC protected Class 2 Rated power-limited outputs (auto-resettable).

2A per output max.

Total output current should not exceed max current rating of power supply employed.

PTCs are rated @ 2A/250V.

Indicators (LED)

DC Output Power LED.

Agency Listings

UL:

UL294 Access Control

UL603 Burglar Alarm

UL1481 Fire Alarm

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983.

Power Supplies for Burglar Alarm Systems ULC-5318-96.

Physical and Environmental

Dimensions (L x W x H)

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm).

Product Weight 0.4 lbs. (0.18 kg).

Shipping Weight 0.5 lbs. (0.23 kg).

Temperature

Operating 0°C to 49°C (32°F to 120°F).

Storage -20°C to 70°C (-4°F to 158°F).

Relative Humidity 85% +/-5%.

Mounting hardware included.

PD16WCB

UL Listed Power Distribution Module

Board Dimensions (L x W x H) and Drawing

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)

