


RB7

Ultra Sensitive Relay Module

Description

Altronix RB7 Multiple Relay Module incorporates seven (7) isolated form "C" relay outputs which can be activated via positive (+) low current trigger inputs. Typical applications include the switching of alarm devices (e.g. annunciator, signals, etc.) from PGM outputs of alarm panels or from another source.

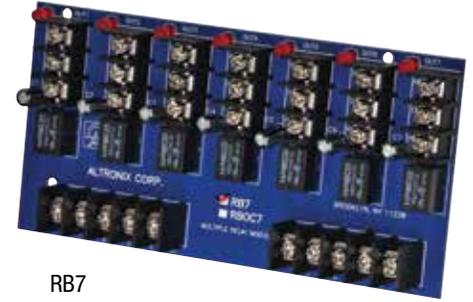

RB7

Specifications

Input

Voltage	12VDC or 24VDC operation.
Current Draw	120mA.

Contact Rating

Seven (7) isolated form "C" 1A/120VAC or 28VDC contacts.
 Seven (7) independent (3VDC to 24VDC@ 2mA minimum) positive (+) triggers.

Indicators (LED)

Trigger	Seven (7) individual trigger LEDs.
---------	------------------------------------

Physical and Environmental

Dimensions (L x W x H)

6.5" x 3.25" x 1" (165.1mm x 82.55mm x 25.4mm).

Product Weight 0.15 lbs. (0.06 kg).

Shipping Weight 0.25 lbs. (0.11 kg).

Temperature

Operating -25°C to 55°C (-13°F to 131°F).

Storage -25°C to 70°C (-13°F to 158°F).

Relative Humidity 85% +/-5%.