


RBTUL

Relay Module

Description

Altronix RBTUL sensitive and ultra sensitive UL Listed relay is designed for continuous duty. This rugged and dependable relay will handle any switching application.

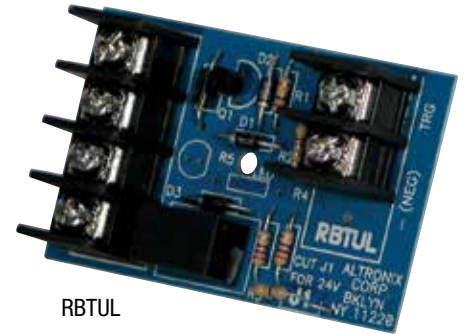

RBTUL

Specifications

Input

Voltage	12VDC or 24VDC operation.
Current Draw	30mA.

Contact Rating 1A/28VDC SPDT contacts.

Agency Listings

UL365	Burglar Alarm System Accessory.
-------	---------------------------------

Physical and Environmental

Dimensions (L x W x H)

2.75" x 2" x 1" (69.85mm x 50.08mm x 25.4mm).

Product Weight 0.15 lbs. (0.06 kg).

Shipping Weight 0.25 lbs. (0.11 kg).

Temperature

Operating -25°C to 55°C (-13°F to 131°F).

Storage -25°C to 70°C (-13°F to 158°F).

Relative Humidity 85% +/-5%.