



# INSTALLATION INSTRUCTIONS MODEL NTS-2

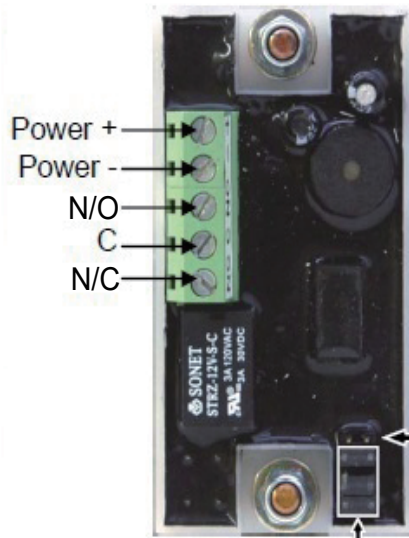

To ensure proper wire connection note that the silver contact of the terminal block is all the way down when loosened. Proper connection is made when tightening the screw on the terminal block such that the silver contact rises upward to clamp the wire in place.

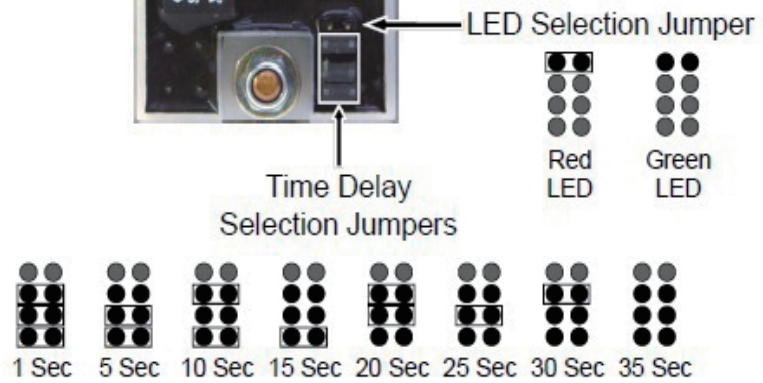

### Specifications -

- Input Voltage: 12-24 Volts DC
- SPDT Contact Rating: 2A @ 30 Volts AC or DC
- Sensor Detection Range: Up to approximately 4 inches
- Operating Temperature: -25°C to +55°C
- Current Draw: 50mA @12VDC, 65mA @ 24VDC

### Operation -

To operate the switch, make a slow waving motion with your hand within approximately 4 inches of the front of the plate. A tone will sound indicating that the relay has been activated. Switch relay will activate for the amount of time as set by the time delay jumpers.

The LED circle on the front of the plate can be set to either the color red (flashes green in 1 second intervals when relay is active) or green (flashes red in 1 second intervals when relay is active).



**Alarm Controls**  
 10027 South 51st Street. #102  
 Phoenix AZ 85044  
 (800) 645-5538  
[www.alarmcontrols.com](http://www.alarmcontrols.com)