

Installation Instructions for 1500 Series Door Holder Extension Kits

Description

The Edwards 1500 Series Door Holder Extension Kits are used where it is desired to hold doors open and where a standoff distance between the magnet assembly and the armature base is required. The extension rod kit can be used with Edwards 1504, 1505, 1508 and 1509 Series Door Holders. Parts from these door holders are used with the extension kits to form a complete unit.

Specifications

Model Number	Extension Range
1500-1	1 1/2" (38 mm) Fixed
1500-2	2" (51 mm) Fixed
1500-7	6.37 - 8.00" (162 - 203 mm)
1500-12	8.37 - 12" (213 - 305 mm)

Installation



WARNING

The extension kits project a significant distance from the doors they are mounted on and should, therefore, be mounted as high as possible to preclude interference or personal injury.

1. Install the extension kit as follows.
 - a. Remove the #10-32 x 1 1/2" (38 mm) armature securing screw and remove the catch plate from the armature base (Figure 1).
 - b. Insert spherical bushings (removed in Step 1.a) as shown in Figure 2 or Figure 3 as applicable. If bushings are damaged, replace with bushings supplied with the door holder extension kit.
2. For more detailed information on installation of the door holders, see the instructions supplied with the door holder.
 1. Using a 5/32" (4 mm) Allen Wrench (supplied), lock the extension arm into position by tightening the armature securing screw (Figure 2). **Do not overtighten.**
 2. Perform an operational check of the Electromagnetic Door Holder as outlined in the installation instruction provided with the door holder.

- c. Insert the extension rod into the armature base and secure with #10-32 x 1 1/2" (38 mm) armature securing screw (Figures 1 - 3).
- d. Insert spherical bushings (supplied) and flat washers (supplied with 1500-7 and 1500-12 only) into the extension rod assembly as shown in Figure 2 or Figure 3, as applicable. Secure catch plate in extension rod using #10-32UNF x 1" (25 mm) securing screw (Figure 2).
- e. For adjustable units only, adjust the extension length by loosening the knurled locking nut, extending the rod to the desired length and retightening the knurled locking nut (Figure 2).

NOTE: *Proper alignment of the catch plate and the electromagnet helps ensure sufficient holding force.*

- f. Align the catch plate with the electromagnet by moving the extension arm up or down and back or forth while simultaneously adjusting the catch plate against the magnet. There should be no gap between the catch plate and the magnet.
- g. After the desired extension length and contact alignment have been achieved, perform the following (Figure 2):
 1. Using a 5/32" (4 mm) Allen Wrench (supplied), lock the extension arm into position by tightening the armature securing screw (Figure 2). **Do not overtighten.**
- h. Perform an operational check of the Electromagnetic Door Holder as outlined in the installation instruction provided with the door holder.

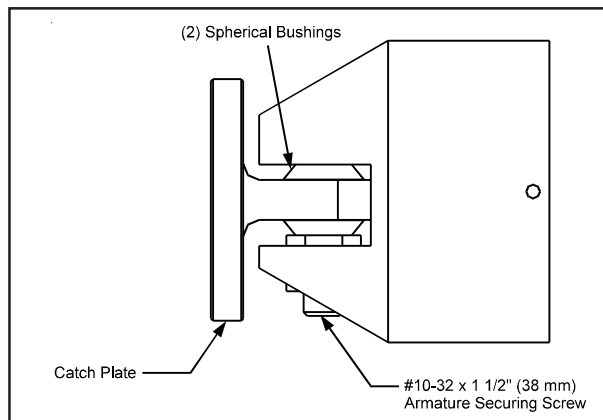


Figure 1. Armature Base Assembly

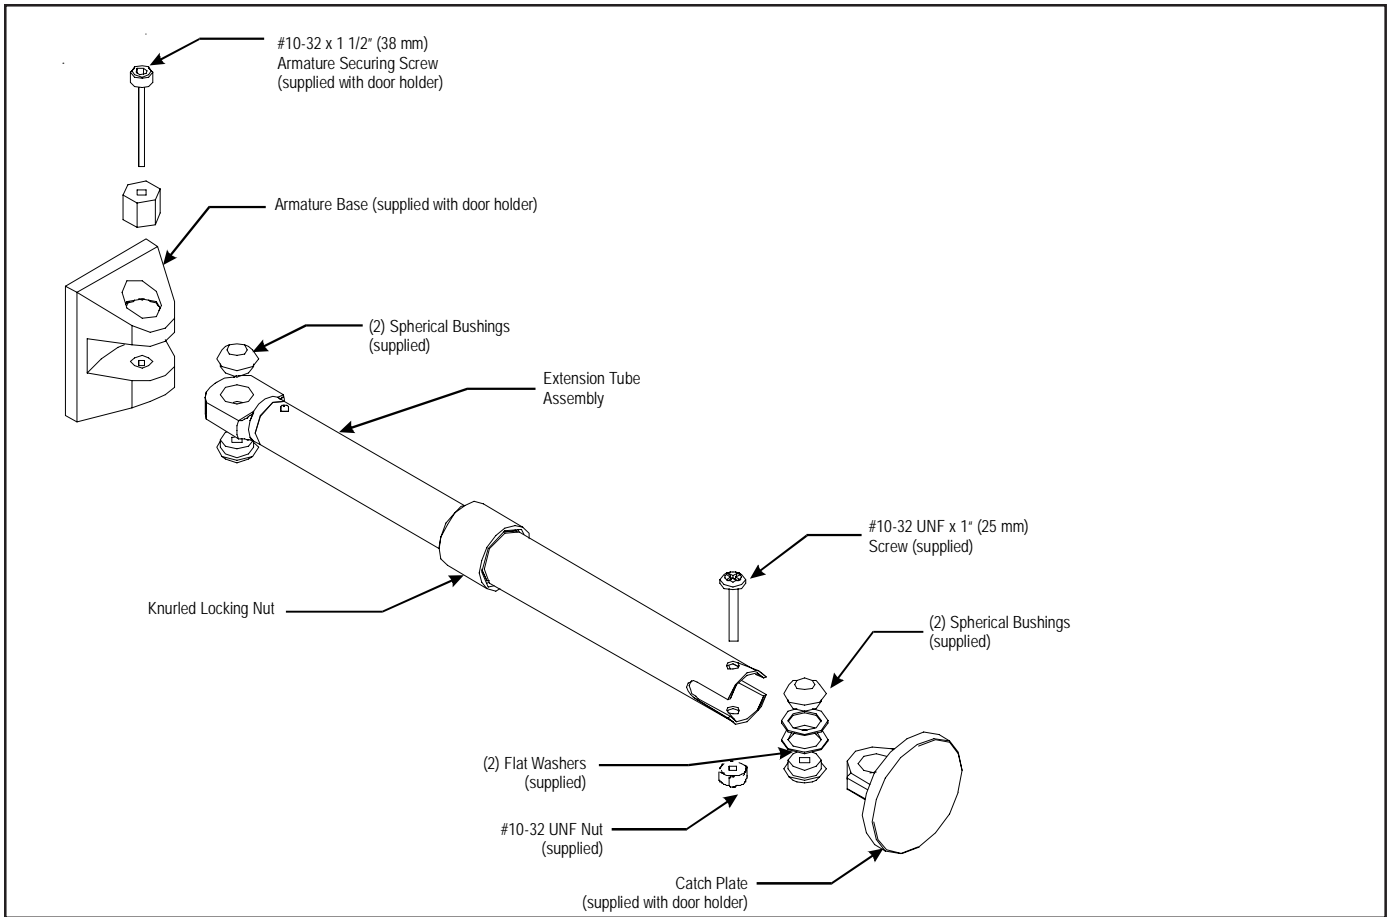


Figure 2. Extension Rod Assembly (Adjustable 1500-7 and 1500-12 Model)

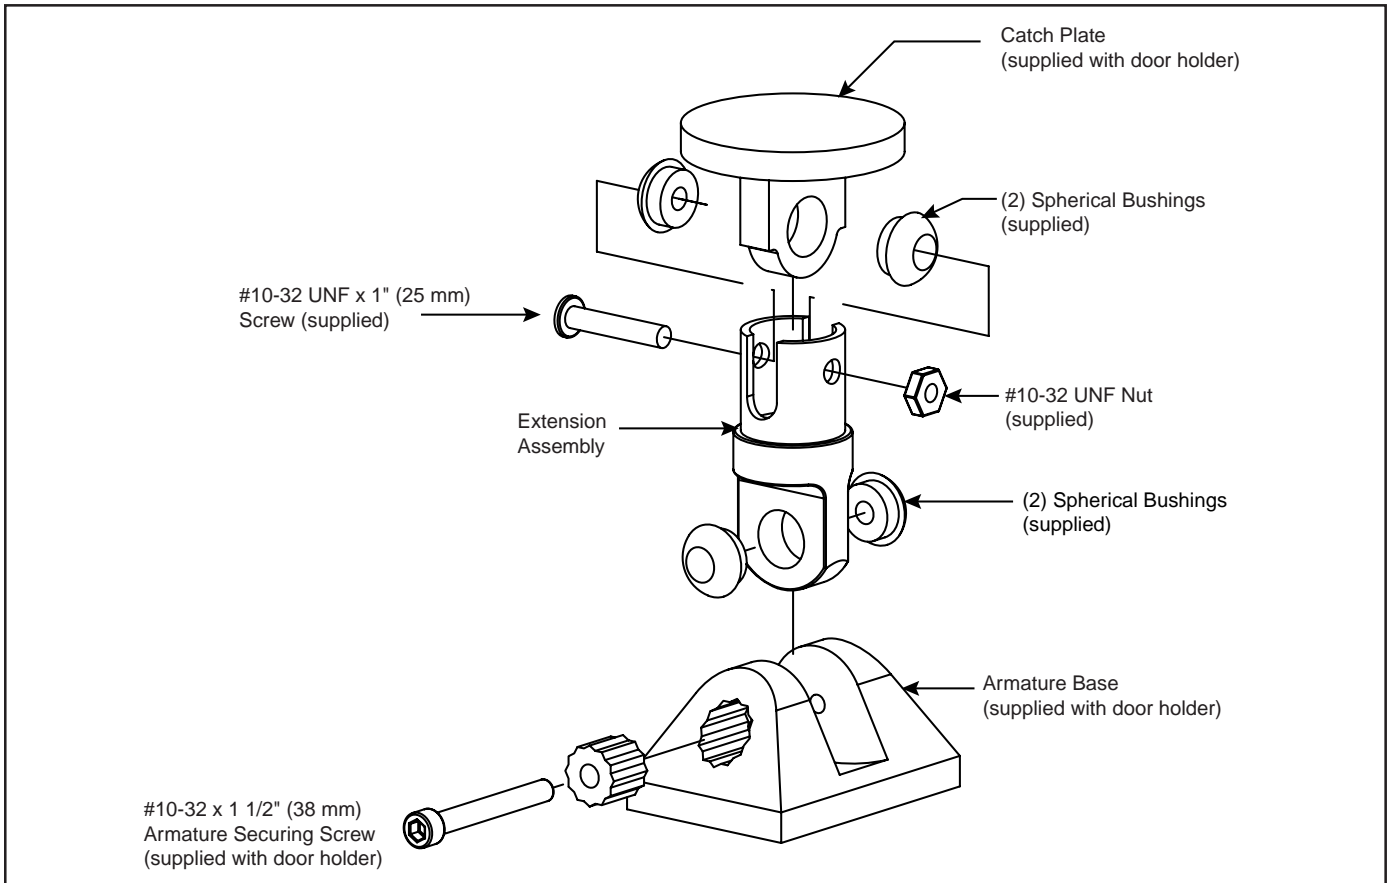


Figure 3. Extension Rod Assembly (Adjustable 1500-1 and 1500-2 Model)