



TROVE™

Access & Power Integration

TMV2

- Altronix/Mercury/HID VertX® door backplane for Trove2 and Trove3

Installation Guide

Overview:

TMV2 accommodates a variety of Mercury/HID VertX® boards with or without Altronix sub-assemblies for access systems of up to twelve (12) doors.

Specifications:

- 16 Gauge backplane.
Dimensions (H x W x D): 23.75" x 18.125" x 0.3125" (603.3mm x 460.3mm x 7.9mm).

Backplane Accommodates a Combination of the Following:

- Up to three (3) ACM4(CB), MOM5, PD4UL(CB), PD8UL(CB), PDS8(CB), VR6, GB1 (Genetec Synergis Cloud Link adapter plate).
- Up to six (6) Mercury EP1502, MR52, MR16IN, MR16OUT, EP2500, MUX8.
- Up to six (6) Vertx® V100, V200, V300, V1000, V2000.

Hardware:



TMV2: Configuration of Mercury and/or Altronix Boards

Mercury Access Controllers:

1. Fasten snap on spacers onto metal pems configuration (A) (B) of backplane depending on the access controller (*Fig. 1, pg. 2*).
2. Position access controller module over corresponding spacers and depress onto snap on spacers (*Fig. 1a, pg. 2*).
3. Mount backplane to enclosure with hardware.

Altronix Sub-Assemblies and/or Adapters:



1. Fasten nylon / snap on spacers to pems which match the hole pattern for Altronix Sub-Assemblies (*Fig. 1, 1a, pg. 2*).
2. Mount boards to spacers utilizing pan head screws provided with the product or by depressing board onto snap on spacer (*Fig. 1, pg. 2*).

Note: For GB1 please use spacers supplied with the adapter.

Access Controller Position Chart for the Following Models:

Mercury	
Access Controller	Pem Mounting
EP1502, MR52, MR16IN, MR16OUT	Ⓐ
EP2500, MUX8	Ⓑ
Altronix	
Sub-Assembly or Adapter	Pem Mounting
ACM4(CB), MOM5, PD4UL(CB), PD8UL(CB), PDS8(CB), VR6, GB1 (Genetec Synergis Cloud Link adapter plate)	Ⓒ

Fig. 1

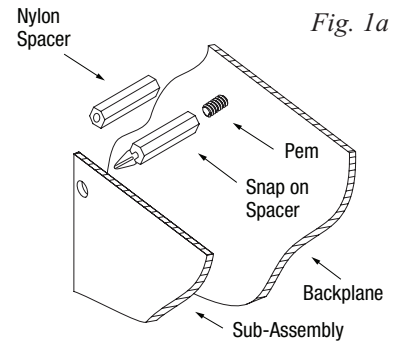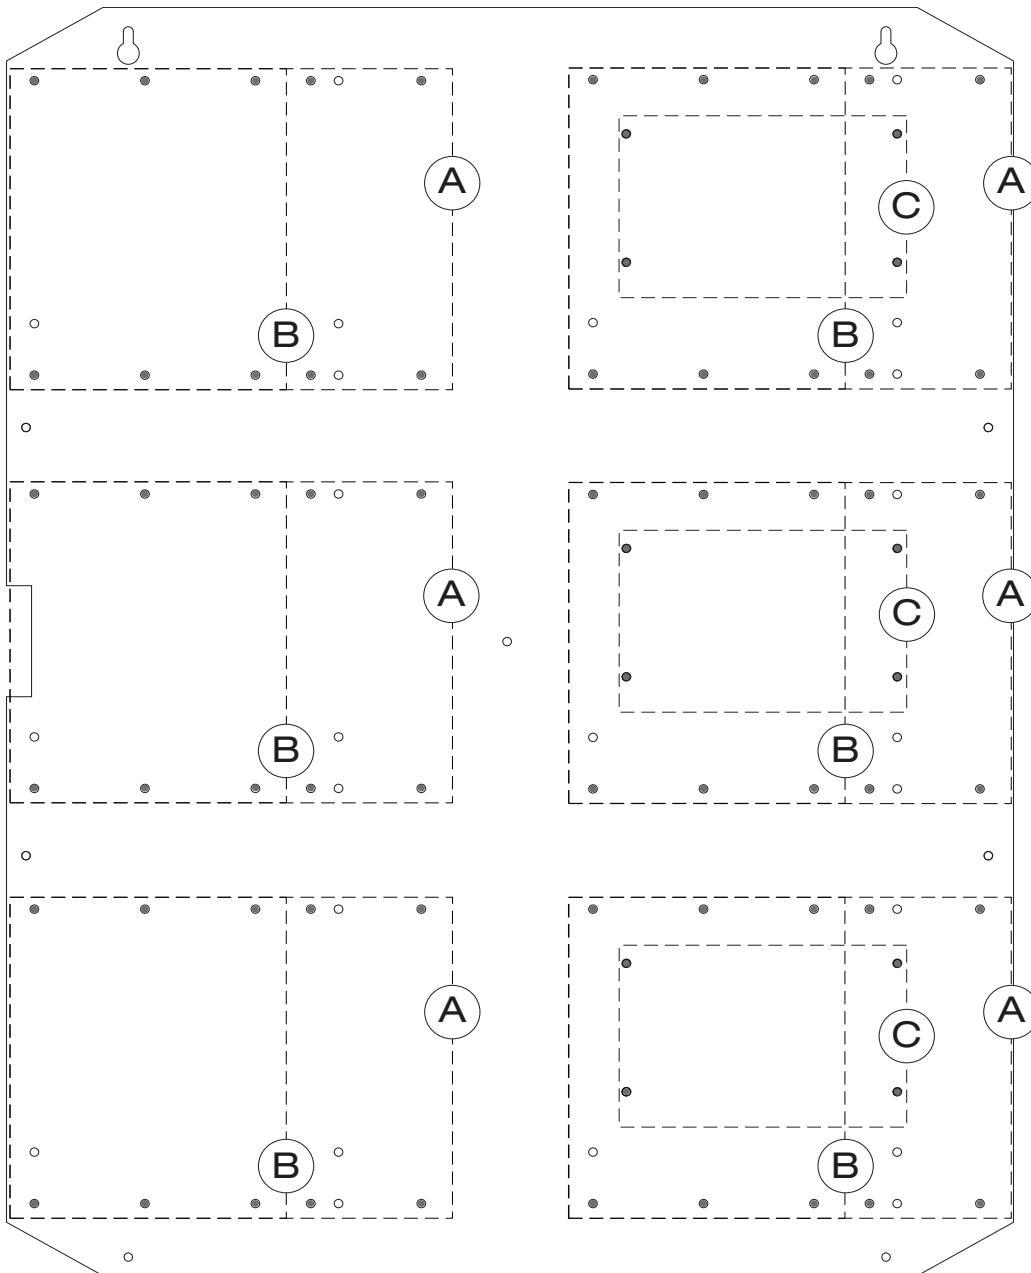

TMV2: Configuration of HID VertX® and/or Altronix Boards

HID VertX® Access Controllers:

1. Fasten spacers (provided) to pems which match the hole pattern for HID VertX® V100, V200, V300, V1000 or V2000 boards (*Fig. 2, pg. 3*).
2. Mount boards to spacers (*Fig. 2, pg. 3*) utilizing 7/8" pan head screws (provided).
3. Fasten backplane to Trove2 enclosure door utilizing lock nuts (provided).

Altronix Sub-Assemblies and/or Adapters:

1. Fasten nylon / snap on spacers to pems which match the hole pattern for Altronix Sub-Assemblies (*Fig. 1, 1a, pg. 2*).
2. Mount boards to spacers utilizing pan head screws provided with the product or by depressing board onto snap on spacer (*Fig. 1, pg. 2*).

Note: For GB1 please use spacers supplied with the adapter.

Access Controller Position Chart for the Following Models:

HID VertX®	
Access Controller	Pem Mounting
V100, V200, V300, V1000 or V2000	Ⓐ
Altronix	
Sub-Assembly or Adapter	Pem Mounting
ACM4(CB), MOM5, PD4UL(CB), PD8UL(CB), PDS8(CB), VR6, GB1 (Genetec Synergis Cloud Link adapter plate)	Ⓑ

Fig. 2



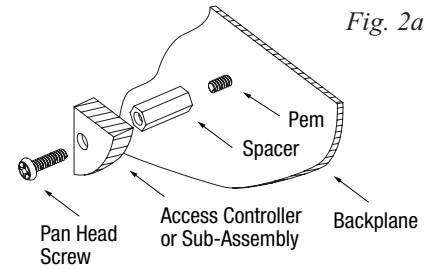


Fig. 2a

TMV2 Backplane Dimensions (H x W x D):
 23.75" x 18.125" x 0.3125" (603.3mm x 460.3mm x 7.9mm)

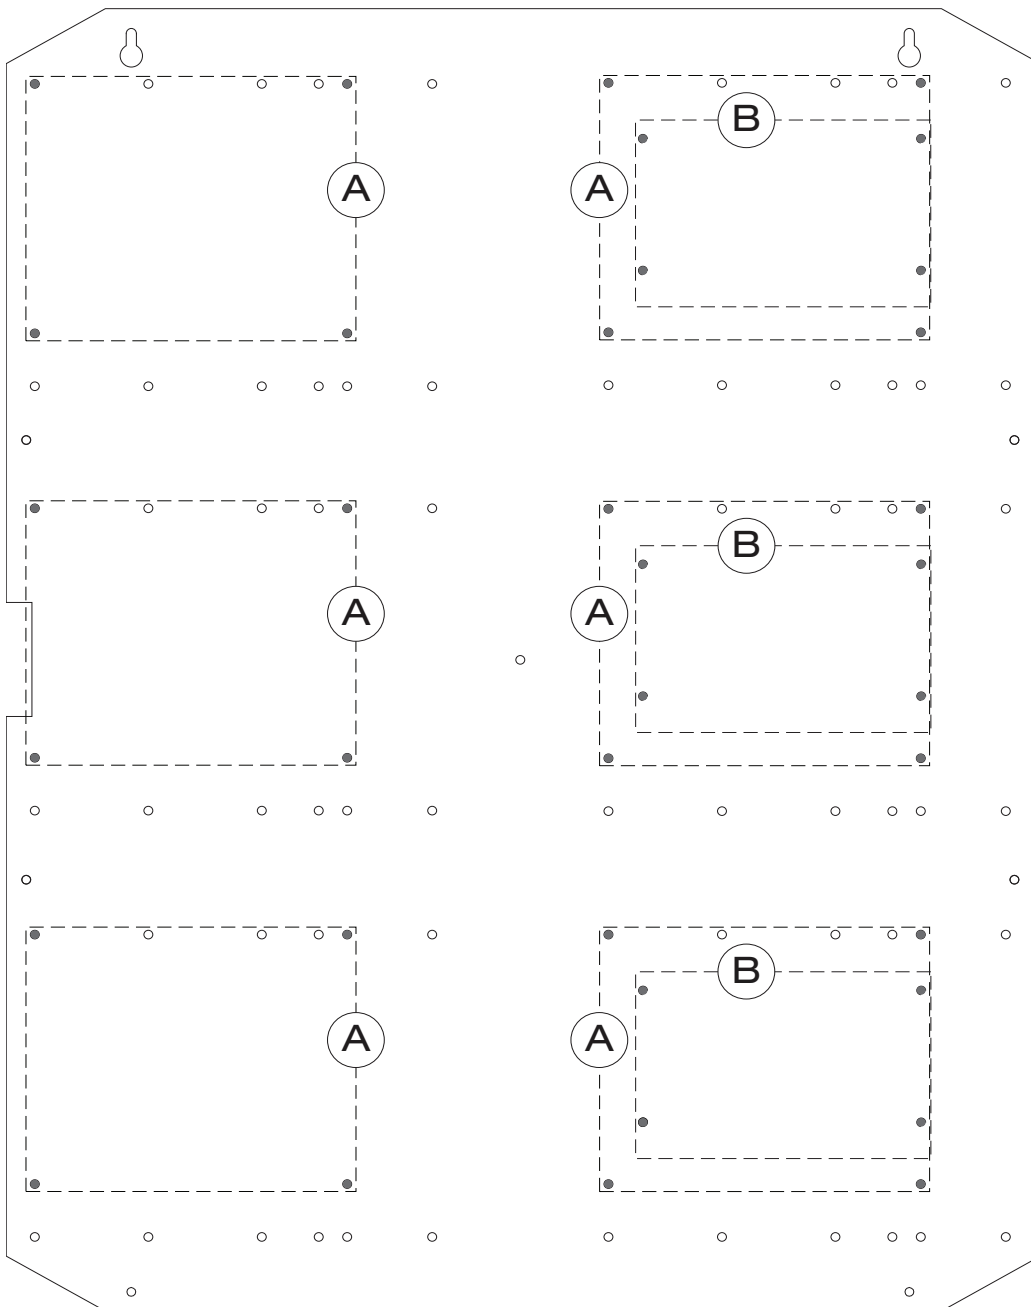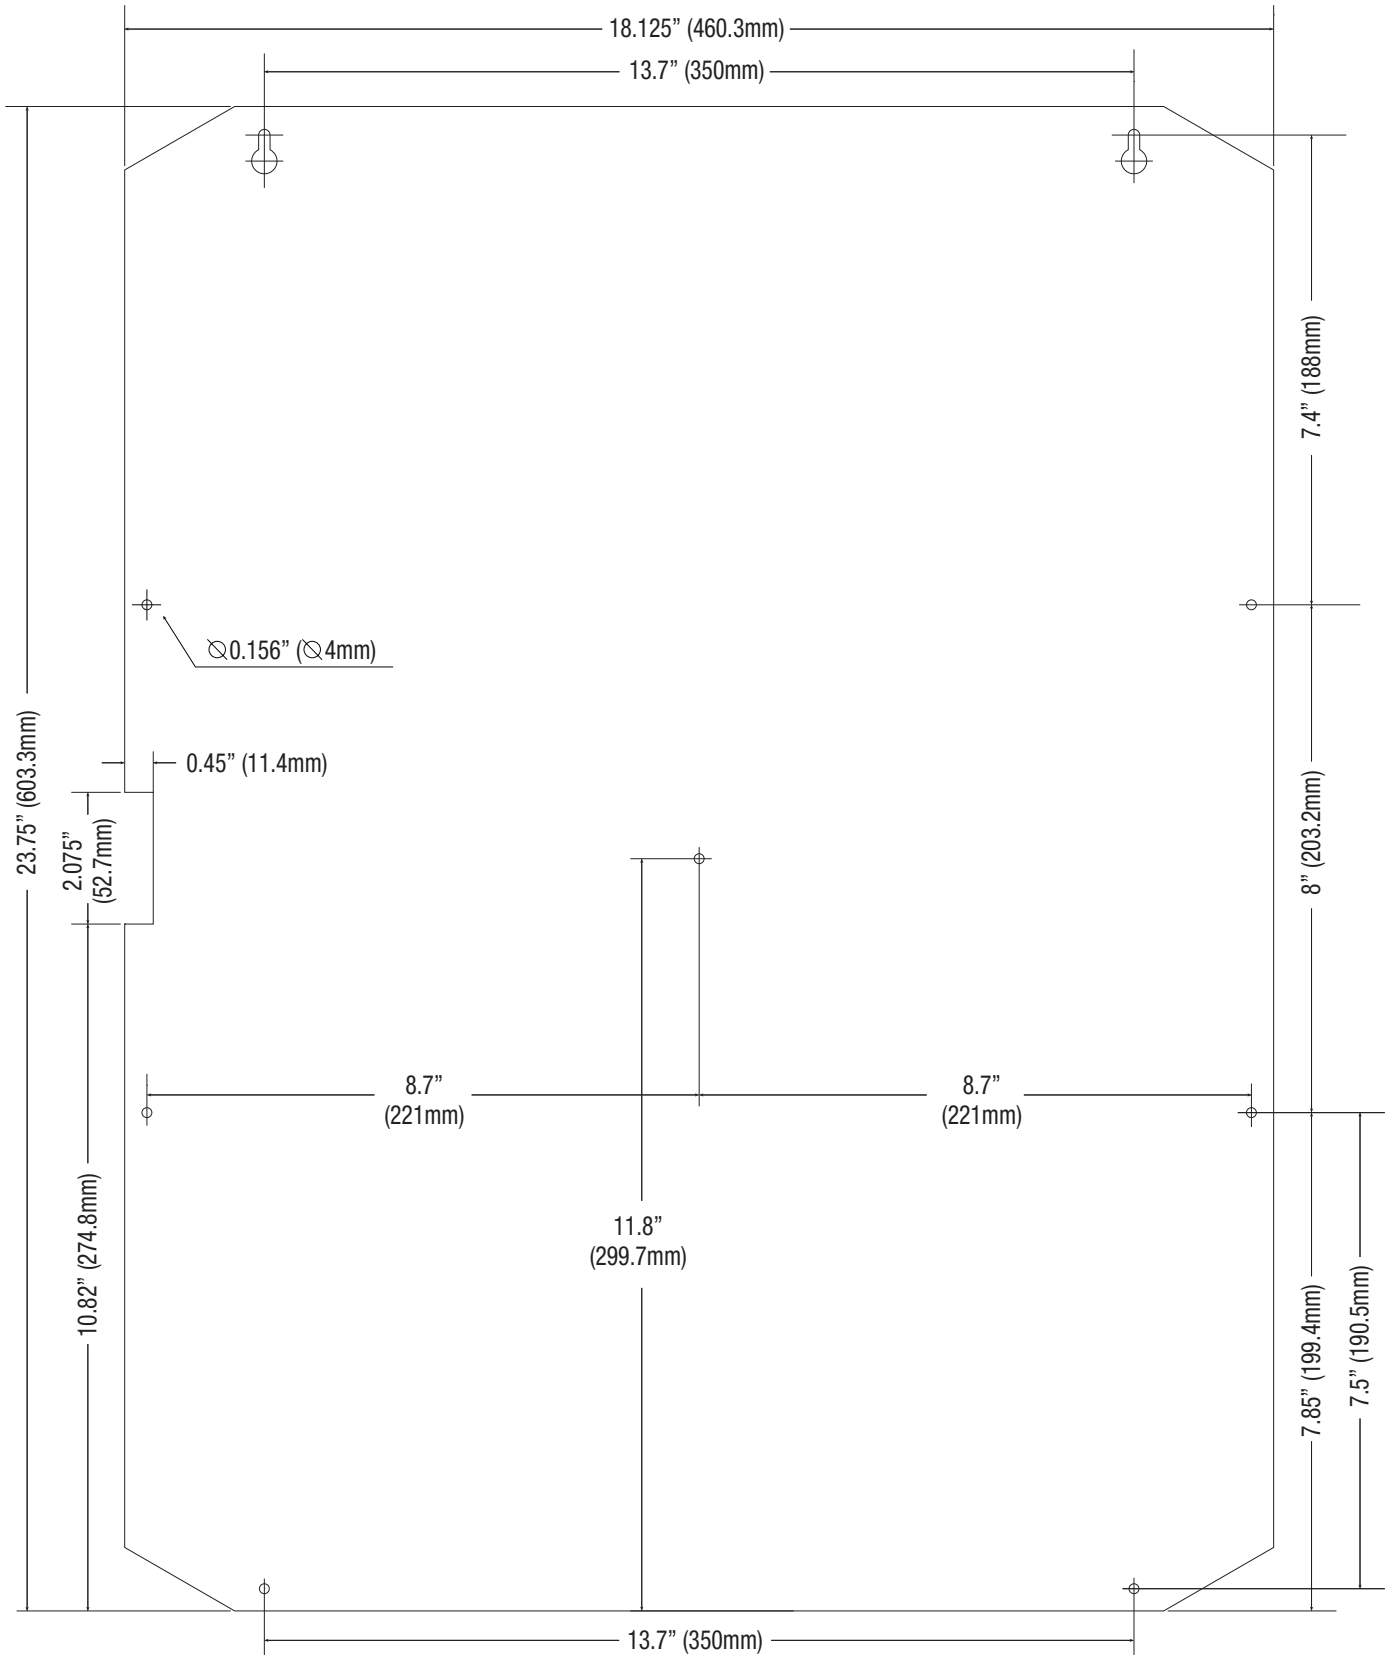

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 web site: www.altronix.com | e-mail: info@altronix.com | Made in U.S.A.
 IITMV2

A16S

