

30 Watt Speaker

ELK-44

The ELK-44 is a universal 30 Watt - 8 Ohm Speaker which may be connected to any siren driver or amplifier. It features a heavy duty voice coil and magnet, allowing it to withstand up to 50 Watts of peak power. The ELK-44's removable "U" shaped mounting bracket makes installation quick and simple. It's small and compact size allows it to be placed in vents, attic eaves and soffits, and other unique locations where large and bulky units will not fit.

Features

- Installer Friendly - Easy To Mount.
- Exterior / Interior use.
- Compact - Less Noticeable.
- Loud - Rivals Sound of Larger Speakers.
- Heavy Duty 1.8 lb Magnet.
- High Fidelity Voice Coil.
- Lifetime Limited Warranty.

Specifications

- Rating: 30 Watts Nominal / 50 Watts Peak.
- Impedance: 8 Ohms.
- Frequency Response: 500 to 7000 Hz.
- Size: 4"H x 4"W x 3.5"D.



Features or Specifications subject to change without notice.



PO Box 100 • Hildebran, NC 28637 • 800-797-9355 • 828-397-4200
Fax 828-397-4415 • www.elkproducts.com • info@elkproducts.com

05/02

ELK
PRODUCTS, INC.

1. Mount the U shaped bracket to the wall.
2. Insert one of the two short bolts into each side of the U shaped bracket with the threads protruding out.
3. Align the heads of the bolts with the slotted openings on each side of the speaker housing.
4. Slide the speaker onto the bolt heads. Install a washer and nut on each bolt and tighten.
5. Connect Black and Red wires to the output of a siren driver or amplifier.

ELK-44 WIRING CONFIGURATIONS

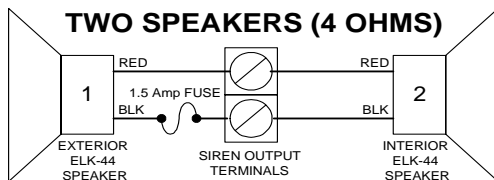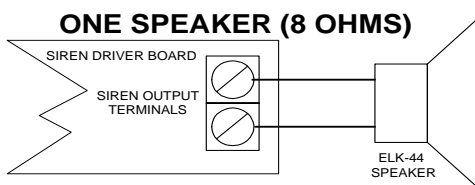

Exposed exterior speakers should be fused with a 1.5 Amp fuse so other speakers will continue to operate if the exposed speaker is shorted.

