




### SF117/4A EMERGENCY PULL CORD SWITCH

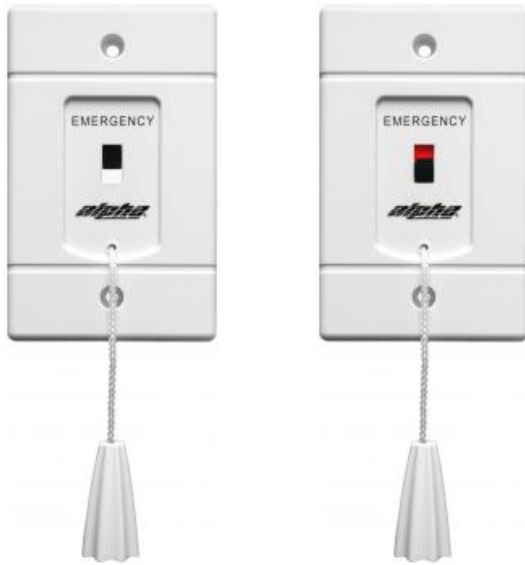

Shown in **STANDBY**  
mode

Shown in  
**ACTIVATED** mode

**NOTE: Our exclusive 'Red Indicator' turns RED when a call is placed, without the need for costly LEDs or additional wiring or additional power.**

#### ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The Emergency Call switch(es) shall be Alpha Communications® model **SF117/4A** or approved equal with pull cord operated switch, mounted on a durable ABS plastic faceplate marked "EMERGENCY". Signaling for assistance shall only require a short pull in any direction on the 6' nylon cord. Canceling the call shall be possible only at the point of origin. Unit shall mount on single-gang electric "gem" box or plaster ring. The **SF117/4A** shall have a RED 'Call-Placed' Flag Indicator which gives positive visual assurance when a call is placed, without the need for any additional power or station wiring. Pull cords without a RED 'call placed' flag indicator shall not be acceptable.

The Emergency Call switch may be used with 'stand-alone' low-voltage emergency systems, or the AlphaEcall™ and/or QwikBUS™ series systems(s), or equivalent.

Contractor shall observe all local and national electrical and building codes.

#### SF117/4A EMERGENCY PULL CORD SWITCH

The Alpha Communications® **SF117/4A** Emergency Pull Switch features a rugged, long-life, positiveacting switch mounted on a durable ABS plastic faceplate. Signaling an emergency requires just a short pull on the 6' long nylon cord, in any direction. The signal cannot be canceled except at the point of origin.

The **SF117/4A** provides four (4) circuits to operate 1-4 signaling devices, such as a remote annunciator lamp, and a corridor dome lamp, as well as signaling circuits to operate additional options such as floor bell(s) and individual apartment electric door openers, as required.

The **SF117/4A** features a rugged, long-life, positiveacting switch mounted on a flame retardant type ABS plastic faceplate marked "EMERGENCY" in Black lettering. In addition, the **SF117/4A** features our 'Exclusive' RED 'Call-Placed' Flag Indicator which gives positive visual assurance when a call is placed, without the need for any additional power or station wiring.

#### SPECIFICATIONS

<b>Dimensions:</b>	<u>Height:</u> 4.50" (114mm) (less cord) <u>Width:</u> 2.75" (70mm) <u>Depth:</u> 1.50" (38mm) (into wall)
<b>Faceplate:</b>	White ABS plastic.
<b>Switch:</b>	<b>SF117/4A</b> - 4PDT (with Flag Indicator) Switch rating: 125V, 2A
<b>Connection:</b>	Pigtail wire leads
<b>Mounting:</b>	Standard single-gang electrical box
<b>Marking:</b>	"EMERGENCY" in Black Letters
<b>Cord Length:</b>	6 foot long (can be shortened in the field), made of durable Nylon

