


# eFlow104NBV

## Power Supply/Charger Board



Altronix eFlow104NBV power supply/charger converts a 220VAC (working range 198VAC - 256VAC), 50/60Hz input into a single 24VDC output. It also offers a suite of features that includes fire alarm disconnect, overvoltage protection, and low power disconnect which prevents deep discharge of stand-by batteries.

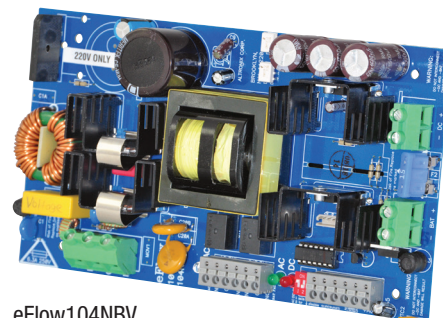

eFlow104NBV

### Specifications

#### Input

Voltage 220VAC (working range 198VAC - 256VAC), 50/60Hz, 2.7A max.

Fusing 6.3A/250V

#### Outputs

Voltage 24VDC

Current 10A continuous max.

Auxiliary 1A (unswitched)

Other Overvoltage protection  
Filtered and regulated

#### Back-up Battery *(not included)*

Type Sealed lead acid or gel type

Fuse Rating 15A/32V

Failover Upon AC loss, instantaneous

#### Fire Alarm Disconnect

Supervised Latching or non-latching

EOL 10K Resistor

#### Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

#### Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply)  
Prevents deep battery discharge

#### Indicators (LED)

Input 220VAC is present

DC Output Powered

Battery Discharged or not connected

#### Agency Listings

CE European Conformity

#### Physical and Environmental

##### Dimensions (L x W x H)

Board: 8.25" x 4.56" x 1.5" (209.5mm x 115.8mm x 38.1mm)

Shipping: 10" x 8" x 4" (254mm x 203.2mm x 101.6mm)

##### Weight (approx.)

Product Weight: 1.1 lb. (0.5 kg)

Shipping Weight: 1.25 lb. (0.57 kg)

##### Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.) 123 BTU/Hr.


Mounting hardware included

#### Lifetime Warranty

**Board Dimensions (L x W x H) and Drawing**

8.25" x 4.56" x 1.5" (209.5mm x 115.8mm x 38.1mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm).

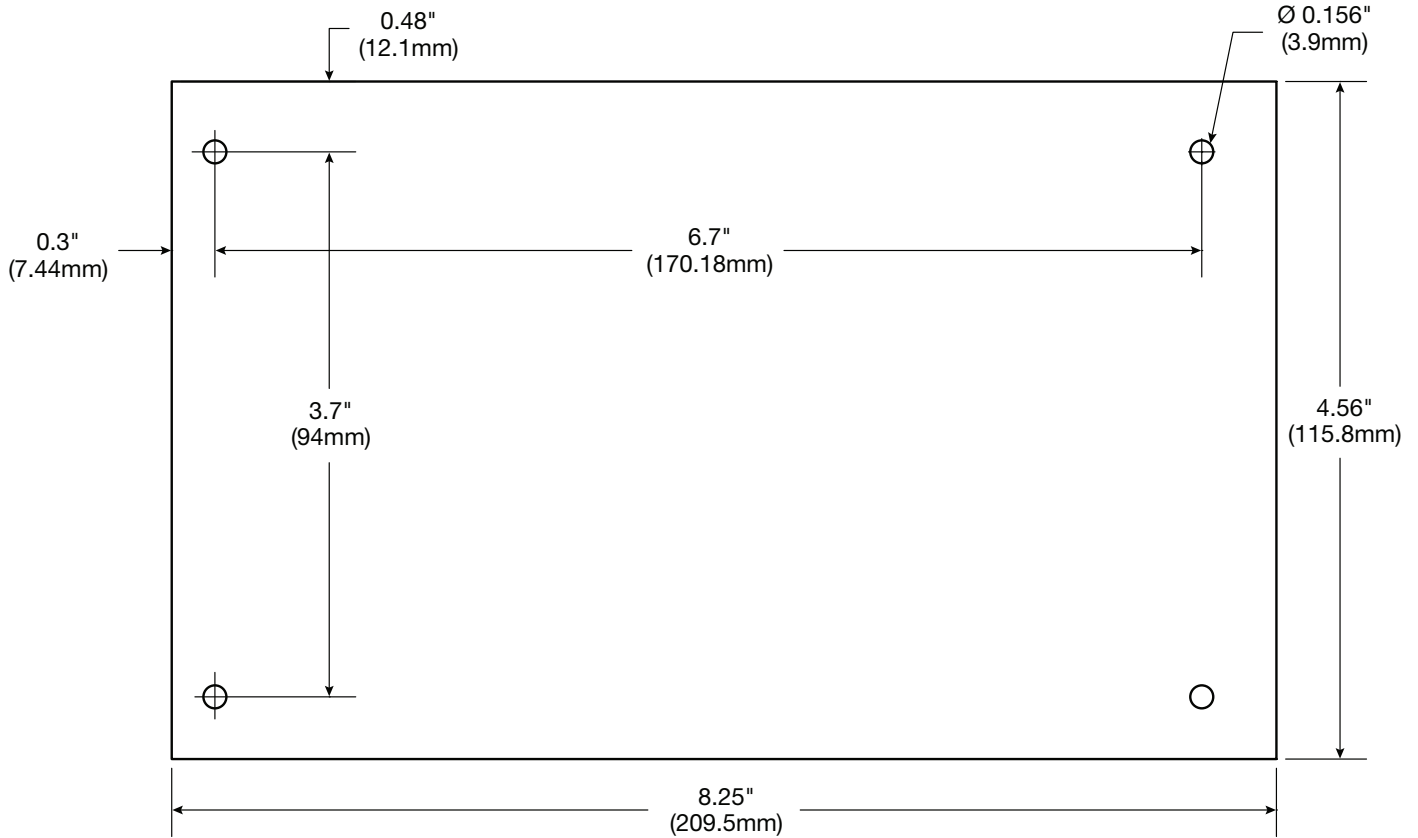

**Accessories (order separately)**



LINQ2

**LINQ2 - Network Supervision**

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



**Lifetime Warranty**