

DS937 Motion detector 360° ceiling 50ft (15m)

Classic Line PIR CM



- ▶ Low profile design
- ▶ 360° up to 14 m (50 ft) coverage
- ▶ Easy installation
- ▶ First to alarm and alarm memory control
- ▶ AC or DC operating voltage

The ceiling mount DS937 PIR Detector provides panoramic coverage (360° x 14 m [50 ft]). Its low profile design provides a recessed-mount look, even when surface mounted. The wiring and programming options can be accessed without having to remove the detector from the ceiling. With a 14 m (50 ft) diameter coverage pattern, it is an ideal ceiling mounting choice for applications that require spot or 360° detection.

Region	Regulatory compliance/quality marks	
USA	UL	ANSR: Intrusion Detection Units [DS937]
	UL	UL 639 - Standard for Intrusion Detection Units

System overview

Functions

Alarm Display

Red LED (on/off selectable) lights on detection for 2.0 ±0.5 sec.


Alarm Memory

Memory Input allows LED to latch if detector alarms during alarm period. First-to-alarm signal allows indication of first detector to alarm when multiple units are used on the same loop.


Certifications and approvals

Region	Regulatory compliance/quality marks	
Australia	RCM	[DS937]
Europe	CE	[DS937]
Russia	GOST	EAC

Installation/configuration notes

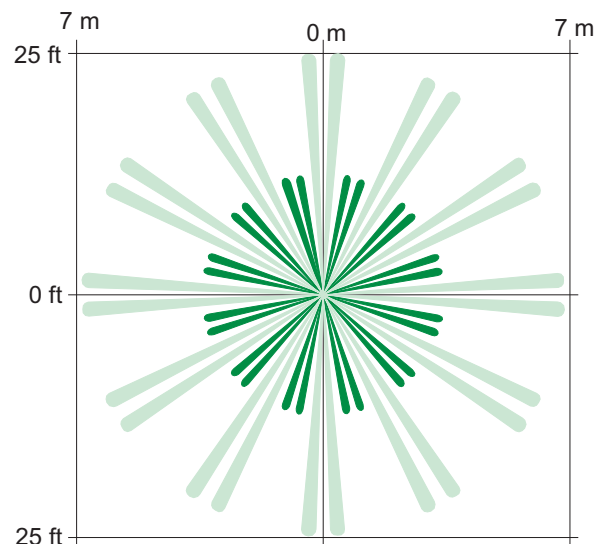

Top View
Standard coverage varies by mounting height. 360° x 14 m (50 ft) diameter when mounted at 3.7 m (12 ft).

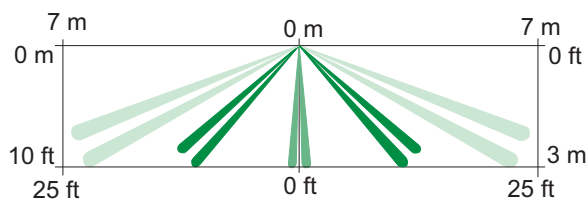**Side View**

Standard coverage varies by mounting height. 360° x 14 m (50 ft) diameter when mounted at 3.7 m (12 ft).

Parts included

Quantity	Component
1	DS937 Panoramic detector

Technical specifications**Detection**

Zones:	A total of 50 detection zones
Speed:	0.2 m/s ~ 5.0 m/s (0.5 ft/s ~ 15 ft/s)
Pulse Count Selectability:	1, 2, 3, or 4 pulses

Enclosure Design

Dimensions:	12.7 cm x 3.8 cm (5 in. x 1.5 in.)
Weight:	176 g (6.2 oz)

Environmental Considerations

Humidity:	0 to 95% humidity non-condensing
Operating Temperature:	-10°C to +49°C (+14°F to +120°F) <i>For UL Listed Applications, 0°C to +49°C (+32°F to +120°F)</i>

Mounting

Height Range:	2.4 m to 3.7 m (8 ft to 12 ft) recommended
---------------	--

Outputs

Relay:	Dry Contact (NC) rated at 30 VDC, 500 mA, 10 W maximum
--------	--

Tamper Switch:	Integral NC, cover-activated
----------------	------------------------------

Power Requirements

Current Draw:	17 mA maximum at 12 VDC
Voltage:	9 VDC to 30 VDC, 7.5 VAC to 24 VAC
Warm-Up Period:	35 ± 3 seconds

Ordering information**DS937 Motion detector 360° ceiling 50ft (15m)**

Provides low profile design, PIR, 360° x 14 m (50 ft) panoramic coverage.

Order number **DS937 | 4.998.126.094**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia