

Data Sheet:

WanderGuard® BLUE Manager

Identifies and displays Controller and Tag data and enables easy Controller configuration

Description

WanderGuard BLUE Manager is a component of STANLEY Healthcare's WanderGuard BLUE Wander Management Solution for monitoring facility doors and preventing at-risk resident wandering.

The WanderGuard BLUE Manager is a tablet-based dedicated mobile application.

The EX5700 Controller can be configured using the WanderGuard BLUE Manager. After establishing Bluetooth® low energy (BLE) communication with the Controller, the Controller's configuration information is displayed in the application. The configuration can be modified and saved back to the Controller.

A Controller's configuration can also be modified by the application and later applied to another Controller. In this way, repetitive data (e.g., user lists, door scheduling) can be ported from one Controller to another without having to re-key the data.

How It Works


The application displays information about Tags and Controllers when the Scan option is activated.

The WanderGuard BLUE Manager receives Tag data from Tags via BLE after they are "excited" by the WanderGuard BLUE Detector. Tag data is displayed in the Tag tab of the Scan Results page.

The WanderGuard BLUE Manager also receives Controller data from the Controller via BLE, which is displayed in the Controller tab.

Tag Data


Tag details are displayed in a table with the following columns: MAC number (of the Tag), status (Dormant/Active), firmware version, battery status (Good/Low), battery type (90 days/3 years), activation date and manufacturing date.

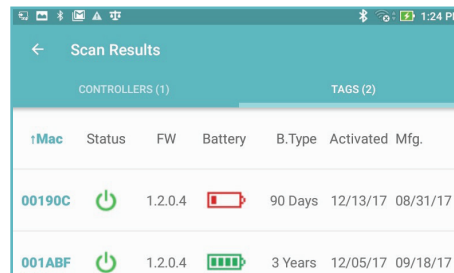

MAC	Status	FW	Battery	B.Type	Activated	Mfg.
00190C	Active	1.2.0.4	Low	90 Days	12/13/17	08/31/17
001ABF	Active	1.2.0.4	Good	3 Years	12/05/17	09/18/17

Controller Data

The Controller information includes firmware version, type and name. Communication with the Controller can be established from the Scan Results page. Once the Controller is connected to the application, the Controller configuration pages can be opened. The pages contain the Controller's configuration parameters: Settings, Clock, Outputs, Users and Schedule.

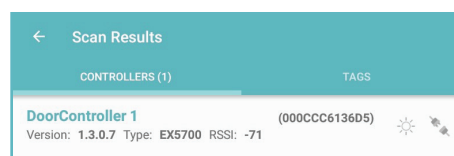


DoorController 1	(000CCC613605)
Version: 1.3.0.7	Type: EX5700
RSSI: -71	

Settings

Sets Controller properties such as: Internal/External LF, Loitering, Door Ajar, Bypass Timeouts, Visitor/Bypass Codes, Bypass termination, Elevator mode, number of connected Indoor Keypads, Tag ID display, Relay Status and Facility Code.

WanderGuard® BLUE

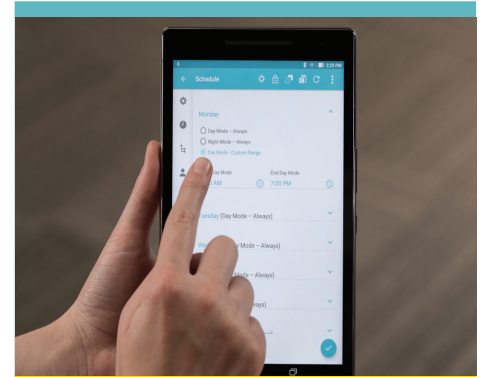

Product Highlights

- **Easily View Tags and Controller Data** – Scan for in-range devices to have their data displayed on the screen.
- **Easy Controller Configuration** – Make changes in the application and upload to the Controller.
- **Copy Configurations to Other Controllers** – The configuration can be copied to other Controllers.
- **Configure the Controller's Internal Clock** – Sync tablet and Controller time.
- **Supports up to 1,000 users** – A user entity includes: First, Middle, Last names, PIN Code, Badge ID and permission settings. A user list can be imported/exported to/from a CSV file.
- **Trigger actions and commands** – Triggers commands to the Controller such as: Start/End Night Mode, Start/End Override, Restart and Restore to default.
- **Configure Controller's settings** – Enable/disable integration with Arial, enable/disable Elevator support, Enable/disable Tag ID and Low Battery display on the Indoor Keypad, number of connected Indoor Keypads, and more.

Schedule

A Day/Night Mode schedule can be set for each day of the week.

Clock

Updates the time, date, time zone and Daylight Savings Time (DST). Clock settings are used by the Controller to enforce the Day/Night Mode schedule.




Programmable Outputs

The Controller has two programmable outputs that can be programmed to be activated when the Controller enters a specific status or mode. The outputs are deactivated when the Controller is no longer in that status or mode.

Users

This page contains a list of users who have the access code to the door that the Controller protects. Out-of-the-box, the Controller has no configured users. Users can be added, deleted and modified.

The Controller supports up to 1,000 users in the Users List.

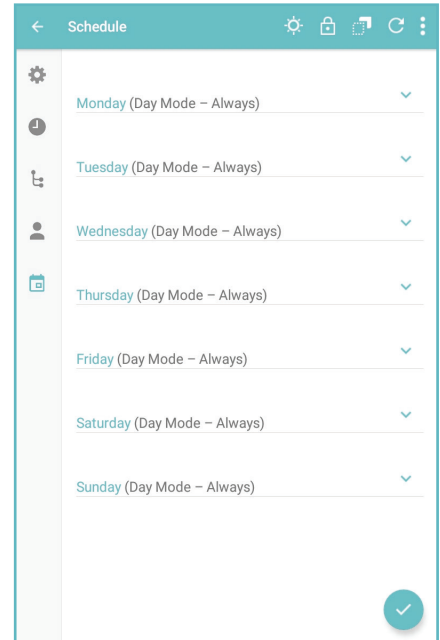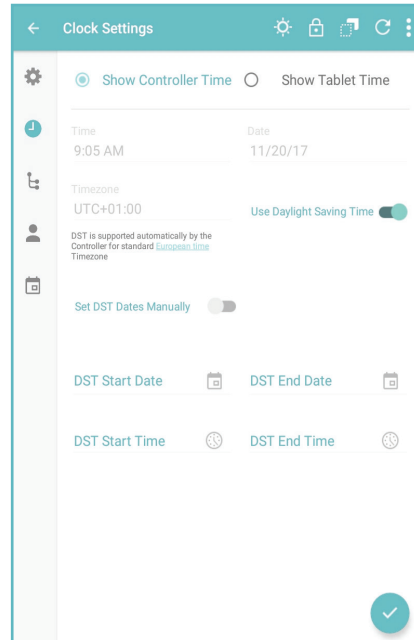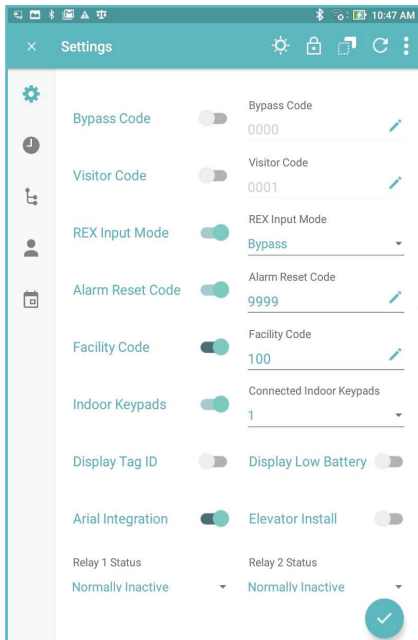

Specifications	
Part Number	WanderGuard BLUE Manager SKU: WGB-MGR-1000 (includes: Tablet with WanderGuard BLUE Manager (the application), Tablet charger and cover WanderGuard BLUE Tablet Cover SKU: WGB-COVER-1000
Pre-installed software by STANLEY Healthcare	WanderGuard BLUE Manager Google Sheets TeamViewer (all applications that come with off-the-shelf Asus tablet are included)
Tablet	Asus ZenPad 8.0 Tablet (Z380M) 8 inch screen 2 GB RAM, 16 GB storage

By Your Side™ Lifetime Customer Care

At STANLEY Healthcare, we measure our success by yours. The By Your Side Customer Care commitment combines a range of services to ensure that every customer achieves success and realizes the full value of their investment.