


EKB700 Keyboard

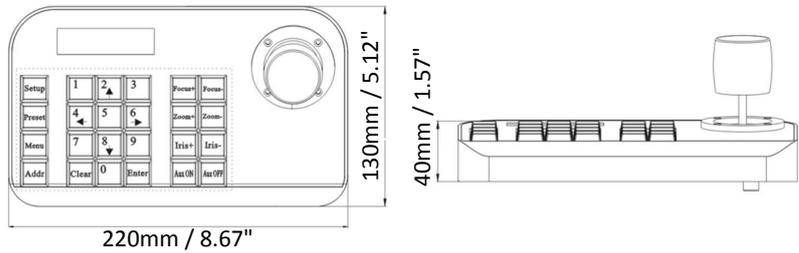

Features

- Address can be set from 0~255
- Up to 128 devices can be connected in parallel
- Lightning protection design of all input and output communication ports
- High anti-jamming ability
- Up to 1.2km transmission distance
- Full functionalities for controlling the speed dome cameras
- Built-in multiple protocols
- Supports OSD with multi-language
- Supports key sound on/off function

Specification

Model No.	EKB700 Keyboard		
Power Supply	12VDC + 10% / 500mA	Communication between Camera and Keyboard	One point to multi-points Half-duplex
Operating Temperature	-20°C ~ +55°C / -4°F ~ 131°F	Joystick	Vector joystick
Operating Humidity	≤90% non-condensing	Display	LCD
Communication	RS-485	Communication Distance	1.2km
Interface	4-PIN terminals (RS-485)	Control Camera Quantity	128
Baud Rate	1200bps, 2400bps, 4800bps, 9600bps, 19200bps	OSD Menu Language	English
Communication Protocol	PELCO-D, PELCO-P, SAMSUNG, YAAN, SAE	Dimensions (W x D x H)	220 x 130 x 10mm / 8.67" x 5.12" x 1.57"

*All images presented in this document are for example only. Product models may vary in different countries. Please visit EverFocus regional Websites for detailed ordering information.

*Information contained in this document is subject to change without notice.

Find Out More At:

EverFocus Taiwan HQ:
 TEL: +886 2 2662 2338
 www.everfocus.com.tw
 marketing@everfocus.com.tw

EverFocus USA - California:
 TEL: +1 626 844 8888
 www.everfocus.com
 sales@everfocus.com

International Branch Offices:
 China, Japan