

EZA2580

5-Megapixel True Day/Night
Outdoor IR Bullet Camera


eZ.HD



Features

- 5MP Sony STARVIS CMOS sensor, delivering amazing high sensitivity
- Varifocal 2.8-12mm with ICR to capture the desired field of view
- Extended IR range of up to 40m / 131ft. with 4 LEDs (depends on scene IR reflectivity)
- T-WDR to improve the visibility under high contrast scene
- The flexible angle viewing with its 3-Axis rotation design allows wall or ceiling mounting
- IP66-rated with metal housing
- Supports UTC function: Control camera OSD settings directly from DVR end

Dimensions

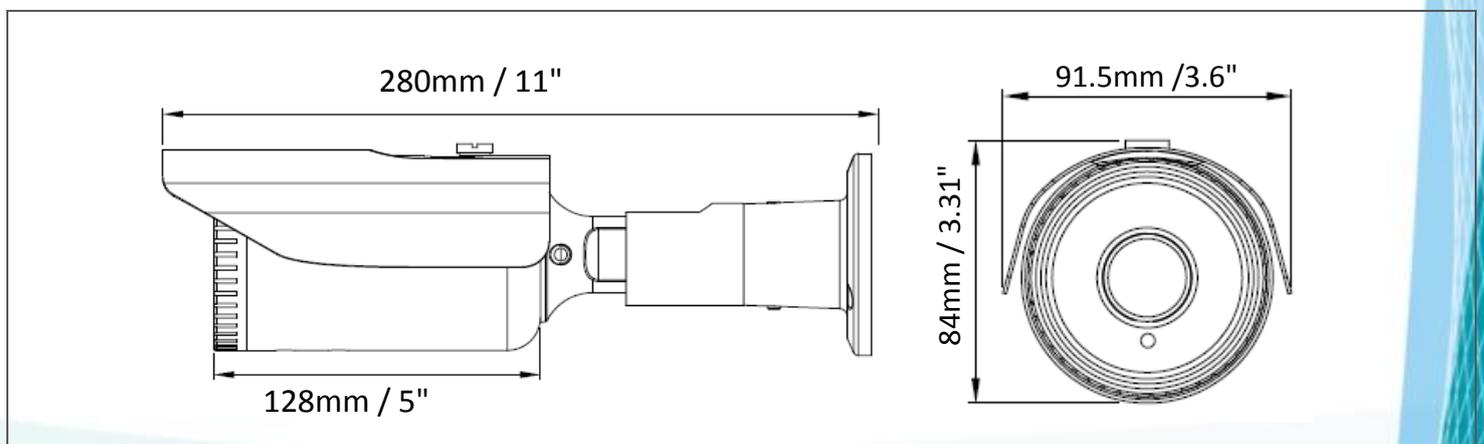

Optional Accessories

BA-E320



Color: White
 Size (Φ x H): 138 x 54mm / 5.43" x 2.16"
 Weight: 700g / 1.87
 Material: Metal

Specifications

Model No.	EZA2580		
Pickup Device	5MP Sony STARVIS CMOS sensor	Video Format	AHD / TVI / CVI / CVBS
System Format	NTSC / PAL (switchable via OSD)	S/N Ratio	≥50dB
Effective Pixels	2592 (H) x 1944 (V)	OSD Languages	ENG / CHN / CHN(S) / JPN / KOR / POR / ESP
Scanning System	Progressive Scan	DNR	Off / Middle / High / Low
Sensitivity	0 Lux with IR On	T-WDR	96dB
Electronic Shutter	1/30s~1/30,000s	Sens-up	Off / x2 / x4 / x8 / x16 / x32
Gamma Correction	0.45, 0.55, 0.65, 0.75	Mirror / Flip	Off / On
Lens Type	Varifocal 2.8-12mm with ICR, F1.4	Motion Detection	Supported
FOV (D x H x V)	138~40° x 103~33° x 74~25°	Privacy Mask	Supported
BLC	Off / BLC / HLC / WDR	Environmental	IP66 Weather Resistant
AGC	Auto	Power Source	12VDC, 700mA
White Balance	Supported	Max. Power Consumption	8.4W
Sync. Mode	Internal	Operating	-10°C ~ 50°C / 14°F ~ 122°F
Day / Night	Supported	Humidity	Less than 95%
UTC Function	Supported	Dimensions (W x H x D)	91.5 x 84 x 280mm / 3.6" x 3.3" x 11"
IR LEDs	4 Units	Weight	1400g / 3.09lb
IR Distance	Up to 40m / 131ft. (Depends on scene IR reflectivity)	Certificates	CE, FCC, RoHS