

T1M1LCK2 (Pre-wired Kit)

Access and Power Integration Solution for Mercury



Altronix T1M1LCK2 is a 4-door access and power integration kit which includes Altronix power and sub-assemblies along with factory installed wire management and wire assemblies that are pre-configured with terminal blocks for Mercury* hardware. This unit provides ample power and dual voltage outputs to support Mercury platform controllers and locking devices. The T1M1LCK2 accommodates one (1) Intelligent Controller and one (1) Dual Reader Interface Modules. Trove Plus simplifies field installations and provides reliable, robust critical power and control for the most demanding applications.



T1M1LCK2 - includes AL400ULXB2, PDS8, VR6, ACM4, wire harnesses and wire magnets

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic i-PRO MonitorCast, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt



Mercury modules are not included

Key Features

- Accommodates the following Mercury controllers:
 - 1 - LP2500 and 1 - MR52
- Convenient knockout configuration:
 - One (1) knockout - 1-1/2" Conduit
 - Nine (9) double knockouts - 3/4" Conduit and 1" Conduit
- Unit includes:
 - Removable backplane
 - Wire management
 - Custom wire assemblies for power distribution with terminal blocks for controller connections
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- Enclosure accommodates up to two (2) 12VDC/7AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

Specifications

Power Supply (AL400ULXB2):

Input

Voltage	115VAC, 60Hz, 3.5A max
Fusing	5A / 250V

Output

Voltage	12VDC or 24VDC selectable
Current	4A @ 12VDC or 3A @ 24VDC continuous max
Other	Overvoltage protection. Filtered and regulated

Battery Backup

Capacity	7AH/12VDC (Up to 2 within enclosure) 40AH/6 AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Indicators (LED)

Input	115VAC is present
DC Output	Powered
Battery	Discharged or not connected

Dual Input Power Distribution Module (PDS8)

Input

Voltage	12VDC from VR6 and 24VDC from AL400ULXB2
Input Fuse	10A/32V

Outputs

Voltage	12VDC and/or 24VDC.
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2	
Individual outputs may be set to OFF position for servicing	

Outputs Ratings

Fuses	3A/32V
-------	--------

Indicators (LED)

DC Output	Eight (8) individual output LEDs
Green:	12VDC
Red:	24VDC

Voltage Regulator (VR6):

Input

Voltage	24VDC from AL400ULXB2
---------	-----------------------

Output

Voltage	12VDC
Current	6A continuous
Other	Surge suppression

Indicators (LED)

Input	24VDC is present
Output	Powered

Access Power Controller (ACM4):

Input

Voltage	24VDC from AL400ULXB2
Input Fuse	10A/32V

Outputs

Voltage	24VDC
Four (4) independently controlled 2.5A outputs:	
a) Four (4) Fail-Safe and/or Fail-Secure power outputs.	
b) Four (4) dry form "C" 5A rated relay outputs.	
c) Any combination of the above.	
Four (4) auxiliary power outputs (unswitched)	

Outputs Ratings

Fuses	3A/32VDC
-------	----------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized)
Green LED	FACP disconnect is triggered

T1M1LCK2 Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies. Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity.
----	----------------------

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	18" x 14.5" x 4.62" (457.2mm x 368.3mm x 118.0mm)
Shipping:	21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)


Product	18.0 lb. (8.17 kg)
Shipping	22.0 lb. (9.98 kg)

Temperature

Operating	0°C to 49°C (32°F to 120°F)
Storage	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity	85% +/- 5%
-------------------	------------

BTU/Hr (approx.):	90 BTU/Hr.
-------------------	------------

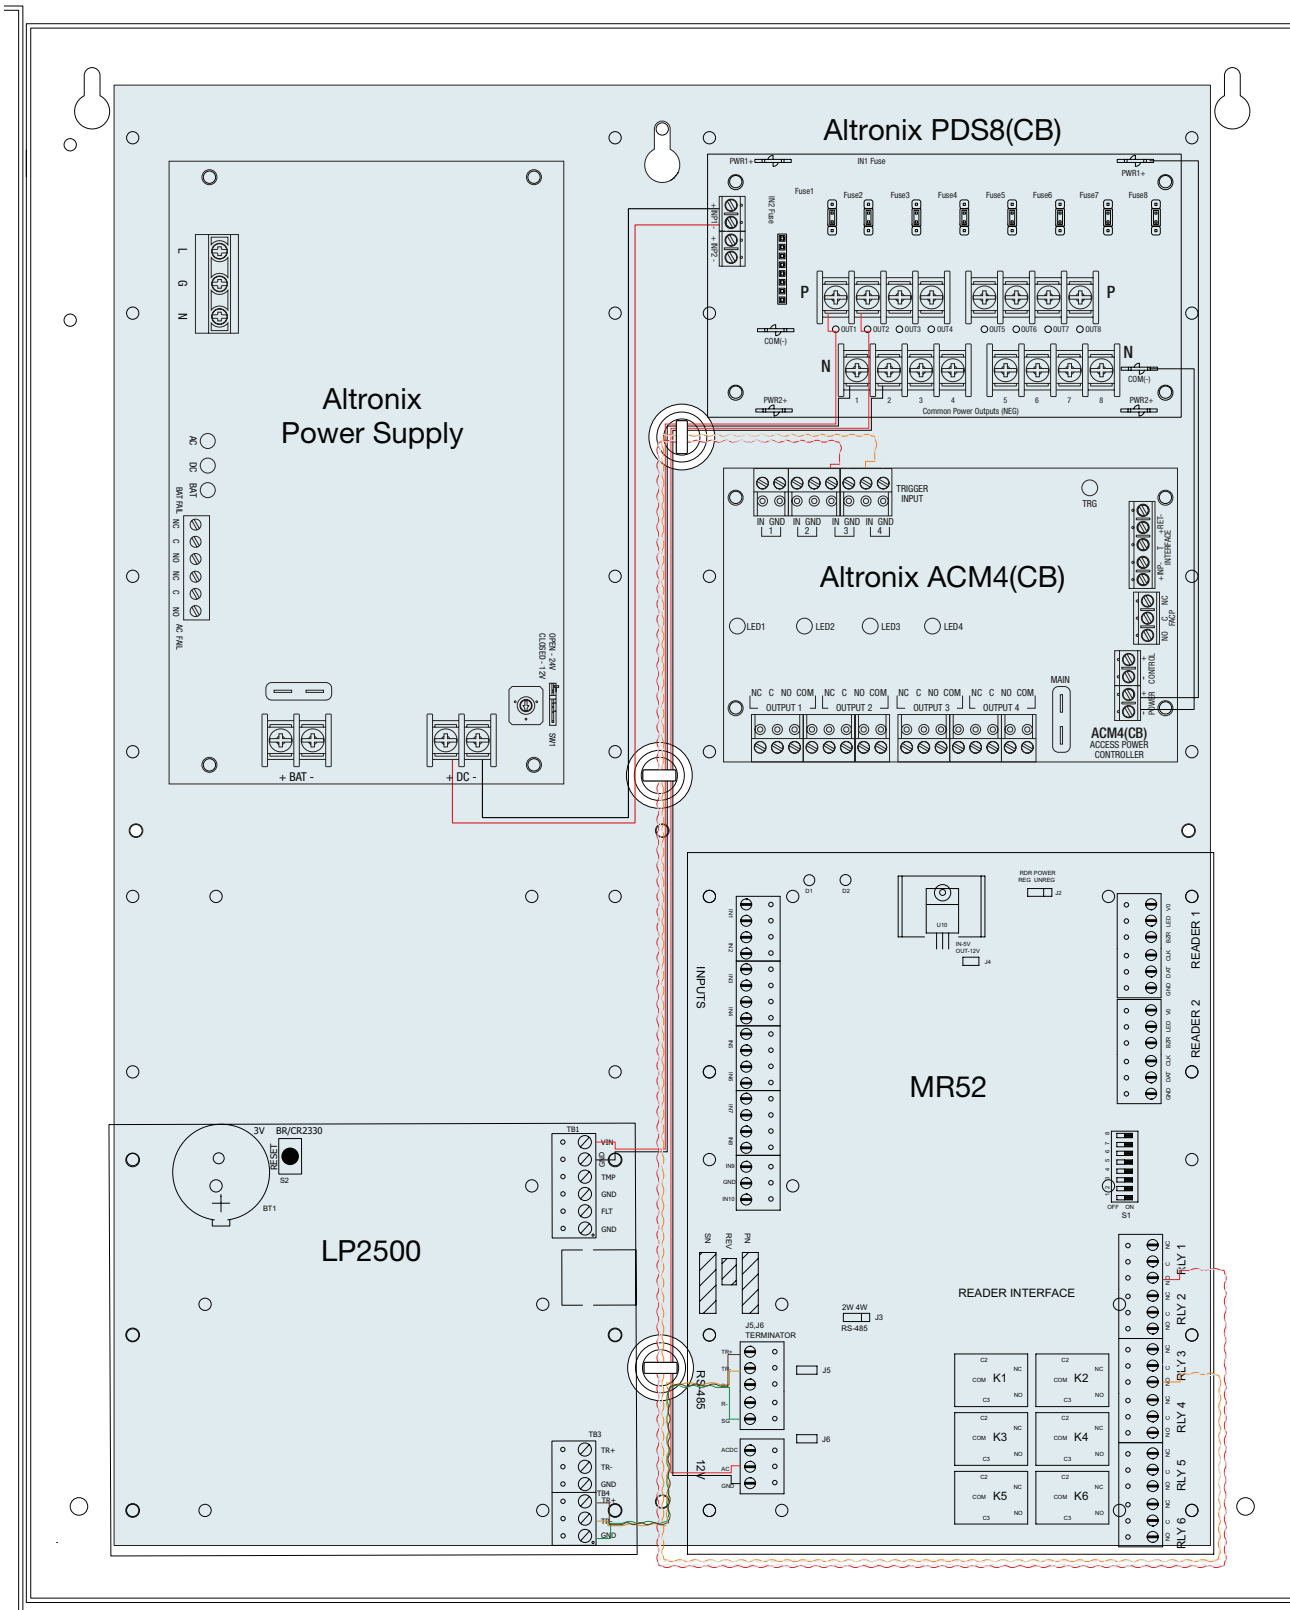

Dimensions and Drawing

Dimensions (H x W x D approximate)
 18.0" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

