

Access & Power Integration

Altronix/Honeywell Wired Networked Kits

Models Include:

T3HW75XK1Q2

16 Door Kit with Fused Outputs
Accommodates one (1) Intelligent Controller and seven (7) Dual Reader Modules.

T3HW75XK3Q2

16 Door Kit with Fused Outputs
Accommodates up to eight (8) Dual Reader Modules.

Each fully assembled kit includes:

- Trove3 enclosure with THW3 Altronix/Honeywell backplane and THWD2 Honeywell door backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) eFlow102NB - Power Supply/Charger
- One (1) LINQ2 - Network Communication Module
- Two (2) ACMS8 - Dual Input/Output Fuse Protected Access Power Controllers
- Two (2) PDS8 - Dual Input/Output Fuse Protected Power Distribution Modules
- One (1) Rocker Switch Bracket with Two (2) Rocker Switches (Not evaluated by UL)
- Wire harnesses and finger duct

T3HW75XK1DQ2

16 Door Kit with PTC Outputs
Accommodates one (1) Intelligent Controller and seven (7) Dual Reader Modules.

T3HW75XK3DQ2

16 Door Kit with PTC Outputs
Accommodates up to eight (8) Dual Reader Modules.

Each fully assembled kit includes:

- Trove3 enclosure with THW3 Altronix/Honeywell backplane and THWD2 Honeywell door backplane
- One (1) eFlow104NB - Power Supply/Charger
- One (1) eFlow102NB - Power Supply/Charger
- One (1) LINQ2 - Network Communication Module
- Two (2) ACMS8CB - Dual Input/Output PTC Protected Access Power Controllers
- Two (2) PDS8CB - Dual Input/Output PTC Protected Power Distribution Modules
- One (1) Rocker Switch Bracket with Two (2) Rocker Switches (Not evaluated by UL)
- Wire harnesses and finger duct

Please refer to the included corresponding Sub-Assembly Installation Guides for further information.

Installation Guide



All registered trademarks are property of their respective owners.

Rev. T3HW75XKQ2_020524

Installing Company: _____ Service Rep. Name: _____

Address: _____ Phone #: _____



More than just power.™

Overview:

Altronix Trove Plus networked kits are pre-wired, pre-assembled and consist of Trove3HW3 enclosure/backplane with factory installed Altronix power supply/chargers and sub-assemblies, wire harnesses and finger duct.

Configuration Chart:

Altronix Model Number	120VAC 60Hz Input Current (A)	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	Nominal DC Output Voltage				Maximum Supply Current for Main and Aux. Outputs on Power Supply board and ACMS8(CB) Access Power Controller's outputs	Fail-Safe/Fail-Secure or Dry Form "C" Outputs	Current Per ACMS8(CB) and PDS8(CB) Output (A)	ACMS8(CB) Board Input Fuse (PTC) Rating	ACMS8(CB) Board Output Fuse (PTC) Rating	PDS8(CB) Board Input Fuse (PTC) Rating	PDS8(CB) Board Output Fuse (PTC) Rating
				Power Supply 1		Power Supply 2								
				[DC]	[Aux]	[DC]	[Aux]							
T3HW75XK1Q2	8	6.3A/ 250V	15A/ 32V	Output Range (VDC) 20.17-26.4	Output Range (VDC) 20.28-26.4	Output Range (VDC) 9.7-13.2	Output Range (VDC) 10.03-13.2	eFlow104NB: 24VDC @ 9.4A eFlow102NB: 12VDC @ 9.7A	16	2.5	15A/ 32V	3A/ 32V	10A/ 32V	3A/ 32V
T3HW75XK3Q2														
T3HW75XK1DQ2														
T3HW75XK3DQ2														

Hardware and Accessories:

- Two (2) tamper switches (Altronix Model TS112 or equivalent).
- Cam lock.
- Battery leads.

Mechanical:


- 16 Gauge enclosure with ample knockouts for convenient access.
- Enclosure Dimensions (H x W x D): 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm).

Installation Instructions:


Wiring methods shall be in accordance with the National Electrical Code/NFPA 70/ANSI, and with all local codes and authorities having jurisdiction. Product is intended for indoor use only.

1. Remove backplane from enclosure. Do not discard hardware.
2. Mark and predrill holes in the wall to line up with the top three keyholes in the enclosure. Install three upper fasteners and screws in the wall with the screw heads protruding. Place the enclosure's upper keyholes over the three upper screws, level and secure. Mark the position of the lower three holes. Remove the enclosure. Drill the lower holes and install the three fasteners. Place the enclosure's upper keyholes over the three upper screws. Install the three lower screws and make sure to tighten all screws.
3. Mount included UL Listed tamper switches (Altronix Model TS112 or equivalent) in desired location, opposite hinge. Slide the tamper switch bracket onto the edge of the enclosure approximately 2" from the right side (*Fig. 1, pg. 2*). Connect tamper switch wiring to the Access Control Panel input or the appropriate UL Listed reporting device. To activate alarm signal open the door of the enclosure.
4. Refer to the *eFlow Power Supply/Charger Installation Guide* for eFlow104NB and eFlow102NB and corresponding *Sub-Assembly Installation Guides* for LINQ2, PDS8(CB) and ACMS8(CB) for further installation instructions.
5. Position Honeywell access controller modules over corresponding spacers and depress onto snap on spacers (*Fig. 2-4, pg. 3-5*).
6. Connect wire harnesses to Honeywell access controller modules (*Fig. 2-4, pg. 3-5*).
7. Mount backplane to enclosure with hardware.

Fig. 1

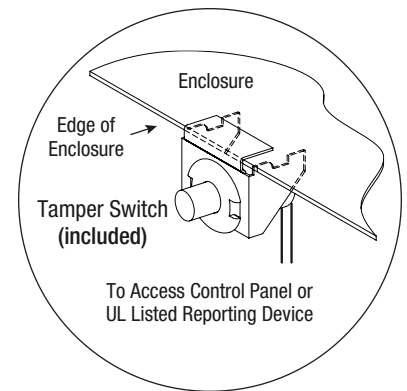

Hardware:




T3HW75XK1(D)Q2 Configuration:

1. Position access controller module over corresponding spacers and depress onto snap on spacers (Fig. 2, pg. 3).
2. Mount backplane to enclosure with hardware.

Access Controller Position Chart for the Following Models:

Honeywell Access Controller	Pem Mounting
PW7K11C / PRO421C	(A)
PW7K1R2 / PRO42R2	(B) (C) (D)

Fig. 2

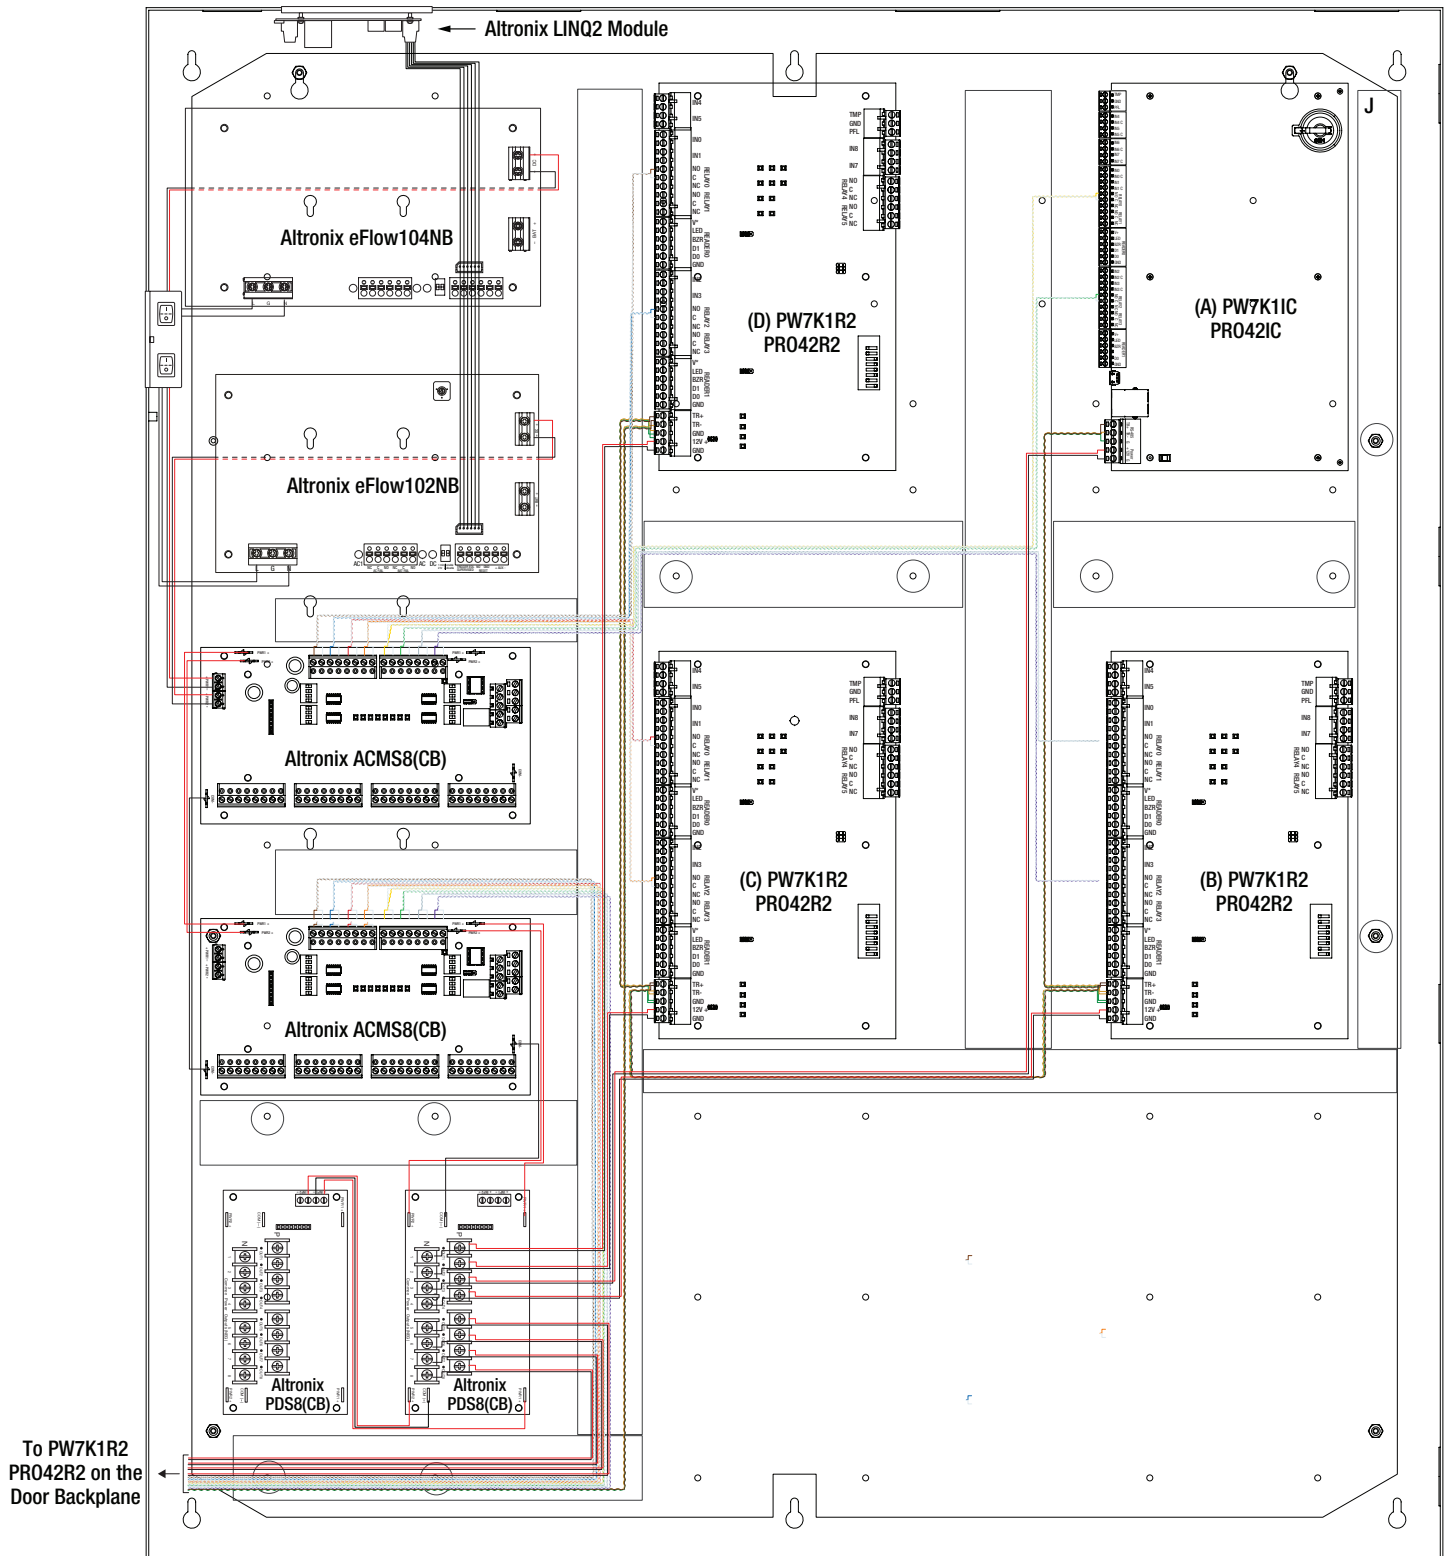


T3HW75XK3(D)Q2 Configuration:

1. Position access controller module over corresponding spacers and depress onto snap on spacers (Fig. 3, pg. 4).
2. Mount backplane to enclosure with hardware.

Access Controller Position Chart for the Following Models:

Honeywell Access Controller	Pem Mounting
PW7K1R2 / PRO42R2	A B C D

Fig. 3

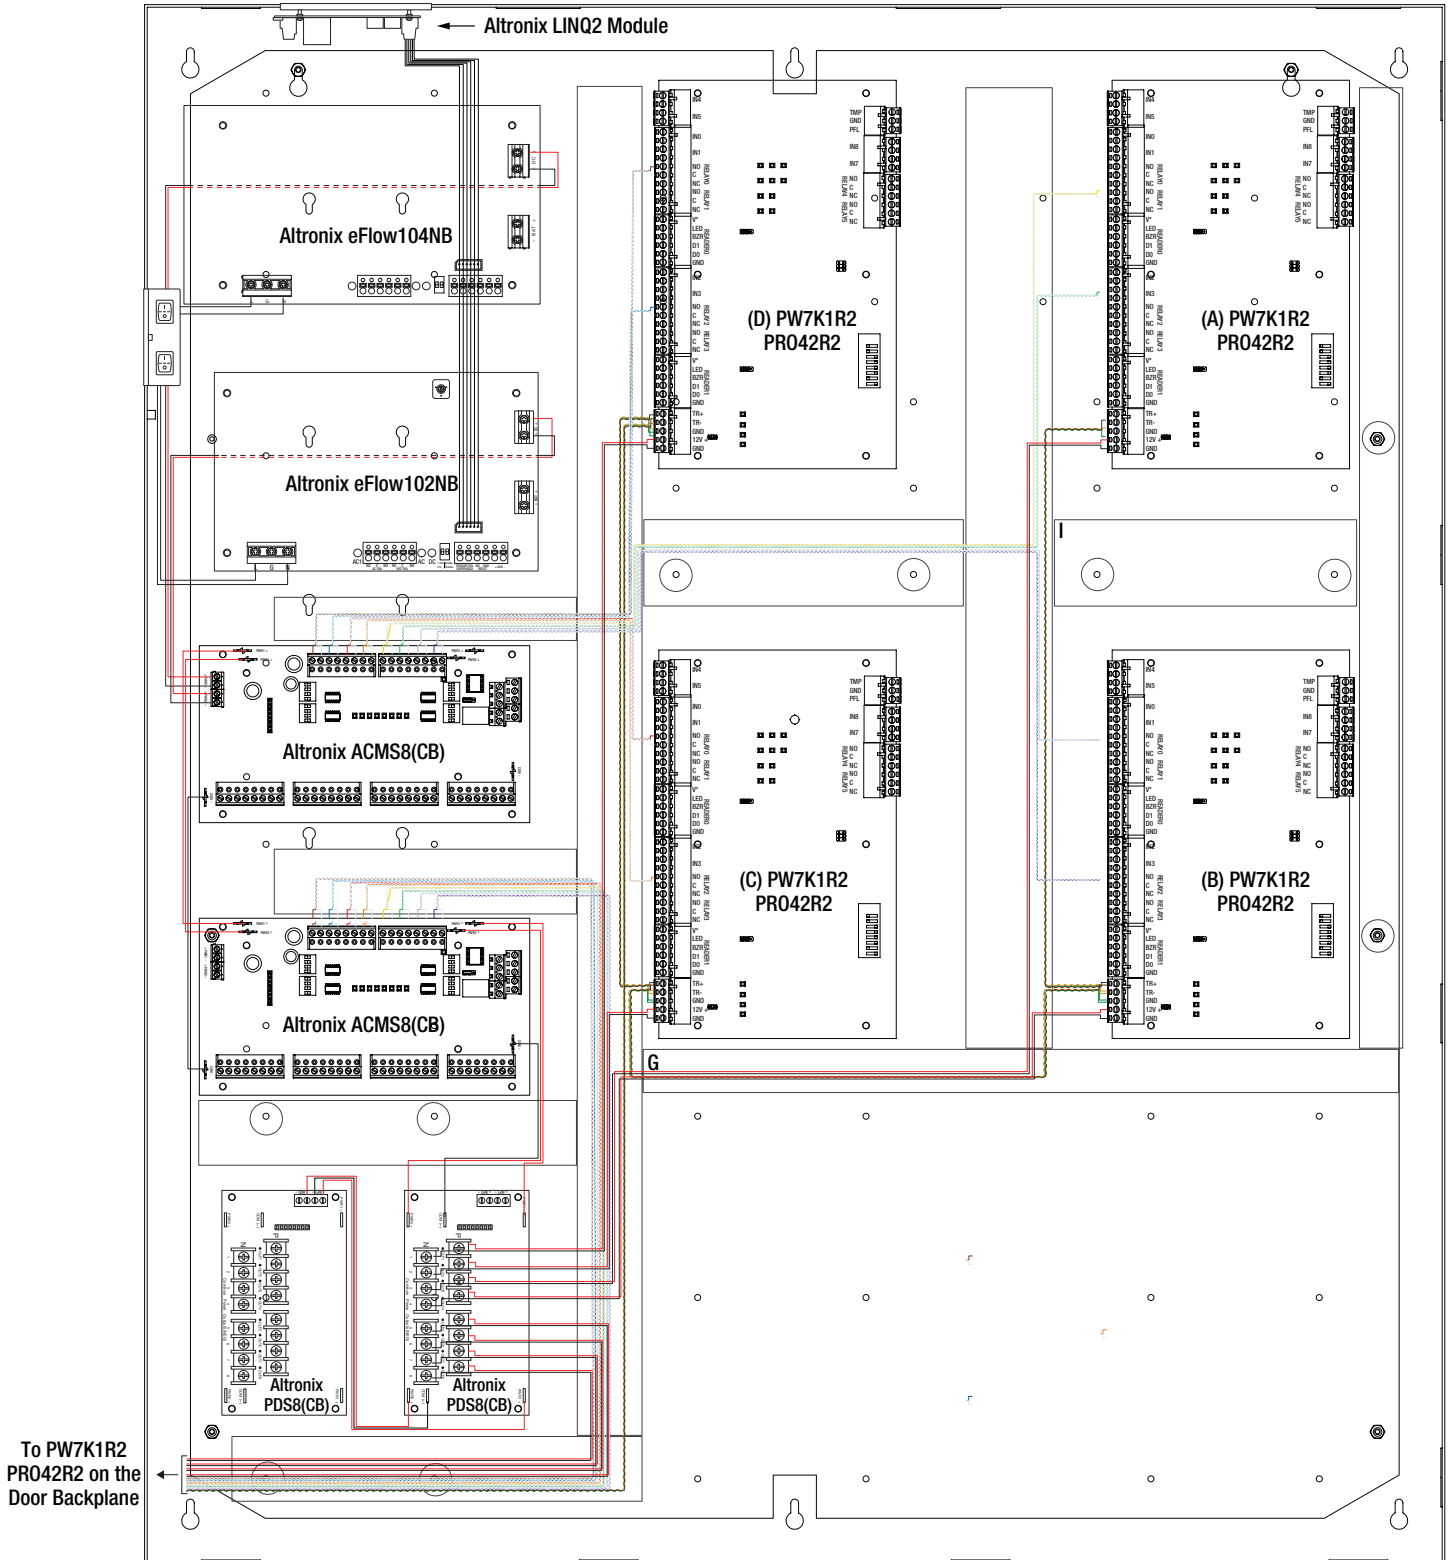


THWD2 (T3HW75XK1(D)Q2 and T3HW75XK3(D)Q2) Configuration:

1. Position access controller module over corresponding spacers and depress onto snap on spacers (Fig. 4, pg. 5).
2. Mount backplane to enclosure with hardware.

Access Controller Position Chart for the Following Models:

Honeywell Access Controller	Pem Mounting
PW7K1R2 / PRO42R2	(E) (F) (G) (H)


Fig. 4

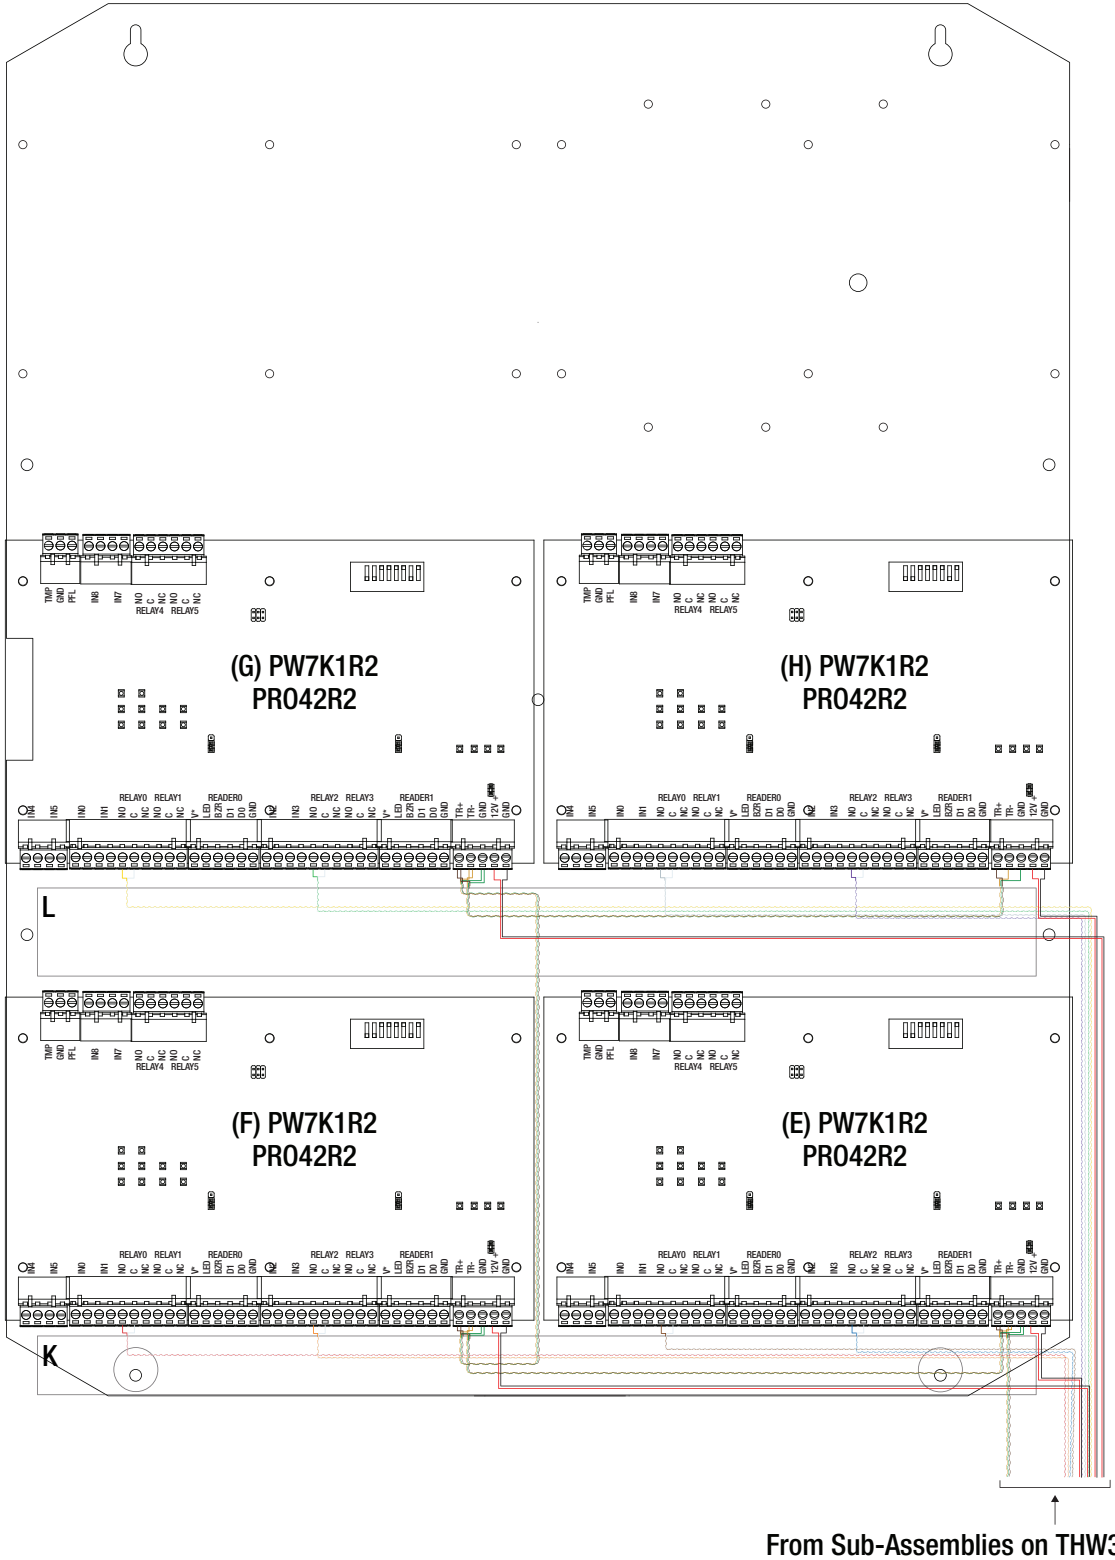

Notes:

Notes:

Trove3 Enclosure Dimensions (H x W x D approximate): 36.12" x 30.125" x 7.06" (917.5mm x 768.1mm x 179.3mm)

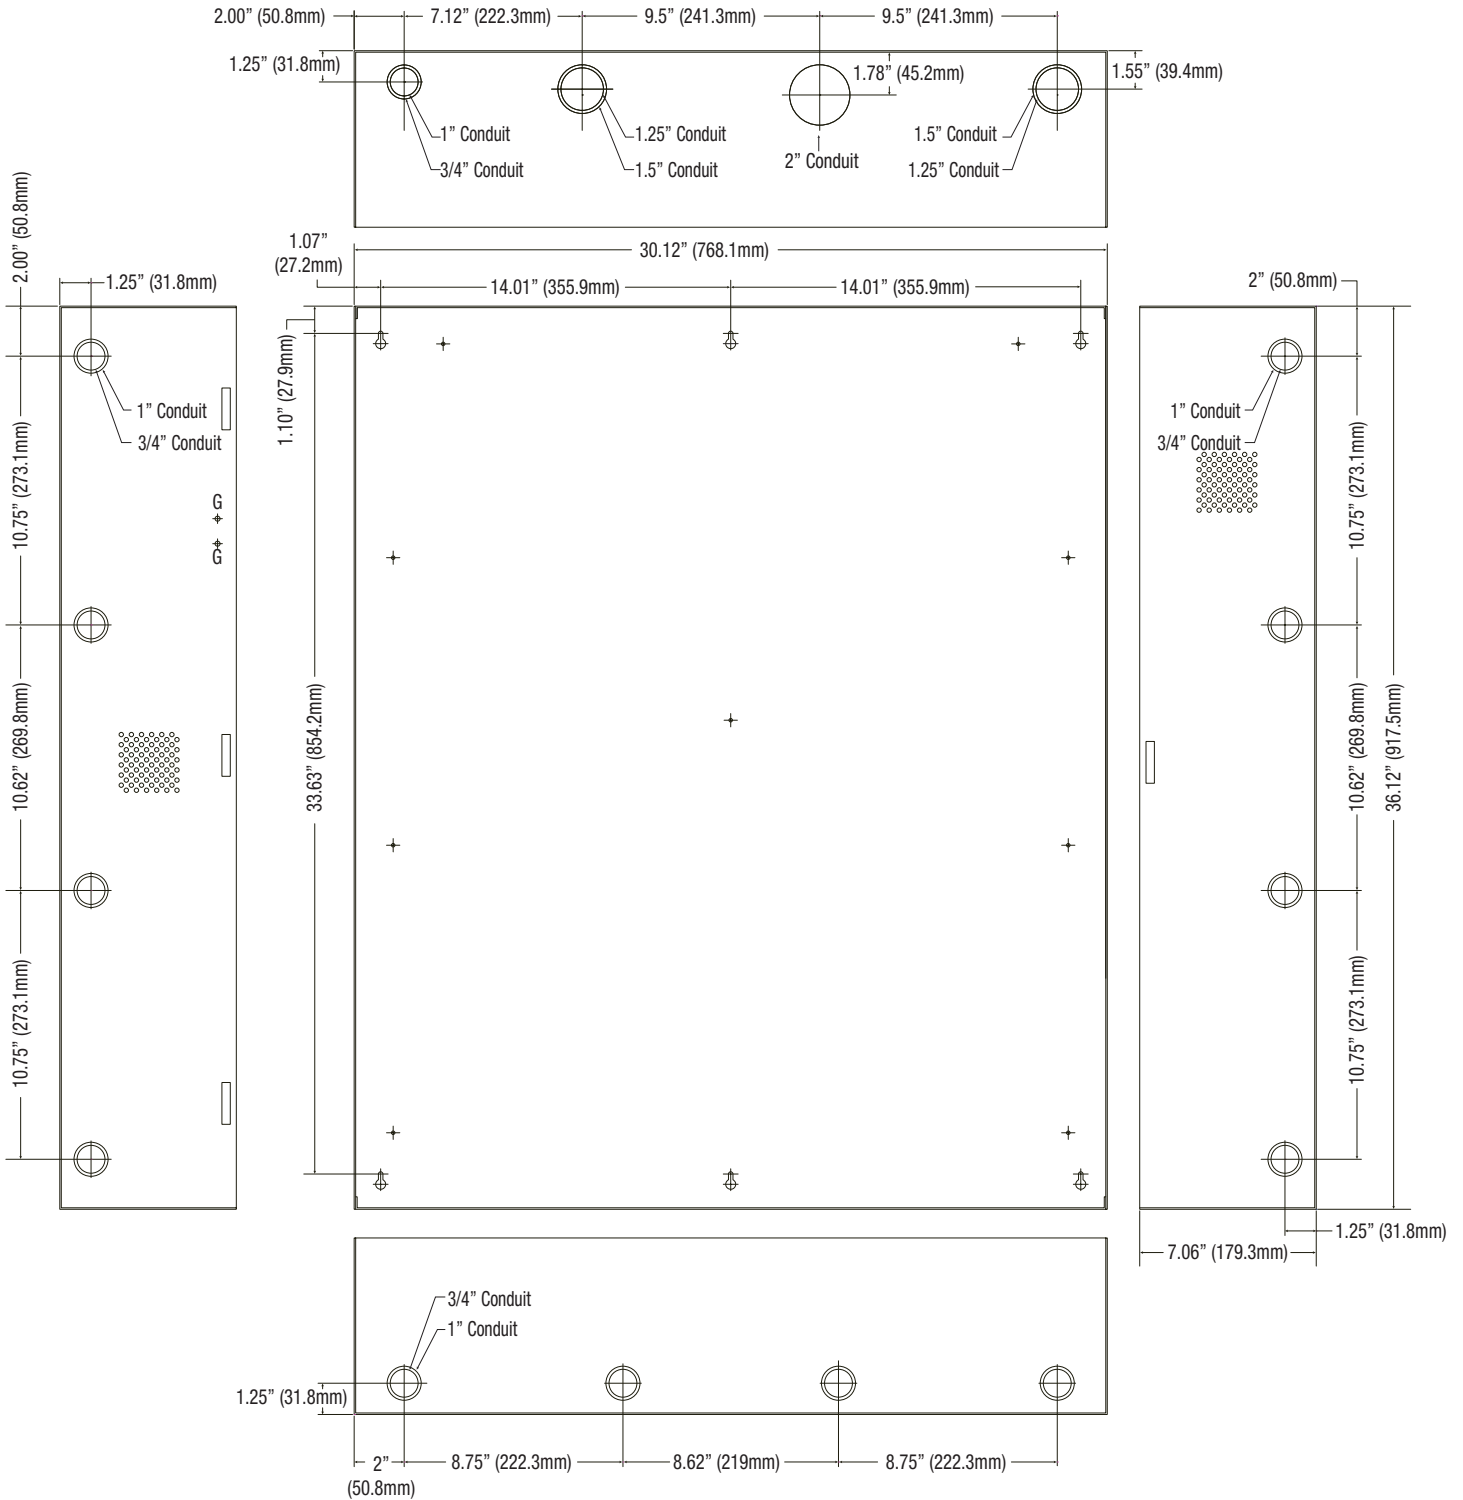

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
 website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
 IIT3HW75XKQ2 Kit Series

B05X

