

# 50-Pair 66 Wiring Block 25 Pk



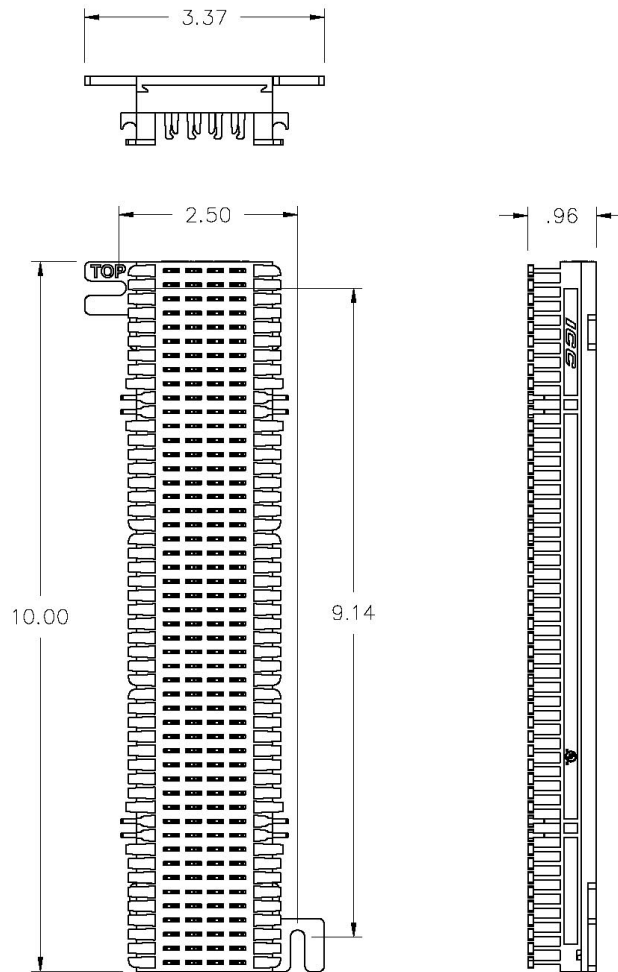
## Package Includes

A. 50-Pair 66 Wiring Block, 25 pcs

## Features and Benefits

- Designed for voice and data applications.
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2.
- Durable and strong high impact flame retardant material.
- Mounts on wall or on ICMB89B0WH 89B mounting bracket.
- Used with IC066BRCLP 66 wiring block bridging clips, IC066CV050 66 wiring block cover, and IC066LS050 66 wiring block labeling strips.
- Country Of Origin: Taiwan
- TAA Compliant

## Specifications

**NOTE: UNLESS OTHERWISE SPECIFIED**

## 1. ENVIRONMENTAL CONDITIONS:

- TEMPERATURE STORAGE
- STORAGE: -40 TO +70°C
- OPERATIONAL: -10 TO +60°C
- RELATIVE HUMIDITY (OPERATIONAL): MAXIMUM NONCONDENSING 93%

## 2. ELECTRICAL:

- ELECTRICAL INSULATION RESISTANCE: 500 MOHMS MIN. @ 100V D.C.
- DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS @ 60Hz FOR 1 MINUTE
- CONTACT RESISTANCE: 2.5 mOHMS MAX.

## 3. MECHANICAL:

- TRANSVERSE EXTRACTION FORCE: MINIMUM 5N FOR 24 AWG; MINIMUM 3N FOR 26 AWG
- INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
- IDC WIRE GAUGE: 22~26 AWG

## 4. PHYSICAL:

- HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V0
- IDC: BRASS PLATED WITH 100 MICRO-INCH OF Sn.

For warranty information, go online to [icc.com/warranty](http://icc.com/warranty).

Part No: IC066NBC50

Rev: A

Part No: IC066NBC50

Rev: A

Page 2 of 2

| 888-ASK-4ICC | [icc.com](http://icc.com) | [csr@icc.com](mailto:csr@icc.com) |

