
Prewired 25 Pair 66 Wiring Block w/Single Female Telco Connector

Package Includes:

- A. Prewired 25-Pair 66 Wiring Block, 1PC
- B. 89D Mounting Bracket, 1 PC
- C. 66 Wiring Block Cover, 1 PC
- D. Female Amphenol Connector, 1 PC

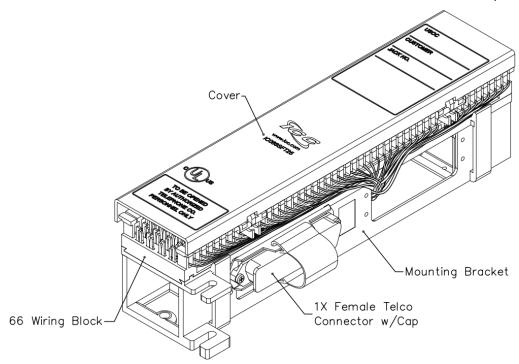

Features and Benefits

- Single prewired female amphenol connector facilitates installation and saves time.
- Designed for data, voice, PBX systems, and low voltage telecom equipment.
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2
- Durable and strong high impact flame retardant material.
- Includes removable 89D mounting bracket for wall mounting.
- Accommodates IC066BRCLP 66 wiring block bridging clips.
- Includes hook and loop tie security straps to maintain integrity of connection with telco assembly.
- Removable hinged cover provided.
- Accepts 22-26 AWG.
- Country Of Origin: Taiwan
- TAA Compliant

Part No: IC066SFT25

Rev: A Page 1 of 2 888-ASK-4ICC icc.com csr@icc.com



VIOLET/GRAY

VIOLET/BLUE

YELLOW/GREEN

YELLOW/BLUE

BLACK/GRAY

BLACK/BROWN

BLACK/GREEN

BLACK/ORANGE

BLACK/BLUE

RED/GRAY

RED/BROWN

RED/GREEN

RED/ORANGE

RED/BLUE

WHITE/BROWN

WHITE/GREEN

WHITE/BLUE

TIP

WHITE/ORANGE

WHITE/GRAY

YELLOW/ORANGE

18

17

16

15 14

13

12

11

10

9

8

6 5

4

3

2

PAIR NO.

GRAY/VIOLET

BROWN/VIOLET

GREEN/VIOLET

ORANGE/VIOLET

BROWN/YELLOW

GREEN/YELLOW

ORANGE/YELLOW BLUE/YELLOW

GRAY/BLACK

BROWN/BLACK

GREEN/BLACK

ORANGE/BLACK

BLUE/BLACK

GRAY/RED

BROWN/RED

GREEN/RED

ORANGE/RED

BLUE/RED

GRAY/WHITE

BROWN/WHITE


GREEN/WHITE

ORANGE/WHITE

BLUE/WHITE

RING

BLUE/VIOLET GRAY/YELLOW

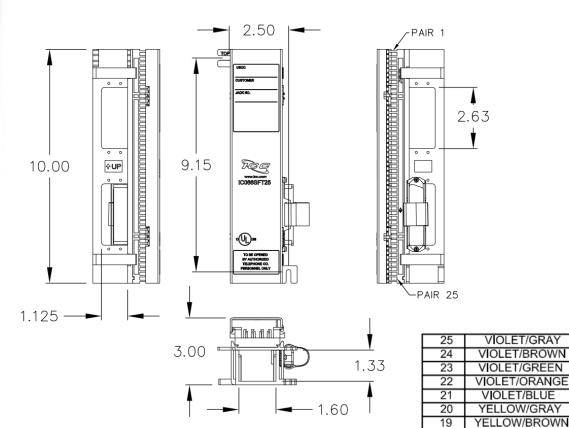

NOTE: UNLESS OTHERWISE SPECIFIED

1 MATERIAL:

A. HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL 94V0

B. IDC: BRASS WITH 100 MICRO-INCH OF TIN

C. TERMINALS: GOLD OVER NICKEL PLATED COPPER ALLOY

2 TEMPERATURE RANGE

A. STORAGE: -40° TO +70°C

B. OPERATION: -10° TO + 60°C

C. NONCONDENSING: 93%

3 ELECTRICAL

A. ELECTRICAL INSULATION RESISTANCE: -500 MOHM MIN @ 100V DC

B. DIELECTRIC WITHSTANDING VOLTAGE: -1000V RMS @ 60Hz FOR 1 MINUTE

C. CONTACT RESISTANCE: 2.5 MOHMS MAX

4 MECHANICAL:

A. EXTRACTION FORCE: MINIMUM 5N FOR 24 AWG & MINIMUM 3N FOR 26 AWG

B. INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM

C. DC WIRE GAUGE: 22-26 AWG

Part No: IC066SFT25

Rev: A Page 2 of 2 888-ASK-4ICC icc.com csr@icc.com



WIRE COLOR

Product Specification

Part No: IC066SFT25 Rev: A

Page 3 of 2

888-ASK-4ICC icc.com csr@icc.com

