

Maximal FV Series

Dual Power Supply Access Power Controllers (Fused)

Altronix Maximal FV Series Access Power Controllers distribute and switch power to access control systems and accessories. They convert a 220VAC 50/60Hz input into sixteen (16) independently controlled 12VDC or 24VDC fuse protected outputs. These Fail-Safe/Fail-Secure power outputs may be converted to dry form "C" contacts. The outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Keypad, Push Button, REX PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the sixteen (16) outputs.



Key Features

- Sixteen (16) independently controlled outputs
Output options:
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs
 - b) Sixteen (16) form "C" 5A rated relay outputs
 - c) Any combination of the above
- Sixteen (16) auxiliary power outputs (unswitched)
- Output fuses are rated @ 2.5A
- Filtered and electronically regulated outputs
- Supervision:
 - AC Fail
 - Battery Fail and Battery Presence
 - Low power shutdown
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the sixteen (16) outputs
- Alarm output relay indicates that FACP input is triggered.
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- CE European Conformity
- Lifetime Warranty

Accessories (order separately)



LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

Lifetime Warranty

Maximal FV Dual Power Supply Series Configuration Reference Chart

Altronix Model Number	220VAC 50/60Hz Input Current	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	DC Output Voltage Options								Maximum Supply Current for Main and Aux. Outputs (P/S 1 / P/S 2)	Fuse Protected Outputs	Class 2 Rated Power-Limited Outputs	Current per ACM8 Output (A)	ACM8 Board Input Fuse Rating
				Power Supply 1				Power Supply 2								
				[DC]		[AUX]		[DC]		[AUX]						
				12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC					
Maximal11FV	4.2A	5A/250V	7.5A/32V	eFlow4NBV				eFlow4NBV				–	16	✓	2.5	10A/250V
				✓	–	✓	–	✓	–	✓	–	3.3A + 3.3A				
				✓	–	✓	–	–	✓	–	✓	3.3A + 3.6A				
				–	✓	–	✓	–	✓	–	✓	3.6A + 3.6A				
Maximal33FV	4.2A	5A/250V	10A/32V	eFlow6NBV				eFlow6NBV				–	16	–	2.5	10A/250V
				✓	–	✓	–	✓	–	✓	–	5.3A + 5.3A				
				✓	–	✓	–	–	✓	–	✓	5.3A + 5.6A				
				–	✓	–	✓	–	✓	–	✓	5.6A + 5.6A				
Maximal55FV	4.2A	5A/250V	15A/32V	eFlow102NBV				eFlow102NBV				9.3A + 9.3A	16	–	2.5	10A/250V
				✓	–	✓	–	✓	–	✓	–					
Maximal75FV	4.8A	5A/250V 6.3A/250V	15A/32V	eFlow102NBV				eFlow104NBV				9.3A + 9.6A	16	–	2.5	10A/250V
				✓	–	✓	–	–	✓	–	✓					
Maximal77FV	5.4A	6.3A/250V	15A/32V	eFlow104NBV				eFlow104NBV				9.6A + 9.6A	16	–	2.5	10A/250V
				–	✓	–	✓	–	✓	–	✓					

Lifetime Warranty



Maximal FV Series

Dual Power Supply Access Power Controllers (Fused)



Specifications

Input

Voltage 220VAC (working range 198VAC - 256VAC),
50/60Hz

Input Fuse Varies, see Reference Chart

Outputs

Voltage 12VDC or 24VDC, see Reference Chart

Current Varies, see Reference Chart

Output Fuses 3.5A/250V

Auxiliary 3.5A (unswitched)

Other Overvoltage protection
Filtered and regulated outputs

Battery Charging

Capacity 12AH/12VDC (4 within enclosure)
40AH/65AH (requires separate enclosure)

Type Sealed lead acid or gel type

Fuse Rating Varies, see Reference Chart

Failover Upon AC loss, instantaneous

Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching, individually
selectable for any or all of the
sixteen (16) outputs

EOL 10K Resistor

Supervision

AC Failure Form "C" contacts

Battery Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops
below 71-73% for 12V units and 70-75% for 24V units
(depending on the power supply)

Prevents deep battery discharge

Indicators (LED)

Input 220VAC is present

DC Output Powered

Relays Individual LEDs indicate outputs are
triggered (relays energized)

FACP Indicates FACP disconnect is triggered

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
26" x 19" x 6.25" (660.4mm x 482.6mm x 158.8mm)

Shipping:
31" x 23" x 8.25" (787.4mm x 584.2mm x 209.6mm)

Enclosure accommodates up to four (4) 12VDC/12AH batteries

Weight (approx.)

Model	Product Weight	Shipping Weight
Maximal11FV	43 lb. (19.5 kg)	47 lb. (21.32 kg)
Maximal33FV	43.5 lb. (19.73 kg)	47.5 lb. (21.55 kg)
Maximal55FV	43 lb. (19.5 kg)	47 lb. (21.32 kg)
Maximal75FV	43.7 lb. (19.82 kg)	47.7 lb. (21.64 kg)
Maximal77FV	43.3 lb. (19.64 kg)	47.3 lb. (21.45 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.)

Model	12VDC	24VDC	12VDC and 24VDC
Maximal11FV	41	88	65
Maximal33FV	65	138	101
Maximal55FV	114	N/A	N/A
Maximal75FV	N/A	N/A	177
Maximal77FV	N/A	236	N/A

Lifetime Warranty


Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

Dimensions (H x W x D approximate)

26" x 19" x 6.25" (660.4mm x 482.6mm x 158.8mm)

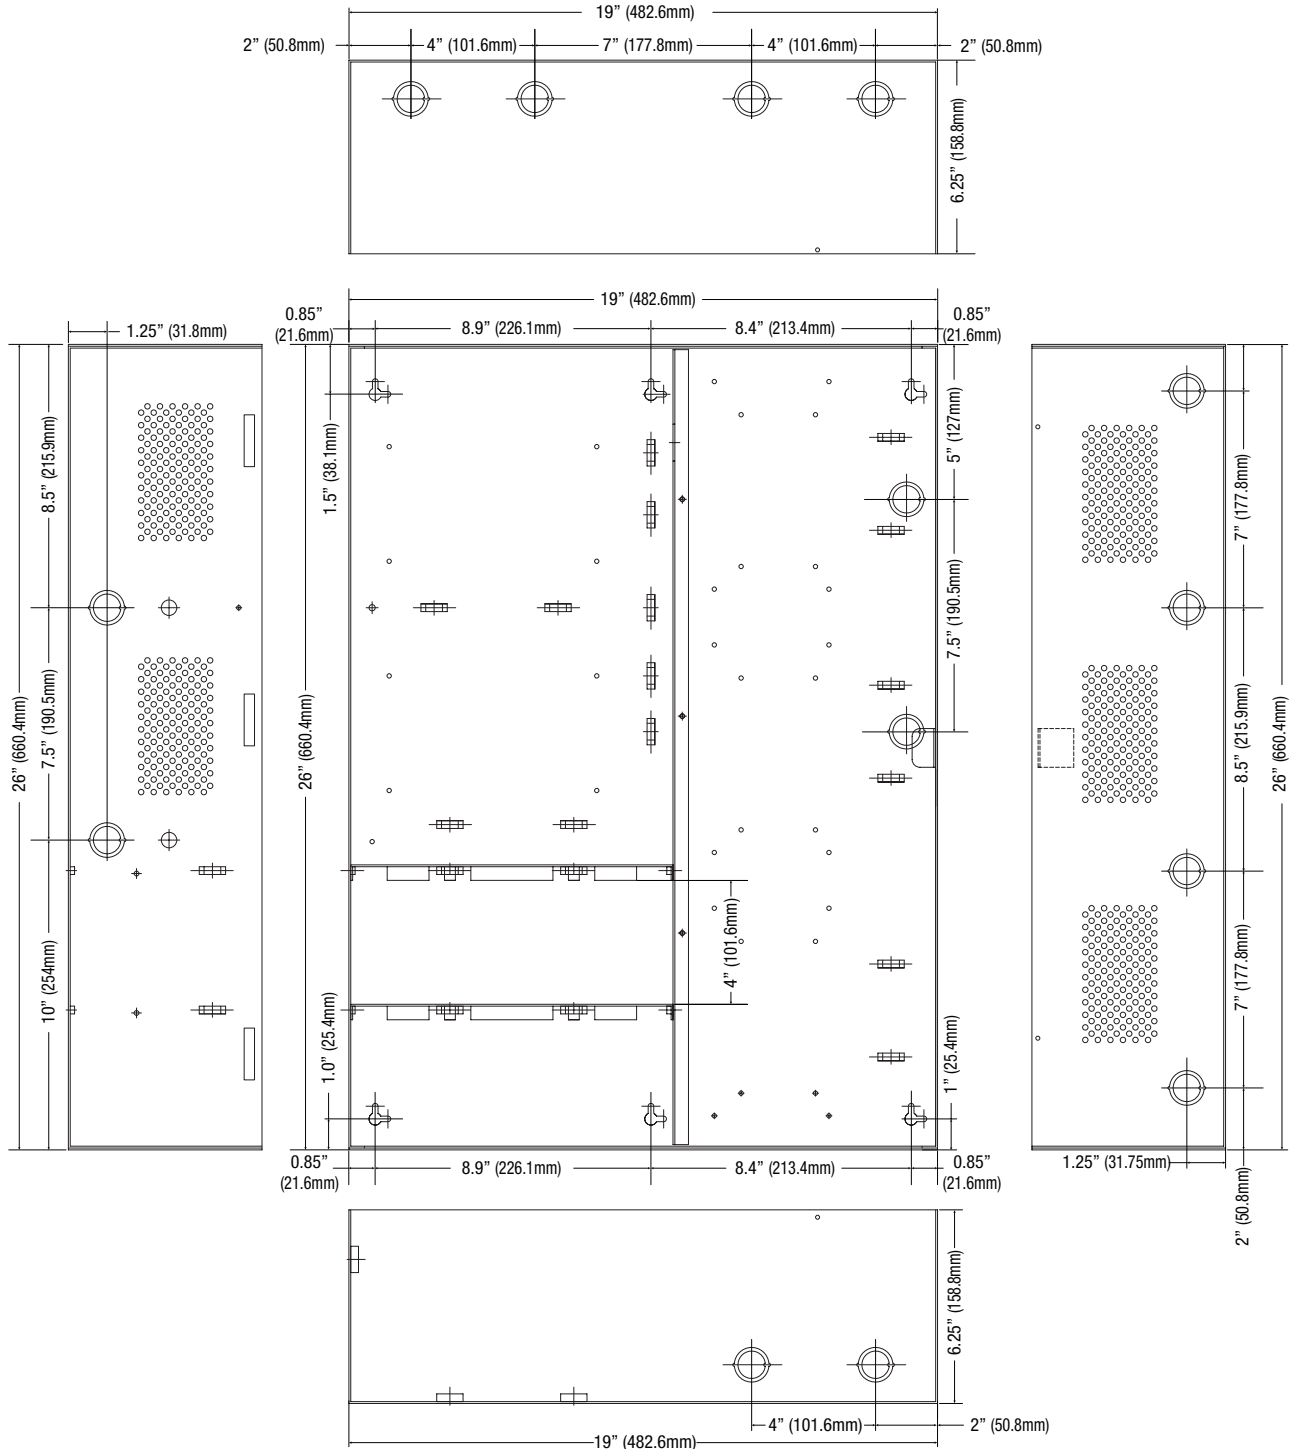

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com