# HES® 1500 Electric Strike

Works with all brands of cylindrical and mortise locksets without a deadbolt



Also available in a Complete One

The most advanced, modular electric strike that works with every brand of cylindrical or mortise locks designed to work with a 4-7/8" strike plate.

The HES 1500 Series Electric Strike sets a new standard in the industry by offering dynamic integrated adjustability and field configurable options compatible with any cylindrical or mortise lock. The modular design of the platform makes stocking and installing easier with interchangeable faceplates and accessories. For the first time, the aesthetics of an electric strike are complementary to other surrounding door hardware and blend in with the opening due to the fully finished design, available in eight finishes.

### **Features**

#### Standard Features

- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1 million cycles
- Field selectable fail safe/fail secure
- Non-handed
- Interchangeable faceplates and accessories
- Field replaceable components
- Fully finished faceplate, keeper, case and trim
- Field adjustable integrated shim
- Strike body depth 1-3/8" [34.9mm]
- SecuriCare ten-year, no-fault, no questions asked warranty

#### **Optional Features**

- LM Lock monitor
- **DLM** Dual lock monitors
- LMS Lock monitor and strike monitor
- **DLMS** Dual lock monitors and strike monitor

#### Accessories

- 157 Torx screws
- **HESCUT-MTK** Metal template kit
- 1500-104-xxx Lip extension trim adapter (finish to match)
- **1500-106-xxx** 4500 adapter and trim enhancer kit (finish to match)
- **OPT-1SRK** Spring replacement kit
- **OPT-1LM** Single lock monitor
- **OPT-1DLM** Dual lock monitors
- MOD-1SOL Solenoid replacement module































# **Specifications**

#### Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 listed
- RoHS compliant
- UL 10C fire rated, 3-hour single door (fail secure only)
- UL 10C fire rated, 1-1/2 hour double door (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- California Fire Marshal listed
- ANSI/SDI A250.13 windstorm resistant
- Florida Building Code approved TAS 201, 202, 203
- ANSI-ASTM E330
- Sustainability documentation


#### **Frame Application**


- Metal
- Wood

#### **Electrical (DC Continuous Duty)**

- Dual voltage 12/24 VDC/VAC
- 240 mA at 12 VDC/120 mA at 24 VDC
- PoE friendly

# **Dimensions**

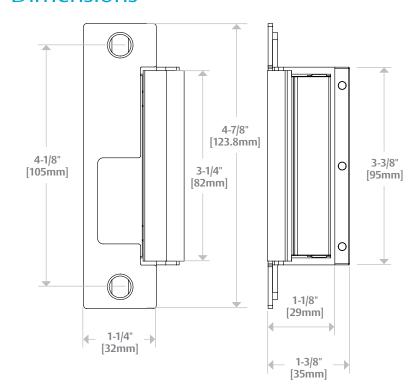



## How to Order

SERIES	MODEL	FINISH*	OPTION (S)
1500	_	<b>–</b> 630	– LM
1500 Universal Electric Strike; faceplate option kits ordered separately	C* Complete Electric Strike; includes 1LB faceplate kit for latchbolts	<b>605</b> Bright Brass	<b>LM</b> Lock Monitor
		<b>606</b> Satin Brass	<b>DLM</b> Dual Lock Monitor
		<b>612</b> Satin Bronze	LMS Lock Monitor and Strike Monitor
		613 Bronze Toned	
		<b>613E</b> Dark Oxidized Satin Bronze Powder	
		<b>629</b> Bright Stainless Steel	
		630 Satin Stainless Steel	
		BSP Black Suede Powder	

\*Complete Pacs are only available in the 630 finish

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.