

Maximal FD Series

Dual Power Supply Access Power Controllers (PTC)

Altronix Maximal FD Series Access Power Controllers distribute and switch power to access control systems and accessories. They convert a 120VAC, 60Hz input into sixteen (16) independently controlled 12VDC or 24VDC Class 2 Rated PTC protected power-limited auto-resettable outputs. Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. Units will route power to a variety of access control hardware devices including: Mag Locks, Electric Strikes, Magnetic Door Holders, etc. Outputs will operate in both Fail-Safe and/or Fail-Secure modes. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the sixteen (16) outputs.



Maximal33FD

Key Features

- Sixteen (16) independently controlled Fail-Safe and/or Fail-Secure Class 2 Rated PTC protected power-limited outputs
- Sixteen (16) auxiliary power outputs (unswitched)
- Output PTCs are rated @ 2.5A
- Filtered and electronically regulated outputs
- Supervision:
 - AC Fail
 - Battery Fail and Battery Presence
 - Low power shutdown
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the sixteen (16) outputs
- Alarm output relay indicates that FACP input is triggered
- Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input
 - b) Polarity reversal input from FACP signaling circuit
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- UL Listed in the U.S. and Canada
- CE European Conformity
- Lifetime Warranty

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email

Lifetime Warranty

Maximal FD Series

Dual Power Supply Access Power Controllers (PTC)



Maximal FD Dual Power Supply Series Configuration Reference Chart

Altronix Model Number	120VAC 60Hz Input Current	Power Supply Board Input Fuse Rating	Power Supply Board Battery Fuse Rating	DC Output Voltage Options								Maximum Supply Current for Main and Aux. Outputs (P/S 1/ P/S 2)	Class 2 Rated PTC Protected Power-Limited Outputs (auto-resettable)	Current per ACM8CB Output (A)	ACM8CB Board Input Fuse Rating
				Power Supply 1				Power Supply 2							
				[DC]		[AUX]		[DC]		[AUX]					
				12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC				
Maximal11FD	7A	5A/ 250V	7.5A/ 32V	eFlow4NB				eFlow4NB				-	16	2.5	10A/ 250V
				✓	-	✓	-	✓	-	✓	-	3.3A + 3.3A			
				✓	-	✓	-	-	✓	-	✓	3.3A + 3.6A			
				-	✓	-	✓	-	✓	-	✓	3.6A + 3.6A			
Maximal33FD	7A	5A/ 250V	10A/ 32V	eFlow6NB				eFlow6NB				-	16	2.5	10A/ 250V
				✓	-	✓	-	✓	-	✓	-	5.3A + 5.3A			
				✓	-	✓	-	-	✓	-	✓	5.3A + 5.6A			
				-	✓	-	✓	-	✓	-	✓	5.6A + 5.6A			
Maximal55FD	7A	5A/ 250V	15A/ 32V	eFlow102NB				eFlow102NB				9.3A + 9.3A	16	2.5	10A/ 250V
				✓	-	✓	-	✓	-	✓	-				
Maximal75FD	8A	5A/250V 6.3A/250V	15A/ 32V	eFlow102NB				eFlow104NB				9.3A + 9.6A	16	2.5	10A/ 250V
				✓	-	✓	-	-	✓	-	✓				
Maximal77FD	9A	6.3A/250V	15A/ 32V	eFlow104NB				eFlow104NB				9.6A + 9.6A	16	2.5	10A/ 250V
				-	✓	-	✓	-	✓	-	✓				

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Maximal FD Series

Dual Power Supply Access Power Controllers (PTC)



Specifications

Input

Voltage 120VAC, 60Hz
Input Fuse Varies, see Reference Chart

Outputs

Class 2 Rated power-limited PTC Protected Outputs (auto-resettable)
Voltage 12VDC or 24VDC, see Reference Chart
Current Varies, see Reference Chart
Output PTCs 2.5A
Auxiliary 3.5A (unswitched)
Other Overvoltage protection
Filtered and regulated outputs

Battery Charging

Capacity 12AH/12VDC (4 within enclosure)
40AH/65AH (requires separate enclosure)
Type Sealed lead acid or gel type
Fuse Rating Varies, see Reference Chart
Failover Upon AC loss, instantaneous
Batteries are sold separately

Fire Alarm Disconnect

Supervised Latching or non-latching, individually selectable for any or all of the sixteen (16) outputs
EOL 10K Resistor

Supervision

AC Failure Form "C" contacts.
Battery Form "C" contacts.

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply)
Prevents deep battery discharge.

Indicators (LED)

Input 120VAC is present.
DC Output Powered.
Relays Individual LEDs indicate outputs are triggered (relays energized)
FACP Indicates FACP disconnect is triggered

Agency Listings

UL:
UL294 Access Control System Units
cUL:
ULC-S319-05 Electronic Access Control Systems
Class I equipment
CSA C22.2 No.205 Signal Equipment
CSFM California State Fire Marshall Approved
CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
26" x 19" x 6.25" (660.4mm x 482.6mm x 158.8mm)
Shipping:
31" x 23" x 8.25" (787.4mm x 584.2mm x 209.6mm)
Enclosure accommodates up to four (4) 12VDC/12AH batteries

Weight (approx.)

Model	Product Weight	Shipping Weight
Maximal11FD	32.4 lb. (14.7 kg)	39.4 lb. (17.9 kg)
Maximal33FD	32.6 lb. (14.8 kg)	39.6 lb. (18 kg)
Maximal55FD	32.5 lb. (14.75 kg)	39.5 lb. (17.9 kg)
Maximal75FD	32.6 lb. (14.8 kg)	39.6 lb. (18 kg)
Maximal77FD	32.8 lb. (14.9 kg)	39.8 lb. (18.1 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)
Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity

85% +/- 5%

BTU/Hr (approx.)


Model	12VDC	24VDC	12 and 24VDC
Maximal11FD	41	88	65
Maximal33FD	65	138	101
Maximal55FD	114	N/A	N/A
Maximal75FD	N/A	N/A	177
Maximal77FD	N/A	236	N/A

Lifetime Warranty

Dimensions and Drawing

Dimensions (H x W x D approximate)

26" x 19" x 6.25" (660.4mm x 482.6mm x 158.8mm)

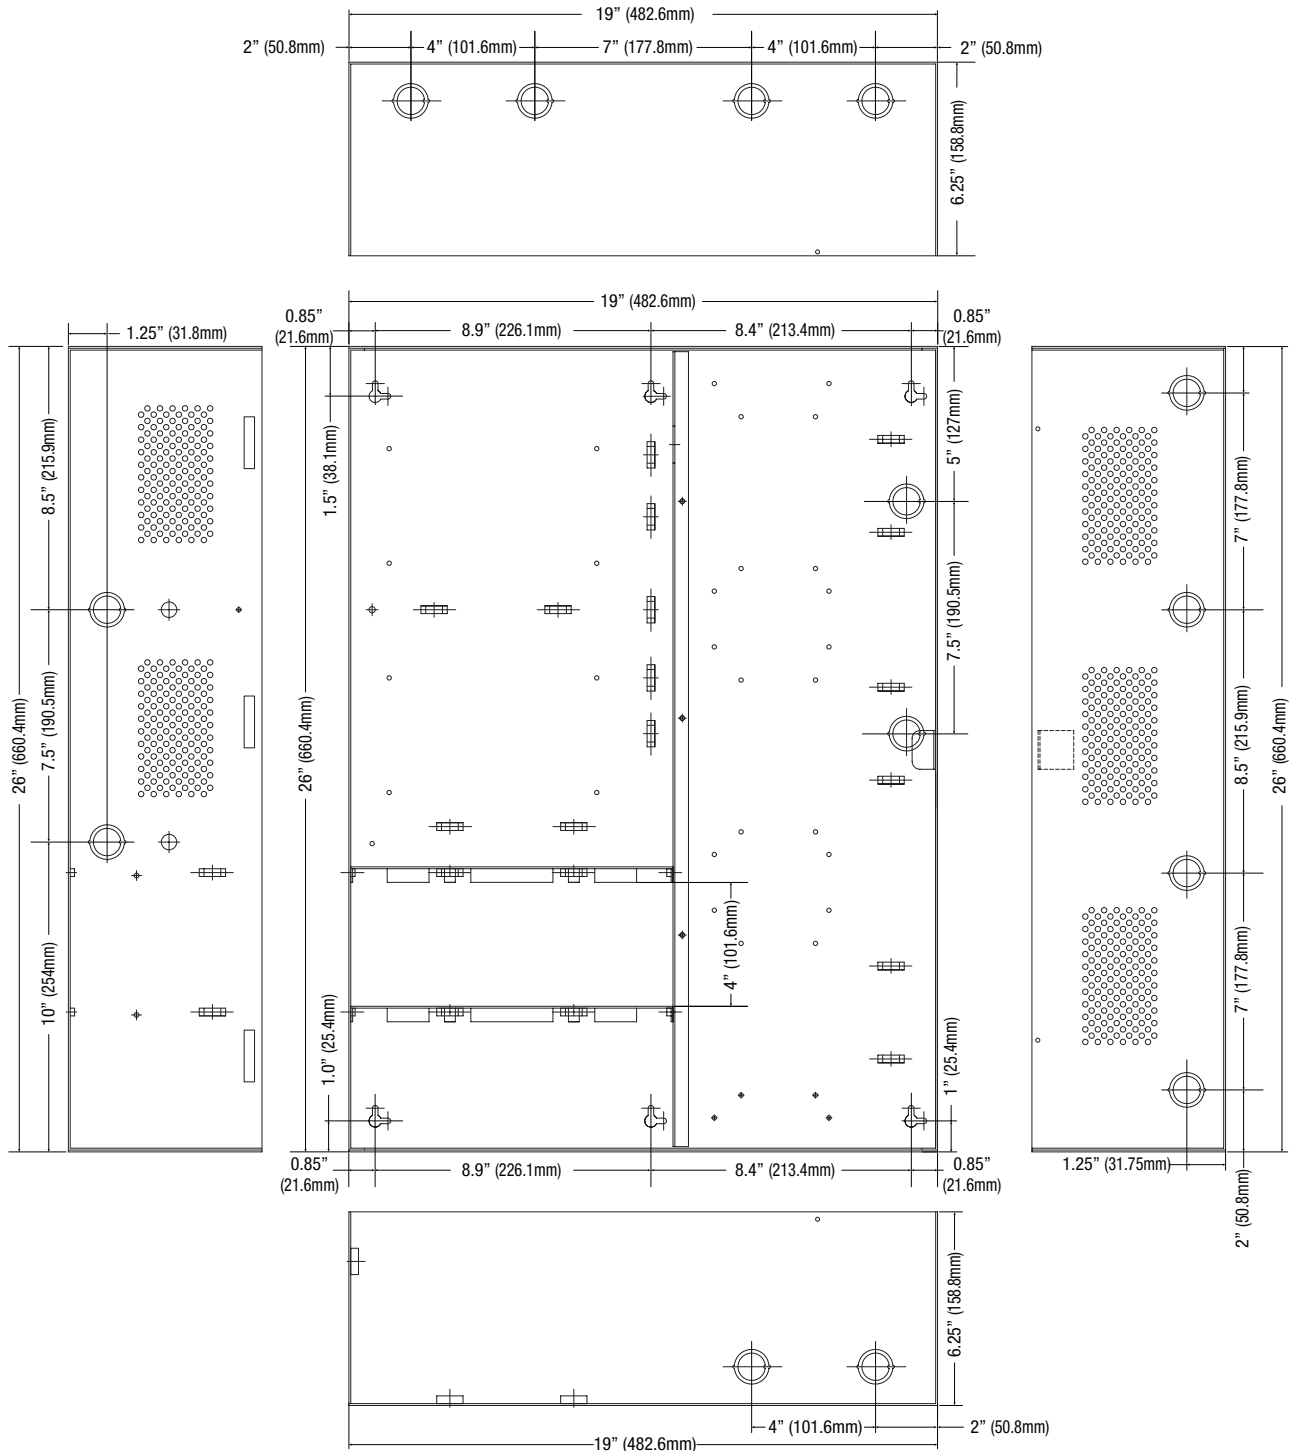

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com