

## DS-K1104Mx Series

### Vandal-Resistant Card Reader

- LED Reader Status Indicator
- Tamper-Resistant Alarm
- Supports Mifare Cards
- Keypad (Option)
- RS-485 and Wiegand (W26/W34) Protocols

Hikvision's DS-K1104 Series vandal-resistant card readers with DIP switch are rated IK10. They support RS-485 and Wiegand (W26/W34) protocols. Contains a built-in Mifare 13.56 MHz card reading module. Meets ISO 14443-A standards.

**Available Models:** DS-K1104M: Mifare card reader  
DS-K1104MK: Mifare card reader w/keypad



DS-K1104M




DS-K1104MK

## Specifications

	DS-K1104M	DS-K1104MK
Power Supply	12 VDC	
Working Current	□ 500 mA	
Processor	32-bit	
Reading Frequency	13.56 MHz	
Reading Range	□ 1.97" (□ 50 mm)	
ID Settings	DIP switch	
Audio Alert	Beeper	
Power Consumption	□ 2 W	
Keypad	No keypad	Keypad w/12 keys (0 to 9, *, #)
Certifications	CE, FCC, UL 60950-1	
LED Indicator	Power indicator; status LED indicator	
Working Temperature	-4° to +149° F (-20° to +65° C)	
Working Humidity	10% to 90% (non-condensing)	
Protection Level	IP 65	
Dimensions	4.65" x 2.99" x 0.91" (118 mm x 76 mm x 23 mm)	
Weight	□ 18.34 oz (□ 0.52 kg)	
Installation Method	Standard U.S. single gang box	

## Dimensions (Units: mm)

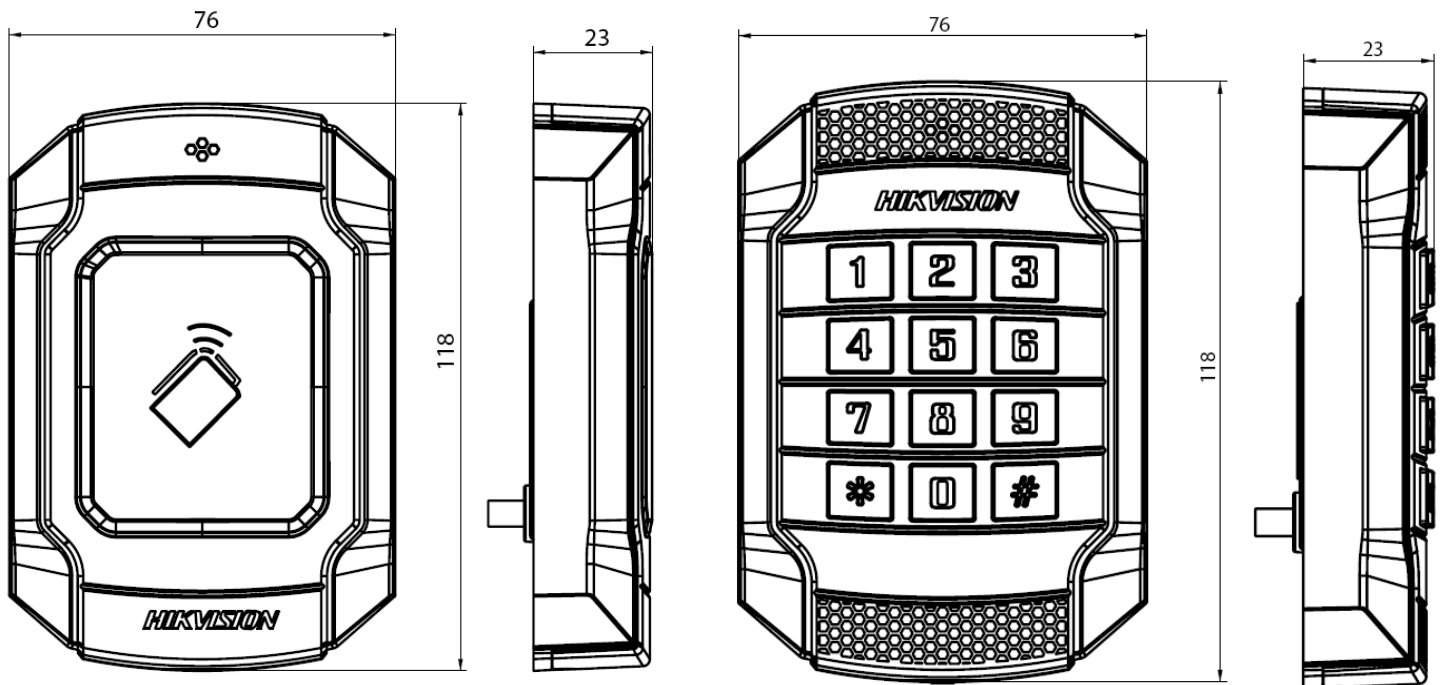

DS-K1104M

DS-K1104MK