

Product End-of-Life Instructions

Smart-UPS On-Line



Schneider
Electric

Product End-of-Life Instructions – EoLI

Product overview

Product Range: Smart-UPS® On-Line

Marketing Model/Name: Smart-UPS Online® SRT(XXXXX)(RM)XL(Y)M or SRV(XXXXX)(RM)XL(Y)M where XXXX is a number between 5K and 10K, Y is “A”, “I”, “T” or “W” and RM is optional.

Size: H x L x D in mm = **263 x 432 x 715**

Weight in kg = **between 54.5 and 112 kg without packaging**

Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Note:

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE).


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse → Separation for special treatment → Other dismantling → Shredding

CAUTION:

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

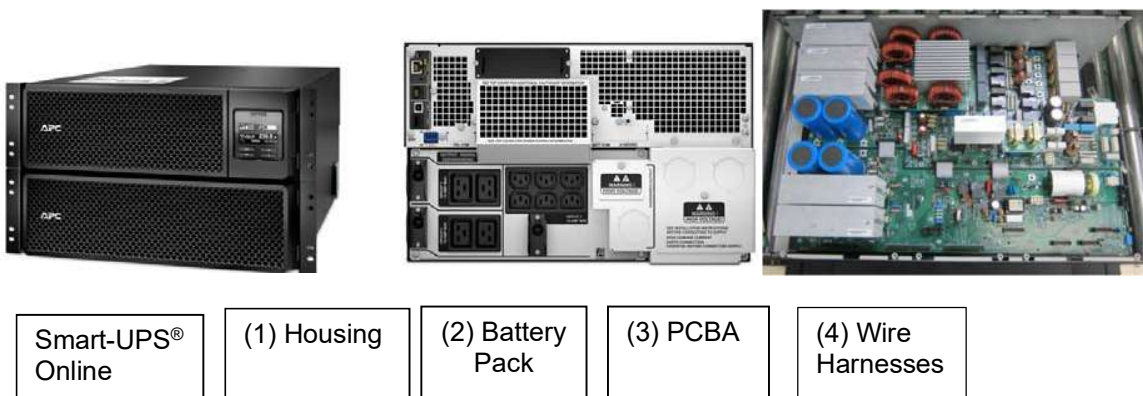

Product End-of-Life Instructions – EoLI

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	(3)	Sealed Lead Acid Batteries	150-5000	<p>See: RBC, Battery Module, Extended Run Time Battery Module for End of Life Instructions of battery pack.</p> <p>Use authorized battery recycler</p> <p>See: Material Safety Data Sheet Available at www.apc.com</p> <p>Caution: Batteries may contain and electrical charge- avoid creating short across terminals.</p> <p>Caution: Cracked or bloated batteries may be hazardous and represent a lead (Pb) exposure.</p>
Special treatment	(5)	Cables with PVC wire wrap, Plugs made with PVC	160-2160 each	<p>Brominated flame retarded (BFR) PVC with tin-lead (SnPb) soldering.</p>
Special treatment	(4)	Printed Circuit Boards (PCBA)	500-2500 each	<p>Brominated flame retarded (BFR) FR4 laminate with tin-lead (SnPb) solder and miscellaneous electronic components.</p> <p>Components of concern include relays and electromechanical switches which may contain cadmium (Cd) based contacts and capacitors.</p> <p>Note: Capacitors in this product range may have a height greater than 2.5cm.</p>

EoLI achieved with Schneider-Electric TT03 V5 procedure

Schneider Electric Industries SAS

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com