





ASSEMBLY INSTRUCTION

etherCON® | NE8MX & NE8MX-B

Ruggedized RJ45 Data Cable Connector Carrier

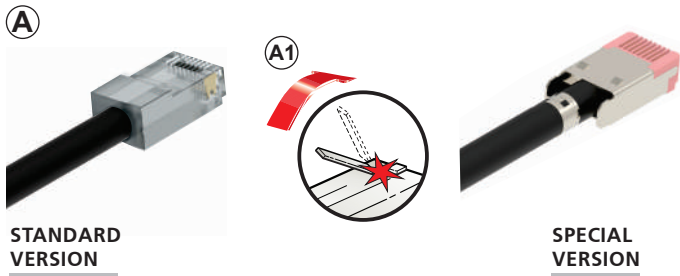


- Ⓐ Special version remove the cover.
- Ⓐ1 Cut off the release tab of RJ45 plug.

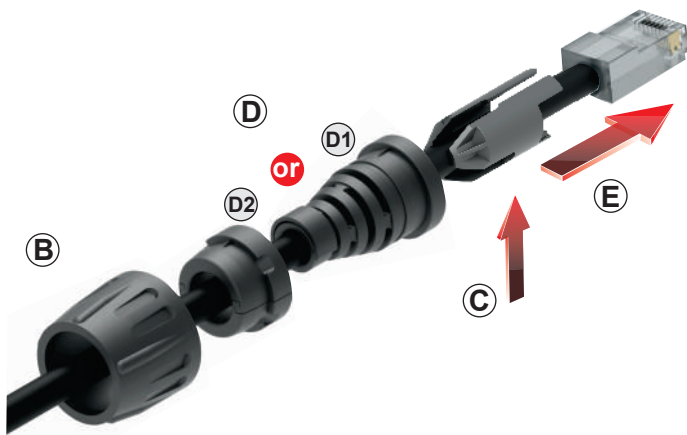


- Ⓑ Slide the bushing over the connector onto the cable.
- Ⓒ Put the chuck onto the cable. Align the opening with the contact side.
- Ⓓ Put the suitable boot on the cable:
 - D1: for cable O.D. 4.5 [0.18"] to 5 mm [0.2"]
 - D2: for cable O.D. 5.0 [0.2"] to 8 mm [0.3"]

STANDARD
VERSION

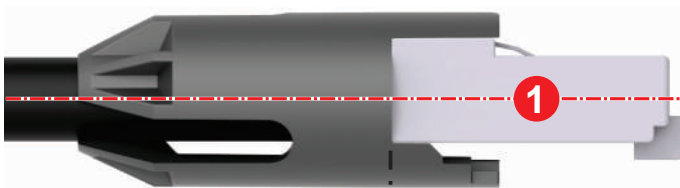

SPECIAL
VERSION

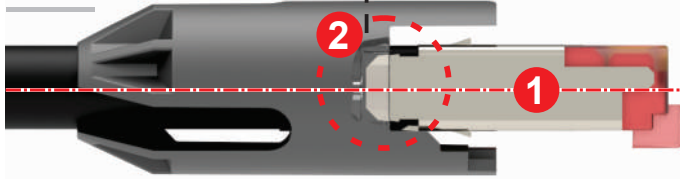


- Ⓔ Position the RJ45 in the chuck.

Attention:

- 1 RJ45 must be straight.
- 2 Special versions must engage in the inner recess of the chuck.



F Position the bushing onto the chuck.

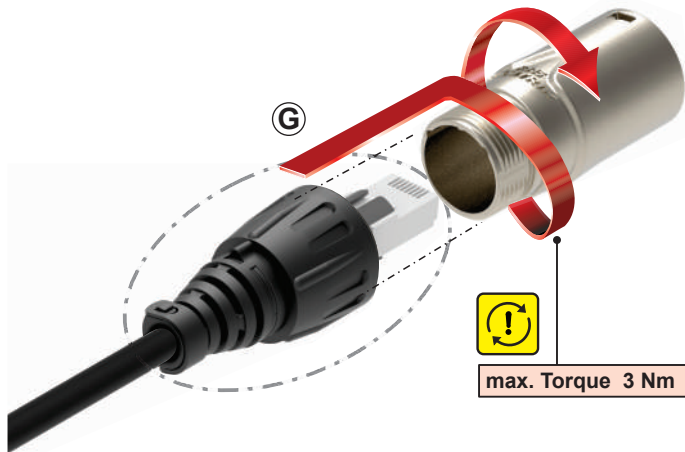

G Slide the unit (insert and boot) into the housing and tighten the bushing with **max. torque 3 Nm (2.2 lb-ft).**



H CAUTION:

There is no overlap allowed.



I Close the seal of the boot.

FINISHED etherCON® NE8MX:

Find more etherCON® details on www.neutrik.com.



NEUTRIK AG LI T: +423/237 24 24 F: +423/232 53 93
 NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704/438 9202
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983/811 439
 NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131/280 830

NEUTRIK France FR T: +33 1/4131 6750 F: +33 1/4131 0511
 NEUTRIK Tokyo Ltd. JP T: +81 3/3663 4733 F: +81 3/3663 4796
 NEUTRIK Hong Kong Ltd. HK T: +852/2687 6055 F: +852/2687 6052
 NEUTRIK India Pvt. Ltd. IND T: +91/982 05 43 424 F: +91/22 26163 540

Draft. Nr.: BDA 563-V2 | Update: 22.05.2019 | Data subject to change without prior notice. ©2019 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® & etherCON® are registered trademark.