

T2KE3316D (Kit)

Access & Power Integration Solution for Kisi



Altronix T2KE3316D kit consists of Trove2 enclosure, TDR2 Kisi/Altronix backplane with two (2) 12 or 24VDC @ 6A power supply/chargers, and two eight (8) PTC protected output access control modules. This kit also accommodates up to four (4) Kisi Pro Controllers for up to sixteen (16) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.



T2KE3316D

Kisi boards are not included

Key Features

- 12 or 24VDC power supply/chargers
- Accommodates up to four (4) Kisi Pro Controllers
- Includes twenty (20) mounting magnets for Kisi Pro Controller
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Specifications

Two (2) Power Supply/Chargers (AL600ULXB):

Input

Voltage 115VAC, 60Hz, 3.5A max.
 Input Fuse 5A/250V

Outputs

Voltage 12VDC or 24VDC selectable.
 Current 6A @ 12VDC or 24VDC continuous max.
 Other Overvoltage protection. Filtered and regulated

Battery Charging

Capacity 12AH/12VDC (2 within enclosure)
 40AH/65AH (requires separate enclosure)
 Type Sealed lead acid or gel type
 Failover Upon AC loss, instantaneous
 Batteries are sold separately

Supervision

AC Failure Form "C" contacts
 Battery Form "C" contacts

Indicators (LED)

Input 115VAC is present
 DC Output Powered
 Battery Discharged or not connected

Two (2) Access Power Controllers (ACM8CB):

Input

Voltage 24VDC from AL600ULXB
 Input Fuse 10A/250V

Outputs

Voltage 24VDC
 Eight (8) 24VDC independently controlled PTC outputs:
 a) Fail-Safe and/or Fail-Secure power outputs
 Form "C" Relays rated 28VAC or VDC @ 2.5A
 b) Auxiliary power outputs (unswitched)
 c) Any combination of the above

Output PTCs 2.5A

Indicators (LED)

Red LEDs Outputs are triggered (relays energized)
 Green LED FACP disconnect is triggered

T2KE3316D Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies
 Please refer to the corresponding Sub-Assembly Installation Guides
 for further information

CE European Conformity

Physical and Environmental

Dimensions (H x W x D)

Enclosure:
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)
 Shipping:
 32.5" x 26.5" x 11.125" (825.5mm x 673.1mm x 282.6mm)

Weight (approx.)

Product 54.7 lb. (24.8 kg)
 Shipping 59.7 lb. (27.1 kg)

Temperature


Operating 0°C to 49°C (32°F to 120°F)
 Storage - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%
BTU/Hr (approx.):
 12VDC: 74 BTU/Hr.
 24VDC: 148 BTU/Hr.
 12VDC and 24VDC: 111 BTU/Hr.

Access Controller Position Chart for the Following Models:

Kisi	Pem Mounting
Pro Controller	(A)

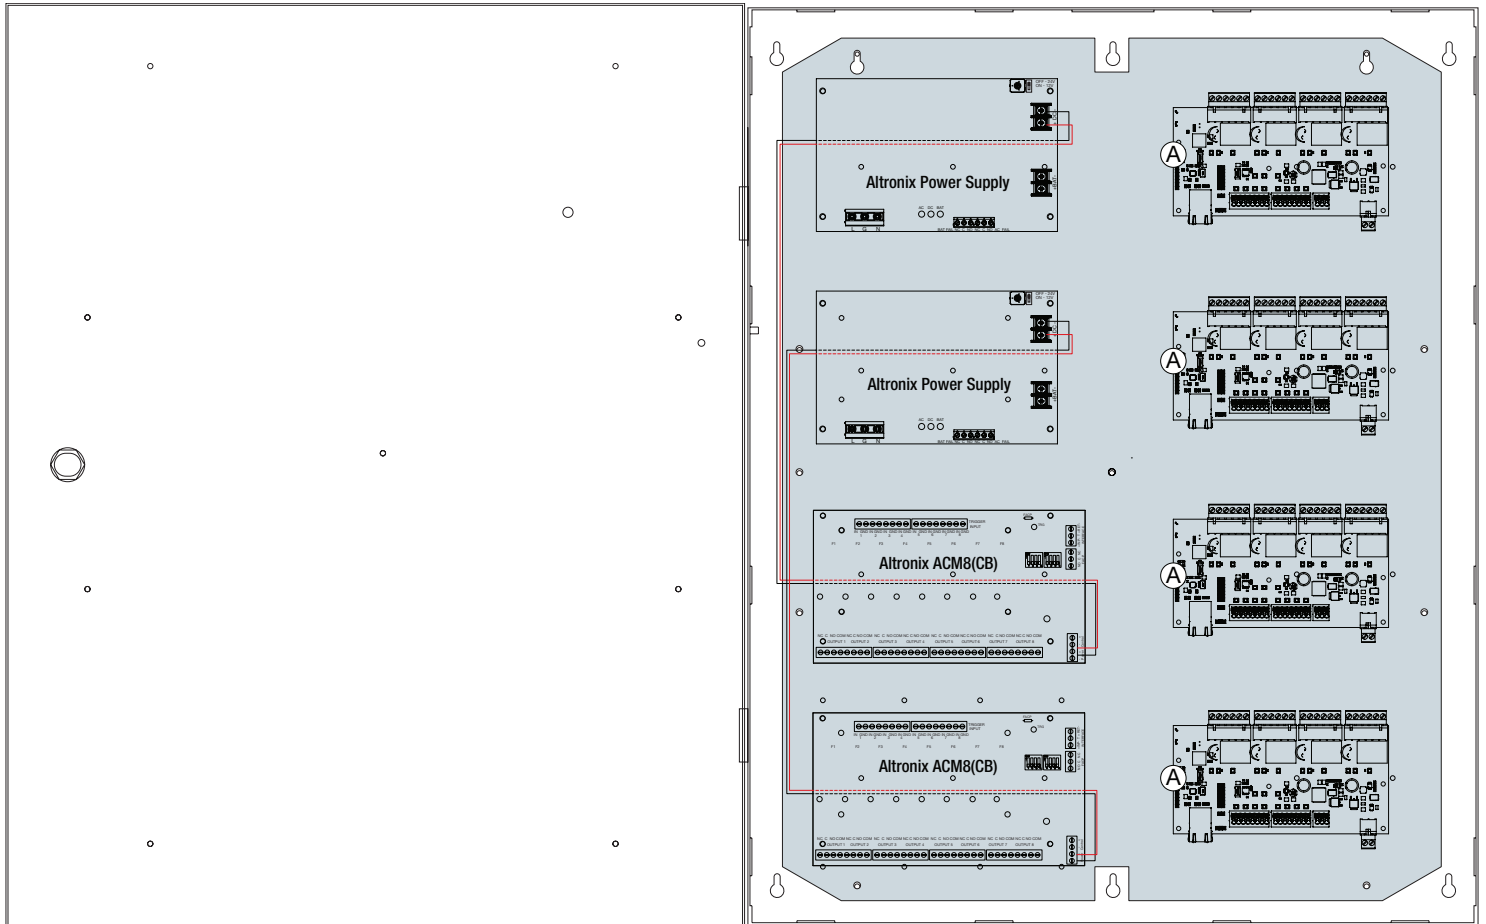

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)
 27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

