



Metal Reader

The Metal Reader is modern and sleek for indoor applications, yet durable enough for even the toughest outdoor conditions. A stylish faded split design on the surface allows the free flow of signal providing up to a two-inch maximum sensing distance to enhance the user swiping experience.

Model

PN: RDRMM

Specifications:

Input

Frequency: 125 KHZ
Read Range: up to 1.9"

Output

Wiegand protocol
Cable Distance: Wiegand 500' (22 AWG)

Environmental

Temperature: -4° ~ +122° F or -20° ~ +50° C
Humidity: 0 - 95% relative humidity, non-condensing
Protection Rating: IP65

Enclosure


Dimensions: (W x H x D) 1.88" x 4.05" x 0.86"
Weight: 0.94 lbs / 15.1 oz / 430 g

Power

10.8 - 12V DC (Linear power supply recommended)

Manufacturer's Limited Warranty

One to five-year warranty against defects in materials and workmanship. For full details visit prodatakey.com.

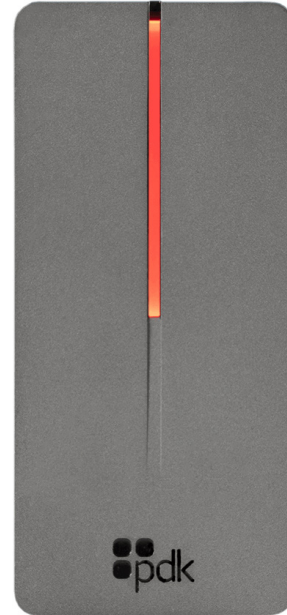

Visit the ProdataKey dealer website prodatakey.com/partner-portal to access marketing, installation, and support resources. For questions about the PDK Metal Reader, please contact support@prodatakey.com