

QSE-CI-NWK-E Control Interface

The QSE-CI-NWK-E is a versatile integration access point for Lutron QS-based systems. Through either RS232 or TCP/IP over Ethernet, third-party devices can control and/or monitor a QS system.

Features

- Easily integrate with touchscreens, PCs, A/V systems, or other digital systems and devices
- Control and monitor GRAFIK Eye QS, Sivoia QS, Energi Savr Node, and other products on the wired QS link
- Monitor lighting scenes, levels, shade positions and more. For a full list of commands see Integration Protocol document (P/N 040249) at www.lutron.com
- Up to 10 QSE-CI-NWK-E control interfaces are allowed per QS link
- The QSE-CI-NWK-E is compatible with Athena, Quantum, QS standalone, and HomeWorks systems. For a complete list of compatible components see the Lutron Integration Protocol document (P/N 040249) at www.lutron.com
- BAA-compliant model number available (UQSE-CI-NWK-E)*

* For a complete list of BAA/TAA compliant products, please visit our website at www.lutron.com/BAA



Specifications

Regulatory Approvals

- RoHS Compliant
- CE Marked
- NOM
- cULus

Power

- SELV/PELV/NEC® Class 2
- Operating voltage: 24 – 36 V $\overline{=}$ 65 mA

QS Link Limits

- The QS wired communications link is limited to 100 devices and 100 zones. Each QSE-CI-NWK-E control interface counts as 1 device and 0 zones
- Each QSE-CI-NWK-E control interface consumes 2 Power Draw Units (PDU) on the QS link. Refer to the QS Link Power Draw Units Specification Submittal (P/N 369405) at www.lutron.com for more information
- The maximum wiring length for the QS link is 2000 ft (610 m)

Environment

- 32 °F to 104 °F (0 °C to 40 °C)
- Relative humidity less than 90% non-condensing
- Indoor use only
- Unit generates heat, maximum 8 BTU/hr

Integration Features

- Monitoring: Current scene, zone level, button presses, shade group levels
- Control: Scene selection, scene lockout, zone lockout, sequencing, zone raise/lower, master raise/lower, set shade group level, simulate button press/release
- For the full list of features and commands, please refer to the Integration Protocol document (P/N 040249) at www.lutron.com

Compatible Components

- Compatible with most QS devices. For a complete list of compatible components see Integration Protocol document (P/N 040249) at www.lutron.com

Requirements

- QS Link Power Supply, such as a:
 - GRAFIK Eye QS
 - QS Link power supply, such as the QSPS-P1-1-50
 - Energi Savr Node QS
- QS Communication Link - SELV/PELV/NEC® Class 2 (see QS Link Wire Sizes table)


Protocol

- Integration Protocol document (P/N 040249) at www.lutron.com

RS232 Connection

- Standard 9-pin female serial connector on interface
- 50 ft (15 m) maximum serial cable length
- Dip switches are set at factory, all Off
- Dip switches are used to set RS232 baud rate:

DIP Switch Settings for RS232 Baud Rate

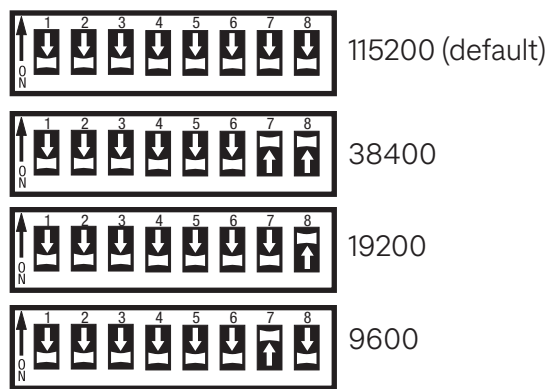

Ethernet Connection


- Standard CAT5 (or better) cable, 328 ft (100 m) maximum, connects the QSE-CI-NWK-E interface to a PC or other Ethernet source
- Supports MDI/MDIX auto-crossover (no crossover cable needed)
- Auto-negotiation of 10 or 100 Mbps speed and full- or half-duplex operation
- Default IP address is 192.168.250.1. Can be changed using the Lutron Device IP tool

Note: Either the RS232 or the Ethernet can be used, but not both

Job Name:	Model Numbers:	
Job Number:		

Dimensions

Dimensions are in inches (mm)

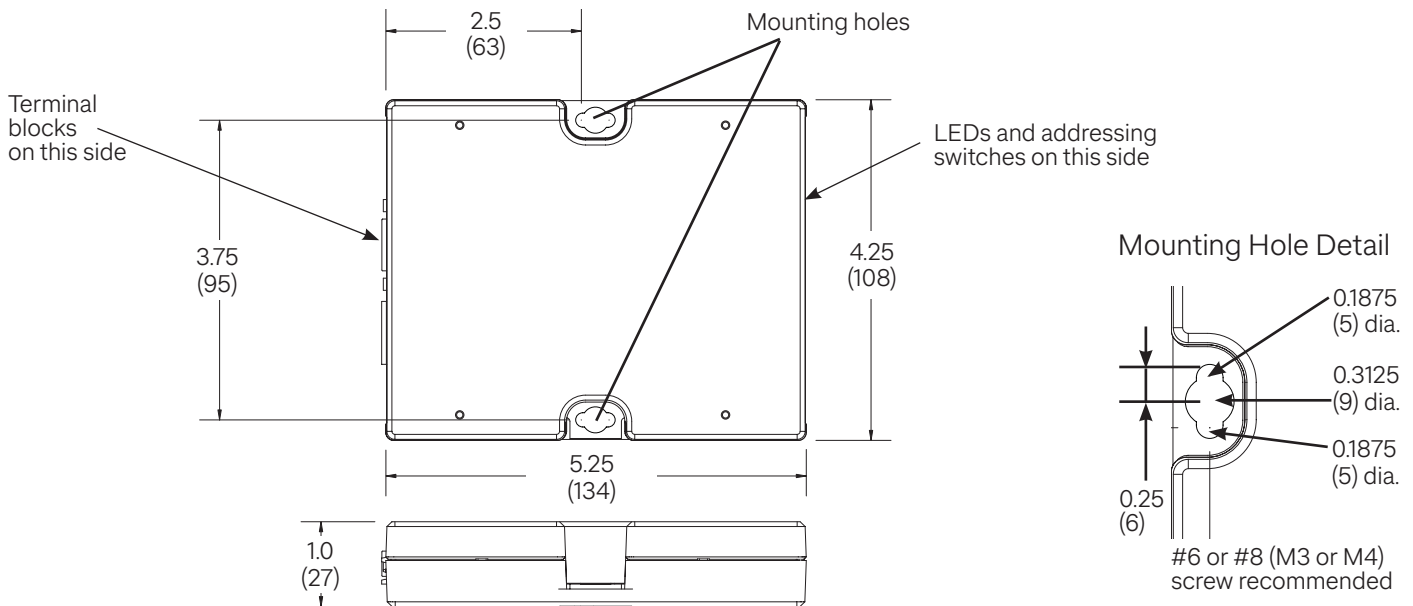


Mounting Options

Mount where terminal blocks, switches, and LEDs are accessible. Strip 3/8 in (10 mm) of insulation from wires. Each data link terminal will accept up to two 18 AWG (1.0 mm²) wires. Connect wiring as shown on the Wiring page. LED 1 lights continuously (Power) and LED 7 blinks rapidly (Data Link RX) when the SELV / PELV / NEC® Class 2 Data Link is installed correctly. Choose from the following mounting methods:

1 Direct Wall Mounting

Mount the control interface directly on a wall, as shown in **Mounting Methods** at right, using screws (not included). When mounting, provide sufficient space for connecting cables.

Mounting Methods

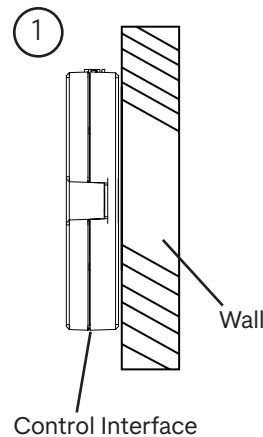

2 Rack Mounting


Place the unit in the LUT-19AV-1U AV rack using screws provided with the unit. The LUT-19AV-1U will hold up to four units.

3 Enclosed Wall Mounting

If conduit is desired for wiring, use the LUT-5x10-ENC to mount one unit.


Job Name:	Model Numbers:	
Job Number:		

Terminal Locations

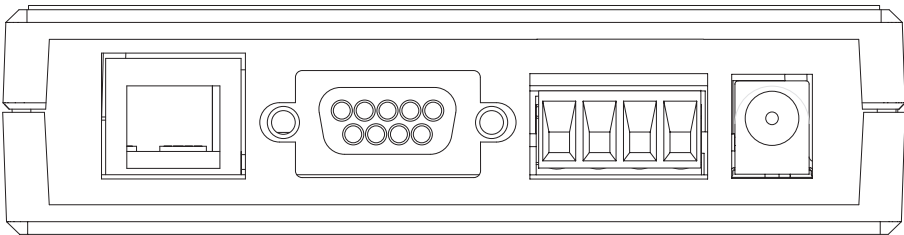

- Ethernet Link
(to PC or AV
Equipment)
- Female 9-pin
RS232 Link
(to PC or AV
Equipment)
- QS Link to
other wired
QS system
Devices

LED and DIP Switch Locations

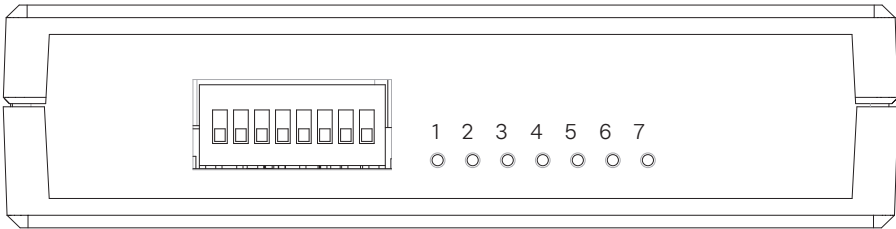

- DIP Switches
- LED 1: Power
LED 2: Ethernet Activity
LED 3: Unused
LED 4: RS232 Link Tx
LED 5: RS232 Link Rx
LED 6: QS Link Tx
LED 7: QS Link Rx

Wiring

RS232 Link


- Standard 9-pin serial connector plugs into RS232 equipment, and to QSE-CI-NWK-E
- Must be 50 ft (15 m) or less

RS232 Signals

Signals	Pin on 9-Pin Cable
Com	5
TxD	3
RxD	2

Ethernet Link Wiring


- Standard CAT5 cable connects QSE-CI-NWK-E Interface to PC, router, or other Ethernet source
- No crossover cable needed
- Must be 328 ft (100 m) or less
- Ethernet network and cable provided by others

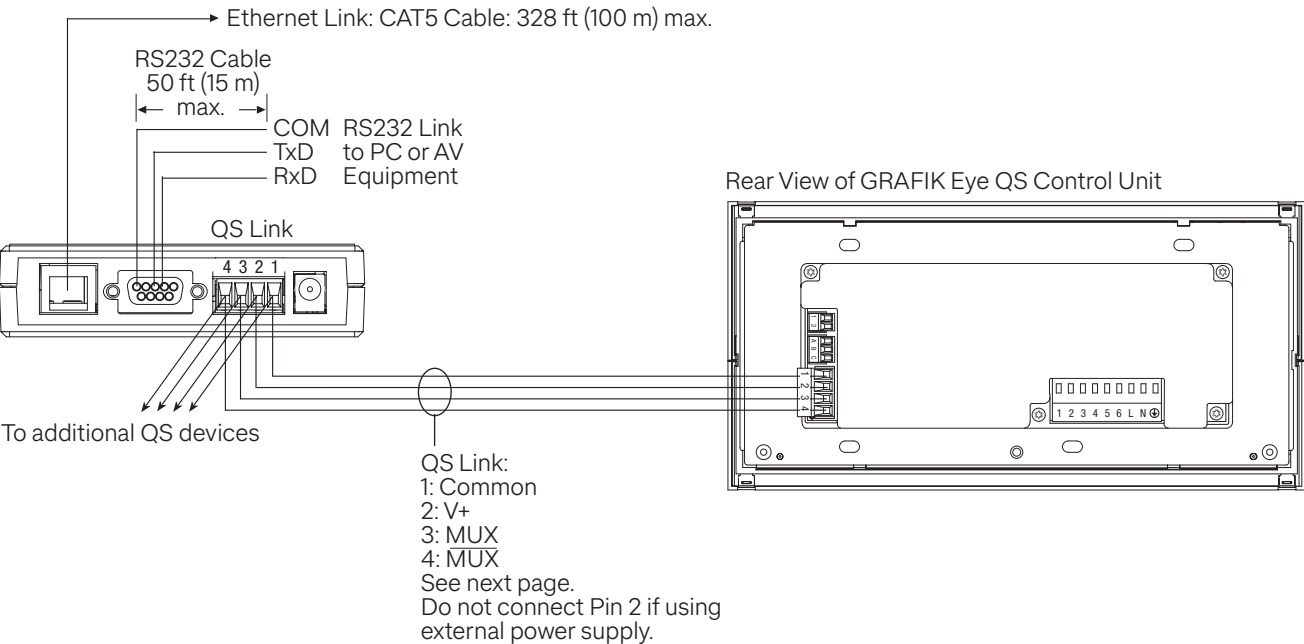


Wiring (continued): QS Link Wiring Methods (choose one)

- System communication uses SELV / PELV / NEC® Class 2 wiring. Follow all local and national electrical codes for installation
 - Each terminal accepts up to two 18 AWG (1.0 mm²) wires or one 12 AWG (4.0 mm²) wire
 - Total length of control link must not exceed 2000 ft (610 m)
- Do not allow SELV / PELV / NEC® Class 2 wires to contact live / mains wire
 - Typical Wire Sizes: See QS Link Wire Sizes table
 - Connect the terminal 1, 3, and 4 connections to all control units, wallstations, and control interfaces in the QS system. For terminal 2 connectivity, see below

Powered by GRAFIK Eye QS Control Unit

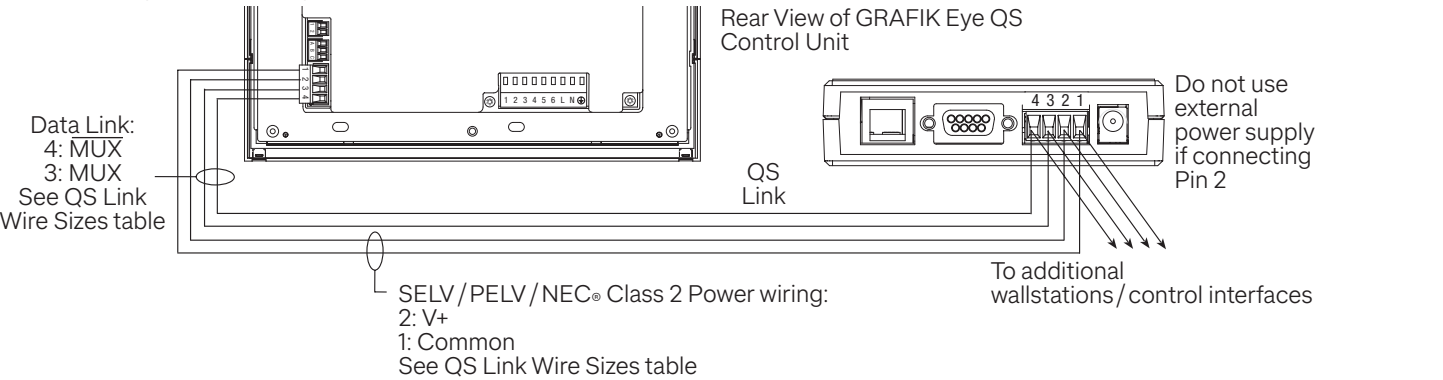

Powered by a QS Link Power Supply*

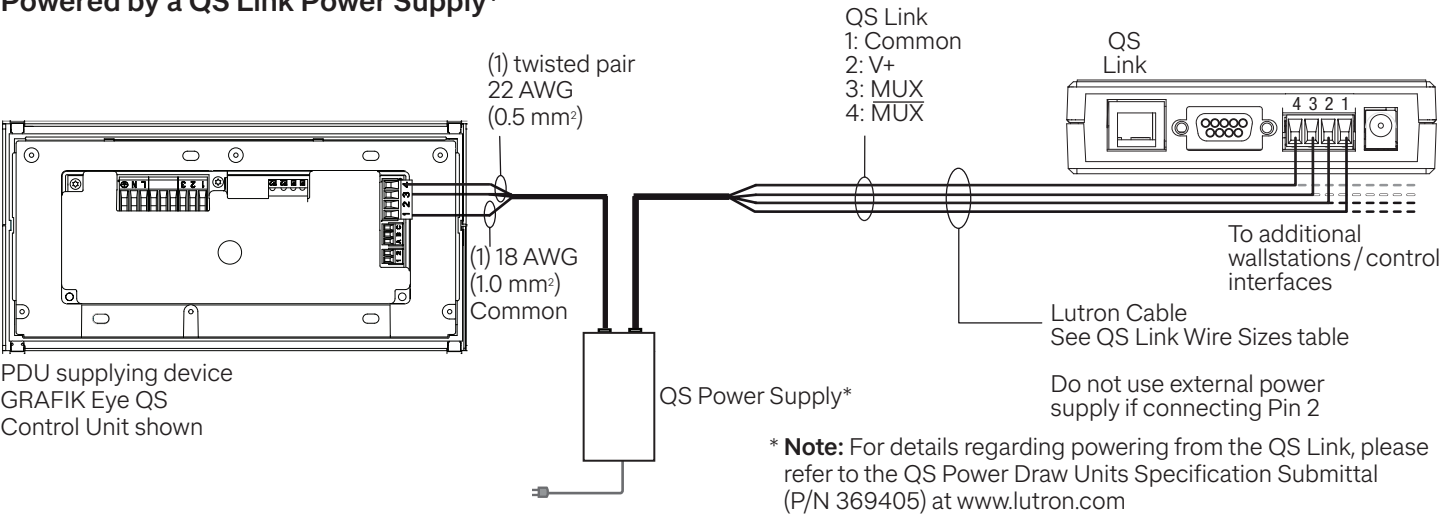

QS Link Wire Sizes (check compatibility in your area)

QS Link Wiring Length	Wire Gauge	Lutron Cable Part Number
< 500 ft (153 m)	Power (terminals 1 and 2)	GRX-CBL-346S (non-plenum) GRX-PCBL-346S (plenum)
	1 pair 18 AWG (1.0 mm²)	
	Data (terminals 3 and 4)	
500 ft–2000 ft (153 m–610 m)	1 twisted, shielded pair 22 AWG (0.5 mm²)	GRX-CBL-46L (non-plenum) GRX-PCBL-46L (plenum)
	Power (terminals 1 and 2)	
	1 pair 12 AWG (4.0 mm²)	
	Data (terminals 3 and 4)	
	1 twisted, shielded pair 22 AWG (0.5 mm²)	

Lutron, Athena, HomeWorks, GRAFIK Eye, Sivoia, Energi Savr Node, Quantum, and any related trade dress and logos are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.
All other product names, logos, and brands are property of their respective owners.

LUTRON

SPECIFICATION SUBMITTAL

Page6

Job Name:

Model Numbers:

Job Number: