

# Strobe Lights!

Linear strobes feature high-quality, long-life strobe lamps which are designed to reduce tungsten build-up for longer lamp maintenance cycles. Careful consideration is given to the relationship between lamp shade and lens design for maximum light output. The dry-electrolyte capacitor used runs cooler than those used in many competitive strobes, resulting in a more reliable product that won't fail due to overheating. The state-of-the-art strobe mechanism produces 2.2 joules of energy, while drawing relatively low level amperage. The strobe tube is rated for 7,000 hours.



## Part Numbers

2510-335 - Red

2510-336 - Green

2510-337 - Amber

## SPECIFICATIONS:

### Lamp Life

7,000 hours

### Lamp Style

Strobe

### Operating Temperature

-31°F to 150°F

### Net Weight

7.3 oz.

### Shipping Weight

8.5 oz.

### Diameter

3.125"

### Height

5.7"

### Voltage

12-48 VDC

### Operating Current

0.44-0.10 amps

### Flash Rate/Minute

65-95

### Joule Output


2.2

### Candlepower Peak

175,000

### Candlepower ECP

51.5"

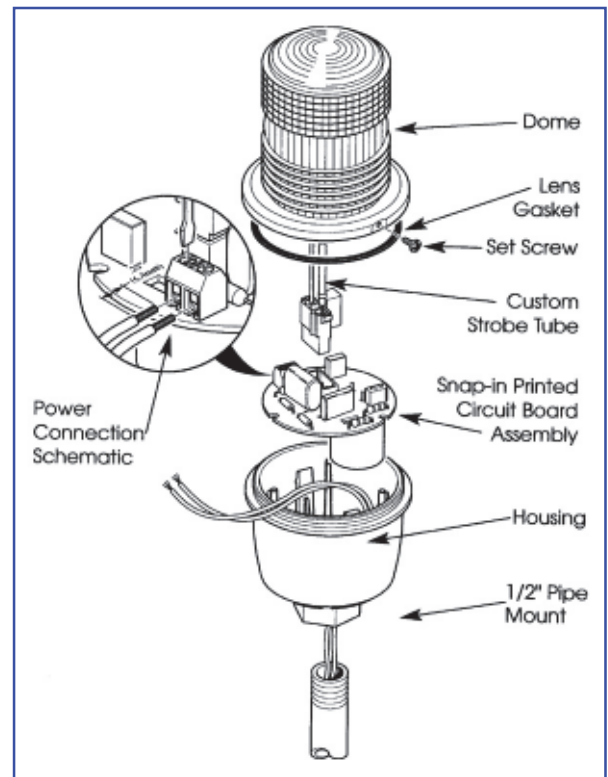

UL and cUL Listed  
CSA Certified  
CE Pending

**Linear**<sup>®</sup>  
*Building On Innovation.*

USA & Canada (800) 421-1587 & (800) 392-0123

(760) 438-7000 - Toll Free FAX (800) 468-1340

[www.linearcorp.com](http://www.linearcorp.com)