

LP-2116 Sixteen (16) Port Power over Ethernet (PoE) Midspan Injector

- Output up to 15.4 Watts PoE Power continuously Per Port
- Power up to 16 IP Devices
- Cost Effective
- Compliant to  **IEEE 802.3af** PoE Standards



Functions and Features

The LAN Power Model **LP-2116** Sixteen (16) Port PoE Midspan Desktop Injector supports powering up to Sixteen (16) IP 'PoE Enabled' End Devices. The Sixteen (16) Port PoE Midspan Injector adds up to 15.4 watts continuously per port at ~48 VDC wires in a standard Category 5, 5e, or 6 Ethernet cable. The LP-2116 delivers both data and power over a single standard Ethernet cable to a PoE enabled End device designed to receive both Data and Power through its RJ45 connector. The second RJ45 passes data only through to Ethernet Switch. The maximum cable distance from Ethernet Switch to end IP Device is 328 feet/100 meters.

Key Features of the Sixteen (16) Port PoE Injector include:

- Output Wattage is up to **15.4 Watts** continuously out each of its sixteen (16) ports-power up to 16 IP Devices
- Cost Effective
- Compliant to **IEEE 802.3af** Power over Ethernet Standards
- Supports Data links at 10Mbps or 100Mbps or 1000Mbps (Gigabit Compatible) per port
- Surge Protection with over voltage current and short circuit protected (protects the Ethernet Switch)
- Data and Power carried on same Ethernet cable
- Extended Temperature operating range
- LED indicators shows powering status

- Desktop design with optional 19" 1RU Rack Mount Kit Included
- Use with any PoE Compliant device including:
 - IP Security Cameras
 - Wireless LAN Access Points
 - VoIP Phones
 - Emerging Products
- Full 2 Year Product


Safety Approvals

- FCC
- CE
- UL/cUL




Unit Dimensions

Length: 17 ¼" (438 mm)
 Width: 9" (228mm)
 Height: 1 ¾" (44.5mm)
 Weight: 8.5 Lbs (3.8 Kg)

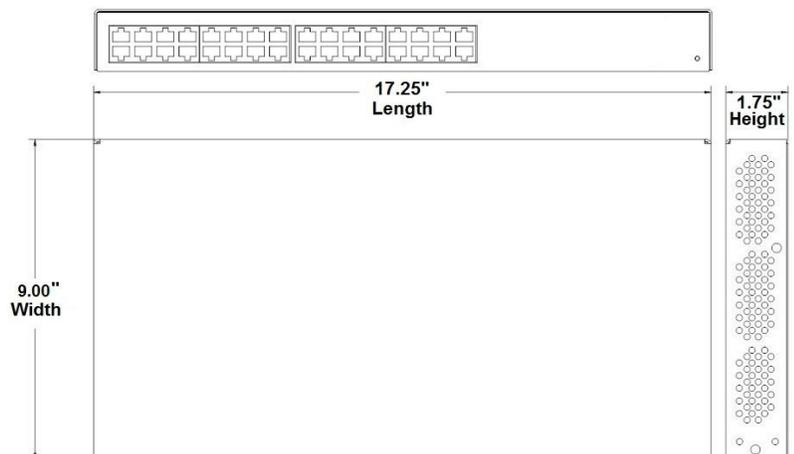

LAN-POWER

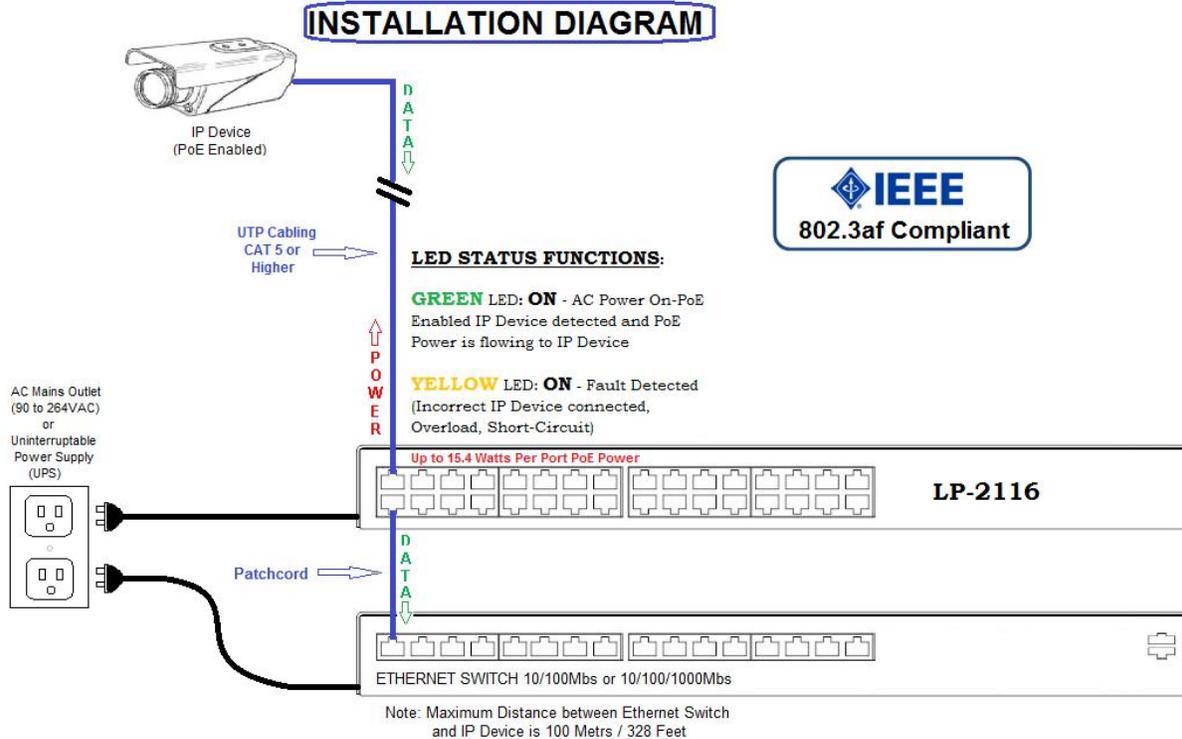

Ordering Info

Model **LP-2116** Sixteen (16) Port PoE Midspan Injector

Environmental Specifications

Operating Temperature: 32° to 104° F/ 0° to 40° C
 Storage Temperature: -13° to 149° F/ -25° to 65° C
 Relative Humidity: 5% to 90% non-condensing

Ethernet Data Throughput Speeds (Per Port):
 10 Mbs Ethernet or 100 Mbs Fast Ethernet or 1000Mbs supported (Gigabit Compatible)

Connector Type

Non-Shielded RJ-45 meets EIA 568A and 568B

Safety Approvals



Includes 19" Rack Mount Tabs for Rack Mounting to 19" Rack 1 RU



Electrical Specifications and Properties

AC Power Input Connector - IEC320 inlet 3 pin
 Power Supply:
 Voltage Range: 90 - 264VAC
 Voltage Rating: 100 - 240VAC
 Frequency Range: 47 - 63Hz
 Frequency Rating: 50 - 60Hz
 Input Current: 5.5A (RMS) maximum for 90VAC
 2.75A (RMS) maximum for 230VAC
 Leakage Current: <3.5mA at 254VAC 60Hz
 DC Power Output
 PoE Protocol: IEEE 802.3af
 Power on Data Pins: 4 & 5 (+), 7 & 8 (-)
 Output Voltage: 48VDC (+10%-0)
 Maximum Power per Port: 15.4 Watts – Compliant to IEEE 802.3af PoE Standard
 Total Power: 250 Watts
 Ripple and Regulation: 100mV maximum
 Efficiency: >75%
 Hold-up Time: 16mS Min. @ 120VAC Input and maximum load
 Turn-On Delay Time: 3 seconds maximum at maximum load, and 120VAC 60Hz, 25Hz
 Transient O/P Voltage Protection: 60V maximum at switch on and off at any AC line phase

Over Voltage/Current-Short Circuit Protection:
 Outputs equipped with short circuit and overload protection as per IEEE 802.3af specification-the output can be shorted permanently without damage