

VoicePlay

Streaming Amplified In-Wall Keypad Solution and Power Supply




V-KP-1

In-wall multi-room system with streaming audio and voice control with Amazon Alexa built-in.



V-PS-2



Russound VoicePlay App



Designed as primary audio source in new and existing audio systems



Works with Alexa, Apple AirPlay 2, Spotify Connect and other popular streaming services



Bluetooth 5.0 for playing audio from any phone or tablet



Power across any existing wiring (A-BUS, Cat5 or speaker wire)



Great builder solution

VoicePlay Keypad Features

Bluetooth, streaming, multi-room audio and app control

Easy touch Volume Up, Volume Down, Mic On/Off and Action (standard Alexa buttons)

15W per channel, synchronize up to 10 rooms

Includes both white and black color options

Services Included*

amazon music Spotify ((SiriusXM)) pandora®



*Service availability varies by region.


VoicePlay Power Supply Features

Power output 60W/24VDC

Each power supply supports two VoicePlay keypads

Over voltage, over current and over temperature protection

VoicePlay Keypad Overview

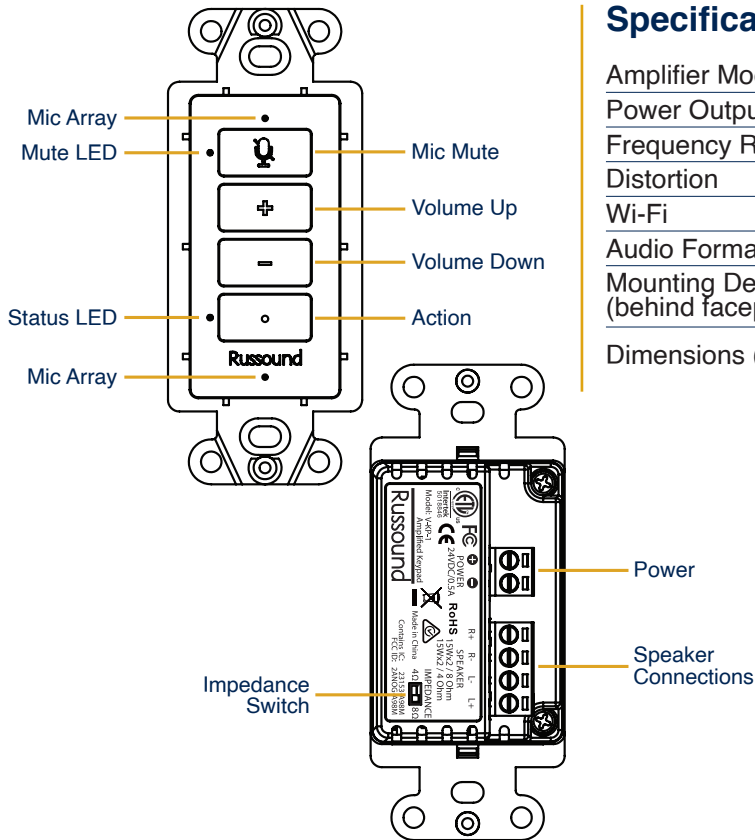

Specifications


Amplifier Model	V-KP-1
Power Output	2 x 15W, 4 or 8 Ohm selectable
Frequency Response	20-20kHz(±1dB)
Distortion	<0.1% (20Hz-20kHz@15W, 4/8 Ohms)
Wi-Fi	802.11 a/b/g/n/a/c, 1x1
Audio Formats	MP3, AAC, FLAC, ALAC, WMA and OGG
Mounting Depth (behind faceplate)	2.44" (62mm)
Dimensions (HxWxD)	4.2" x 1.7" x 2.5" (106mm x 43mm x 64mm)

What's in the Box

- 1 Russound VoicePlay Amplified Keypad
- 1 Removable, Screw-Down 2-Pin Power Connector
- 1 Removable, Screw-Down 4-Pin Speaker Connector
- 1 White Faceplate
- 1 Black Faceplate
- 2 Decora Wallplates (White and Black)

VoicePlay Power Supply (V-PS-2) sold separately

VoicePlay Power Supply Overview

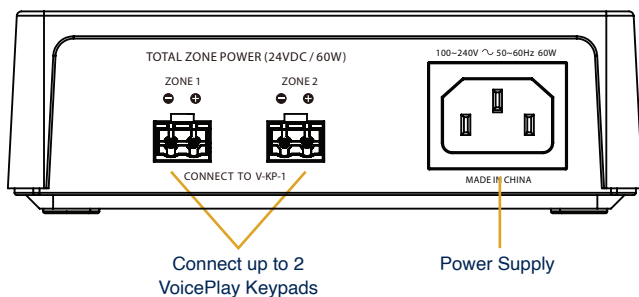

Specifications

Power Supply Model	V-PS-2
Supplies Power For	Up to 2 VoicePlay Keypads
Power Output	60W/24VDC
Protection	Over current, over voltage and high temperature
Dimensions (HxWxD)	2" x 4" x 6" (51mm x 102mm x 153mm)

What's in the Box


- 1 Russound VoicePlay Power Supply
- 1 US Power Cord
- 1 Installation Guide

a sound relationship

Russound

Application Wiring Diagram

Simplify multi-room audio systems with streaming and app control.
Upgrade to any VoicePlay system with no new wires.

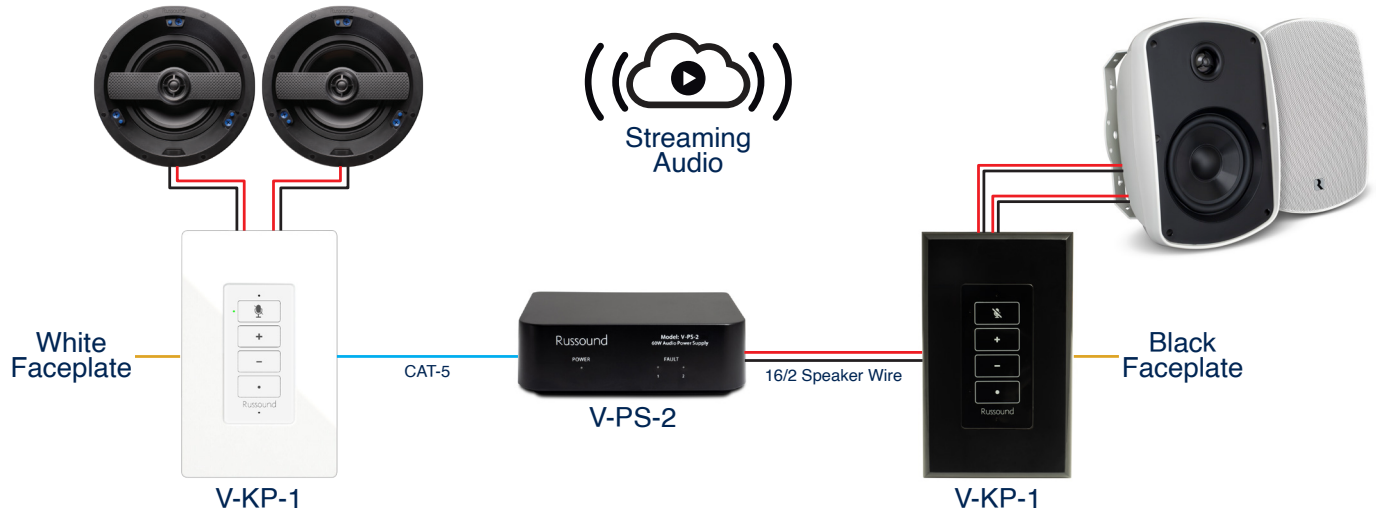

Amazon Alexa Built-In

Bring the features of Alexa to a multi-room audio system.

