



Philips Signage Solutions
Video Wall Display

55"

Direct LED Backlight
Full HD
500cd/m²

SignageSolutions

55BDL3005X

Go big

Versatile videowall display.

Command attention with a Philips X-Line Professional Videowall Display. Crisp contrast and narrow bezels enable clear, distraction-free imaging. Whether you're running an airport or hosting a conference.

Brilliant images. Endless possibilities.

- Full HD monitors. Brilliant images. Clear contrast
- IPS panel: rich color consistency from every angle
- Ultra-narrow (3.5 mm) bezels. For distraction-free images

Effortless setup. Total control.

- Add Android processing power with an optional CRD50 module
- Operate, monitor and maintain with CMND & Control

Powerful system solution

- Tiling mode. Create tiled 4K videowalls of any size
- FailOver ensures content is always playing
- OPS slot allows for PC embedding without cabling
- Energy-saving automatic backlight control

PHILIPS

Video Wall Display
55" Direct LED Backlight, Full HD, 500cd/m²

Highlights

Tiling mode

Connect two or more Philips professional displays to create a tiled videowall-without the need for external devices. A single player takes care of content, whether you have four screens or 40. 4K content is fully supported, and if you're showing that content on four screens you get the best possible dot-by-dot resolution.

Optional CRD50 module

Embed an Android System-on-Chip (SoC) in your Philips Professional Display. The optional CRD50 module is an OPS device that enables

Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

CMND & Control




Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs

55BDL3005X/00

and monitoring display status. Whether you're in charge of one screen or 100.

OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

Specifications

Picture/Display

- Diagonal screen size: 54.6 inch / 138.7 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 500 cd/m²
- Contrast ratio (typical): 1400:1
- Dynamic contrast ratio: 500,000:1
- Response time (typical): 8 ms
- Aspect ratio: 16:9
- Viewing angle (H / V): 178 / 178 degree
- Pixel pitch: 0.63 x 0.63 mm
- Display colors: 1.07 Billion
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement

Supported Display Resolution

Computer formats

| Resolution | Refresh rate |
|-------------|------------------|
| 3840 x 2160 | 30Hz |
| 1920 x 1200 | 60Hz |
| 1920 x 1080 | 60Hz |
| 1600 x 1200 | 60Hz |
| 1440 x 900 | 60Hz |
| 1366 x 768 | 60Hz |
| 1360 x 768 | 60Hz |
| 1280 x 1024 | 60Hz |
| 1280 x 800 | 60Hz |
| 1280 x 768 | 60Hz |
| 1024 x 768 | 60Hz |
| 800 x 600 | 56, 60, 72, 75Hz |
| 640 x 480 | 60, 67, 72, 75Hz |

Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 2160p | 30Hz |
| 1080p | 50, 60Hz |
| 1080i | 50, 60Hz |
| 720p | 50, 60Hz |
| 576p | 50Hz |
| 576i | 50Hz |
| 480p | 60Hz |
| 480i | 60Hz |

Connectivity

- Video input: DVI-D, VGA (Analog D-Sub), Component BNC x3, Composite (Share component Y), DisplayPort, HDMI 1.4 x 2
- Video output: DisplayPort, DVI-I

- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Audio output: 3.5mm jack
- External control: IR (in/out) 3.5 mm jack, RJ45, RS232C (in/out) 2.5 mm jack
- Other connections: OPS

Convenience

- Signal Loop Through: RS232, DisplayPort, IR Loopthrough
- Ease of installation: Carrying Handles
- Energy saving functions: Ambient light sensor, Smart Power
- Network controllable: RS232, RJ45
- Placement: Landscape (24/7), Portrait (24/7)
- Screen saving functions: Pixel Shift, Low Bright
- Tiled Matrix: Up to 10 x 10

Dimensions

- Bezel thickness: 3.5 mm
- Bezel width: Top/Left: 2.3mm, Bottom/Right: 1.2mm
- Set dimensions (W x H x D): 1213.4 x 684.2 x 107.65 mm
- Product weight: 26.5 kg
- VESA Mount: 400 x 400 mm
- Product weight (lb): 58.42 lb
- Set dimensions in inch (W x H x D): 47.77 x 26.93 x 4.23 inch

Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Altitude: 0 ~ 3000 m
- Relative humidity: 20 ~ 80 %
- MTBF: 60,000 hour(s)

Power

- Mains power: Universal (AC 100 - 240V) Current: 2.5 A
- Consumption (On mode): 155 W
- Standby power consumption: <0.5W
- Consumption (Max): 320 W

Sound

- Built-in speakers: 2 x 10W (RMS)


Accessories

- Included Accessories: IR cable, IR sensor cable (1.8 m), RS232 daisy-chain cable, Edge Alignment Kit (1)

- 1 pcs, Edge Alignment Kit (2) - 2 pcs, Thumbscrew (8pcs)
- Included accessories: Remote Control, Batteries for remote control, AC Power Cord, Quick start guide, DVI-D cable, Edge alignment pins, RS232 cable

Miscellaneous

- On-Screen Display Languages: Arabic, Simplified Chinese, Traditional Chinese, English, French, German, Italian, Japanese, Polish, Russian, Spanish, Turkish
- Regulatory approvals: CE, FCC, Class B, UL/cUL, CB, GOST, EPEAT
- Warranty: 3 year warranty

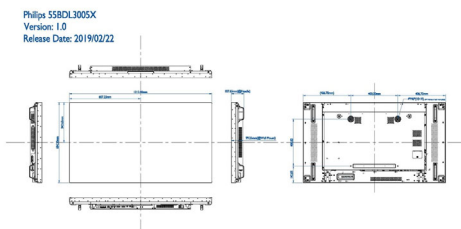

Issue date 2020-09-17

Version: 4.0.1

12 NC: 8670 001 59253
EAN: 87 12581 75865 3

© 2020 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com