



Philips Signage Solutions  
P-Line Display

55"

Powered by Android  
500cd/m<sup>2</sup>

**Signage**Solutions

55BDL5055P

## Tough and capable

Robust, bright 24/7 display.

Meet the demands of challenging environments with a robust P-Line professional Full HD display. Tough components keep this display working from kitchen to engine room. The wide viewing angle ensures crucial information is clear.

### **Brilliant picture. Strong build.**

- Android SoC processor. Native and web apps
- IPS panel: rich color consistency from every angle
- Robust metal housing
- D-image: clinically accurate imaging

### **Effortless setup. Total control.**

- CMND & Deploy. Install and launch apps remotely
- Operate, monitor and maintain with CMND & Control
- CMND & Create. Develop and launch your own content
- Proof of Play for Android content. Know what's playing
- Integrated mPCIe slot for optional 4G/LTE module

### **Robust system solution**

- Energy-saving automatic backlight control
- Integrated HTML5 browser. Play and control online content
- FailOver ensures content is always playing

# PHILIPS

# Highlights

## Powered by Android

Control your display via an Internet connection. Android-powered Philips Professional Displays are optimized for native Android apps, and you can install web apps directly to the display too. A new Android OS ensures the software is kept secure and remain to the latest specification for longer.

## D-image



This Philips Professional Display is factory-calibrated to meet clinical compliance standards for greyscale performance. The optimal image achieved by the display can be used to review medical images in consultation rooms or lecture theatres.

## CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs

and monitoring display status. Whether you're in charge of one screen or 100.

## CMND & Create



Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.

## CMND & Deploy


Quickly install and launch any app-even when you're off-site and working remotely. CMND & Deploy lets you add and update your own apps, as well as apps from the Philips Professional Display App Store. Simply scan the QR code, log in to the store, and click on the app you want to install. The app is automatically downloaded and launched.

## Integrated mPCIe slot

Easily connect 4G/LTE modules to your Philips professional display. The integrated mPCIe slot enables your display to communicate with other devices that share the same wireless


connectivity. Invaluable if you're installing displays in locations such as banks or government buildings, where you cannot get onto the local network.

## FailOver



From waiting room to meeting room, never show a blank screen. FailOver lets your Philips Professional Display switch automatically between primary and secondary inputs ensuring content keeps playing even if the primary source goes down. Simply set a list of alternate inputs to be sure your business is always on.

## OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

# Specifications

## Picture/Display

- Diagonal screen size: 54.64 inch / 138.8 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 500 cd/m<sup>2</sup>
- Contrast ratio (typical): 1300:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 8 ms
- Pixel pitch: 0.63 x 0.63 mm
- Display colors: 1.0737 billion
- Viewing angle (H / V): 178 / 178 degree
- Operating system: Android 5.1.1

## Connectivity

- Video input: Display Port 1.2 (x1), DVI-I (x 1), HDMI 1.4 (x2), USB 2.0 (x2), USB 2.0 (x1)
- Video output: DisplayPort (x1), DVI-I (x1)
- Audio input: 3.5 mm jack
- Audio output: 3.5mm jack
- Other connections: OPS, Micro SD (x1), Micro USB(type B)x1
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack
- Optional WiFi functionality: requires WiFi module and external antennas

## Supported Display Resolution

### Computer formats


Resolution	Refresh rate
1024 x 768	60, 75Hz
1280 x 1024	60Hz
1280 x 768	60Hz
1280 x 800	60Hz
1360 x 768	60Hz
1600 x 1200	60Hz
1920 x 1080	60Hz
640 x 480	60, 72, 75Hz
720 x 400	70Hz
800 x 600	60, 75Hz

### Video formats

Resolution	Refresh rate
1080i	25, 30Hz
1080p	50, 60Hz
480i	30Hz
480p	60Hz
576i	25Hz
576p	50Hz
720p	50, 60Hz

## Dimensions

- Set dimensions (W x H x D):

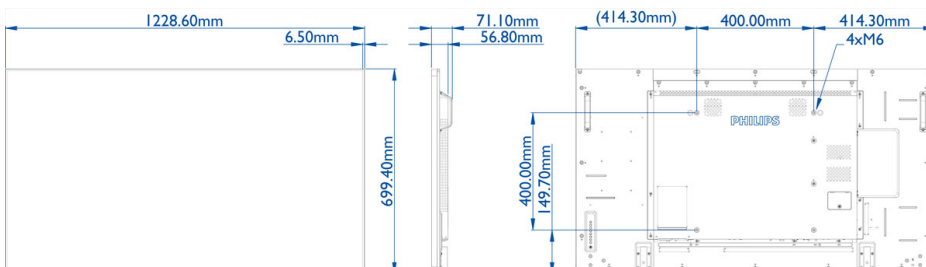

- 1228.6 x 699.4 x 56.8 mm
- Set dimensions in inch (W x H x D): 48.4 x 27.6 x 2.3 inch
- Bezel width: 6.5 mm
- Product weight (lb): 55.6 lb
- Product weight: 25.2 kg
- VESA Mount: 400 x 400 mm, M6

## Convenience

- Placement: Landscape, Portrait
- Tiled Matrix: Up to 15 x 15
- Keyboard control: Hidden, Lockable
- Signal loop through: IR Loophrough, DisplayPort, DVI, RS232, VGA
- Network controllable: RJ45, HDMI (One Wire), RS232
- Energy saving functions: Smart Power
- Screen saving functions: Pixel Shift, Low Bright
- Ease of installation: AC Out, Smart Insert, Carrying Handles
- Other convenience: G sensor

## Power

- Standby power consumption: <0.5 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz
- Consumption (Typical): 110 W
- Consumption (EPA 7.0): 90.93 W
- Energy Label Class: G

## Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80(operation), 5 - 95(storage) %
- Altitude: 0 ~ 3000 m
- MTBF: 60,000 hour(s)

## Sound

- Built-in speakers: 2 x 10W RMS

## Accessories

- Included accessories: Batteries for remote control, Quick start guide, Remote Control, Warranty Leaflet, AC Power Cord, RS232 cable
- Included Accessories: Edge Alignment Kit (1)-2pcs, Edge Alignment Kit (2)-1pcs, Philips logo (x1), Power cable ( 3m ), RS232 Cable ( 3m ), RS232 Daisy chain cable (x1), Thumbscrew (8pcs), RS232 daisy-chain cable
- Stand: BM04642/00(Optional)

## Multimedia Applications

- USB Playback Audio: AAC, M4A, MP1, MP2, MP3, WMA
- USB Playback Picture: BMP, GIF, JPEG, JPG, PNG
- USB Playback Video: 3GP, AVI, DAT, FLV, MKV, MOV, MP4, MPG, TS, VOB, WEBM

## Miscellaneous

- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese, Danish, Dutch, Finnish, Norwegian, Portuguese, Swedish
- Regulatory approvals: EnergyStar 7.0, CE, FCC, Class B, CCC, BSMI, CB, VCCI, CEC, EAC, PSB, EMF, UL/cUL
- Warranty: 3 year warranty

## Internal Player

- CPU: Octacore Cortex A53 1.5GHz
- GPU: PowerVR SGX6110
- Memory: 2GB DDR3
- Storage: 16GB EMMC



Issue date 2021-02-28

Version: 10.2.1

12 NC: 8670 001 41461  
EAN: 87 12581 74224 9

© 2021 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)