


RC840T Series

Electromechanical Relays

Compatible with 2- and 3-wire thermostats, this all-in-one relay includes a built-in 24 V transformer

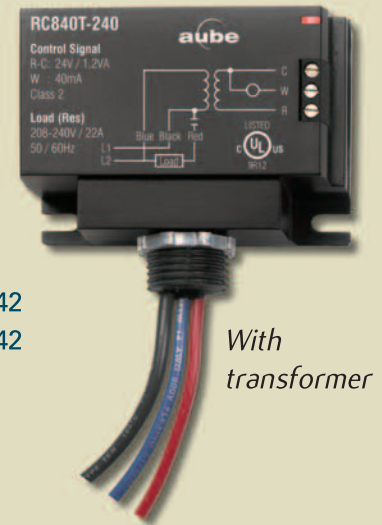

With transformer

MODELS & RATINGS

RC840T-240	4575 W @ 208 V	22 A resistive	1.0 HP inductive	FLA 13 / LRA 42
	5280 W @ 240 V	22 A resistive	1.5 HP inductive	FLA 12 / LRA 42
RC840T-347	6245 W @ 347 V	18 A resistive		

All above models operate on 50/60 Hz

SPECIFICATIONS

CONTROL SIGNAL
24 VAC / 40 mA

TRANSFORMER RATINGS
24 VAC / 1.2 VA / Class 2

HUMIDITY LIMITS
0% to 95% non-condensing

TERMINAL WIRE SIZE
12 AWG

DIMENSIONS (H•W•D)
68 x 82 x 36 mm / 2.7 x 3.2 x 1.4 inches

FEATURES

Direct replacement for any brand name relay

Built-in 24 V transformer for easy installation

Compatible with 24 V thermostats with 2-wire connections (R, W) or 3-wire connections (R, W, C)


Immediate relay activation provides increased temperature control and comfort

Epoxy-soundproofed relay ensures quiet operation

Terminal board connection enables easy installation

Low current consumption means multiple relays can be controlled by a single thermostat

INSTALLATION

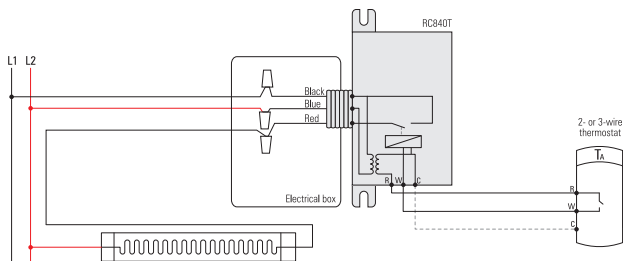

3 year warranty

COMPATIBLE WITH AUBE THERMOSTATS:

- TH114-A-024T
- TH115-A-024T
- TH135-01
- TH140-28-01
- TH150 Series