

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725901

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Construction Details:

Number of Conductors: 4/C
Conductor: 18AWG Stranded Bare Copper.
Insulation Material: Remguard Plenum Polymer
Insulation Color Code: Black, Red, White, Green
Jacket Material: Remguard Plenum Polymer
Jacket Color: Gray
Rip Cord: Nylon
Nominal Diameter: 0.179 in.
Surface Print: 3122598 POWER LOCK CMP 4/18AWG C(ETL)US
A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Construction Details:

Number of Pairs: 3 Pair
Conductor: 22AWG Stranded Bare Copper.
Insulation Material: Remguard Plenum Polymer
Insulation Color Code: Black paired with Red
White paired with Green
Orange paired with Brown
Overall Shield: Aluminum/Polyester
Drain Wire: Stranded Tin Copper
Jacket Material: Remguard Plenum Polymer
Jacket Color: Orange
Rip Cord: Nylon
Nominal Diameter: 0.200 in.
Surface Print: 3122598 CARD READER CMP 3P/22AWG C(ETL)US
A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Construction Details:

Number of Conductors: 4/C
Conductor: 22AWG Stranded Bare Copper.
Insulation Material: Remguard Plenum Polymer
Insulation Color Code: Black, Red, White, Green
Jacket Material: Remguard Plenum Polymer
Jacket Color: Blue
Rip Cord: Nylon
Nominal Diameter: 0.141 in.
Surface Print: 3122598 REX/SPARE CMP 4/22AWG C(ETL)US
A B C D E 0 1 2 3 4 5 6 7 8 9

Component 4 Construction Details:

Number of Conductors: 2/C
Conductor: 22AWG Stranded Bare Copper.
Insulation Material: Remguard Plenum Polymer
Insulation Color Code: Black, Red
Jacket Material: Remguard Plenum Polymer
Jacket Color: White
Rip Cord: Nylon
Nominal Diameter: 0.122 in.
Surface Print: 3122598 DOOR CONTACT CMP
2/22AWG C(ETL)US A B C D E 0 1 2 3
4 5 6 7 8 9

Overall Construction Details:

Construction: Four components are cabled together and overall jacketed
Jacket Material: Remguard Plenum Polymer
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.410 in.
Surface Print: 3122598 ACCESS CONTROL CABLE
CMP 4/18AWG 12/22AWG C(ETL)US +
Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating
Operation: -2°C to 60°C
Nominal Weight: 99 lbs. / 1,000 feet


Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMP
- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.




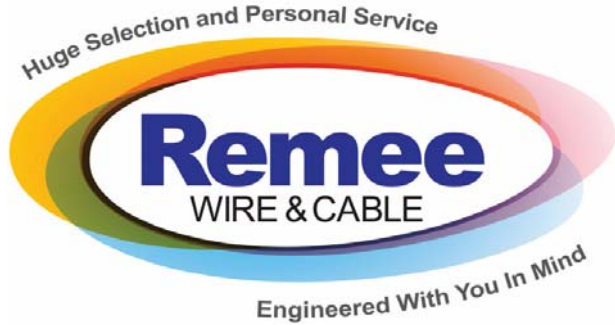

Access Control Cable Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: 725901

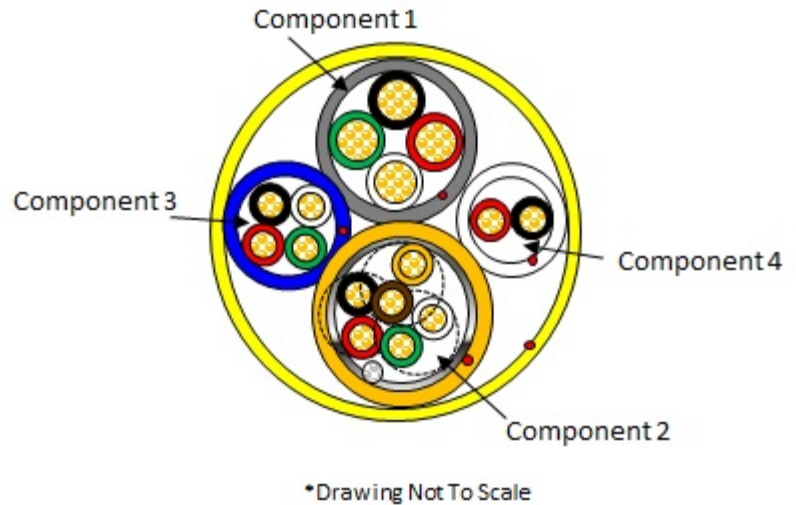

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

