

Access Control Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: R00907

Applications:

This document establishes the specifications for a composite cable individually and overall jacketed used for communication applications.

Component 1 Construction Details:

Number of Conductors: 4/C
 Conductor: 18AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red, White, Green
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Gray
 Rip Cord: Nylon
 Nominal Diameter: 0.179 in.
 Surface Print: 3122598 POWER LOCK CMR 4/18AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 2 Construction Details:

Number of Conductors: 6/C (3 Pairs)
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black paired with Red
 White paired with Green
 Orange paired with Brown
 Overall Shield: Aluminum/Polyester
 Drain Wire: Stranded Tin Copper
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Orange
 Rip Cord: Nylon
 Nominal Diameter: 0.200 in.
 Surface Print: 3122598 CARD READER CMR 3P/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 3 Construction Details:

Number of Conductors: 2/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red
 Jacket Material: Polyvinyl Chloride
 Jacket Color: White
 Rip Cord: Nylon
 Nominal Diameter: 0.122 in.
 Surface Print: 3122598 DOOR CONTACT CMR 2/22AWG C(ETL)US
 A B C D E 0 1 2 3 4 5 6 7 8 9

Component 4 Construction Details:

Number of Conductors: 4/C
 Conductor: 22AWG Stranded Bare Copper.
 Insulation Material: Polyvinyl Chloride
 Insulation Color Code: Black, Red, Green, White
 Jacket Material: Polyvinyl Chloride
 Jacket Color: Blue
 Rip Cord: Nylon
 Nominal Diameter: 0.140 in.
 Surface Print: 3122598 REX/SPARE CMR 4/22AWG
 C(ETL)US A B C D E 0 1 2 3 4 5 6 7 8 9

Overall Construction Details:

Construction: Four components are cabled together and overall jacketed
 Jacket Material: Polyvinyl Chloride
 Nominal Jacket Thickness: 0.025 in.
 Nominal Diameter: 0.445 in.
 Surface Print: 3122598 ACCESS CONTROL CABLE
 CMR 4/18AWG 12/22AWG C(ETL)US +
 Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating	Operation: -20°C to 60°C
Nominal Weight:	101 lbs. / 1,000 feet


Codes & Listings:

- NEC Article 800
- UL Subject 444, Type CMR
- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



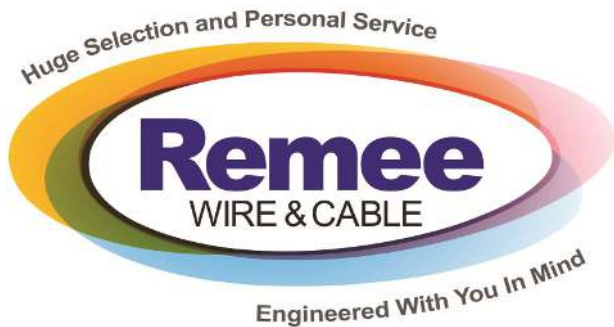

Access Control Cable Non-Plenum

ETL listed for guaranteed performance
Made in the USA

Part No.: R00907

Note: While Remeewire Products Corp. has made every reasonable effort to ensure the accuracy of the information in this document, Remeewire Products Corp. does not guarantee that it is error-free, nor does Remeewire Products Corp. make any other representation, warranty, or guarantee that the information is accurate, correct, reliable or current. Remeewire Products Corp. reserves the right to make any adjustments to the information contained herein at any time without notice. Remeewire Products Corp. expressly disclaims all implied warranties regarding the information contained herein, including but not limited to, any implied warranties of merchantability or fitness for particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice.

