


# STI Heater Kit

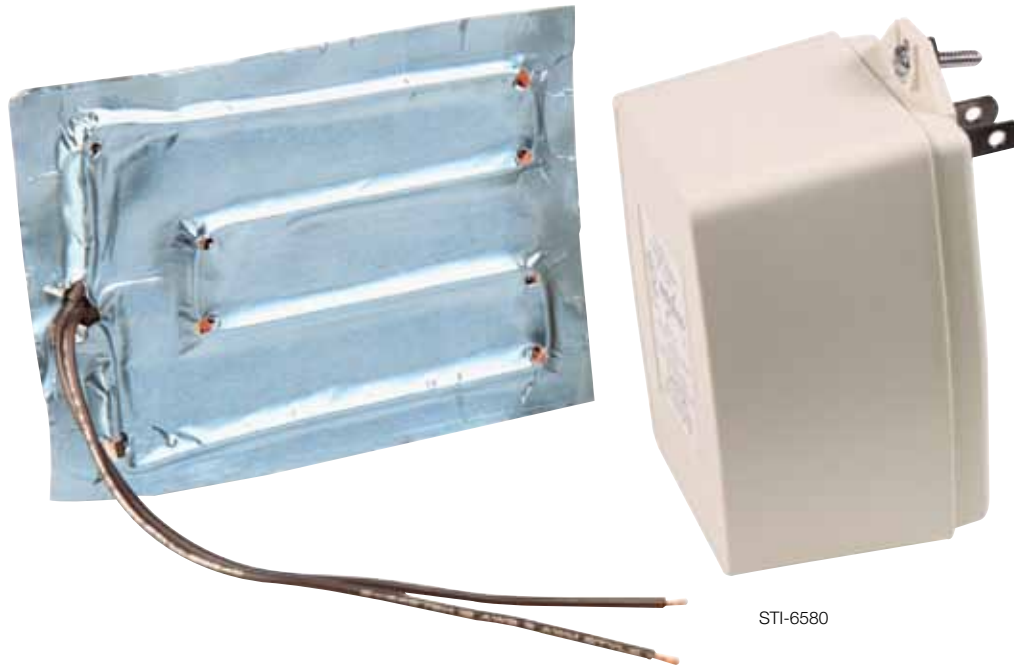

STI-6580

## PRODUCT OVERVIEW

These easy to install kits are the answer for protecting expensive electronic units that must be installed in low temperature areas, indoors or outdoors. In addition to assuring continued operation of protected units, they also keep LCD's from becoming sluggish and help them stay visible.

## HOW IT WORKS

The 12-volt system (STI-6580) incorporates a 12-volt transformer and is rated at 25 watts. The 24-volt system (STI-6583) is designed to get its power directly from a remote power supply (other than the fire panel) or CCTV power source and is rated at 8 watts. Both systems include a foil heater pad with adhesive backing and a thermostat. STI Heater Kits operate in conjunction with enclosures such as the STI Stopper II<sup>®</sup> and Universal Stopper<sup>®</sup> to protect and help expensive electronic components remain operable in low temperature areas.

## FEATURES

- Allows critical electronic components to operate at low temperatures.
- Self-adhesive heater pad.
- Keeps electronic components warm when mounted in a protective keypad cover. Results may vary based on installation and enclosure used.
- Temperature controlled.
- Thermostat opens at 23° and closes at 41°F (-5° to 5°C).
- Both 12-volt and 24-volt models available.
- Keeps LCD's from becoming sluggish and helps them stay visible at freezing temperatures.
- Easy to install and highly effective.
- One (1) year warranty from the date of original purchase.

# STI Heater Kit

Dimensions and Technical Information

## MODELS AVAILABLE

STI-6580 12 volt heater Kit  
STI-6583 24 volt heater Kit

## SPECIFICATIONS

**Heater Pad Size** 4" x 5 1/2"


**Thermostat Size** 3/4" x 1/4" x 3/16"

**Thermostat Active** Opens at 23°F and closes at 41°F (-5°C to 5°C)  
Creep action thermostat

**STI-6580 power** 12 Volt 25 Watts (2.25 amp) AC or DC 40 VA 12  
VAC power supply included

**STI-6583 power** 24 Volt 8 Watts (.5 amp) AC or DC power  
supply not included

**NOTE:** Keeps electronic components warm when mounted in a protective cover or enclosed space. Results may vary based on installation and enclosure used. Not polarity sensitive.

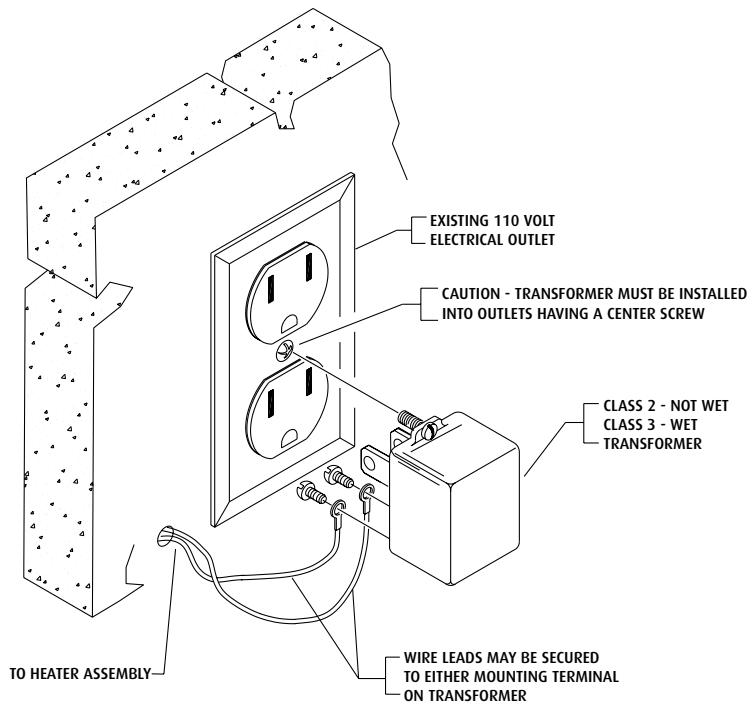

**Safety Technology  
International, Inc.**

2306 Airport Road  
Waterford, Michigan  
48327, USA

Tel: 248-673-9898  
Fax: 248-673-1246  
Toll-free: 800-888-4784  
info@sti-usa.com  
www.sti-usa.com

Unit 49G Pipers Road  
Park Farm Industrial Estate  
Redditch, Worcestershire  
B98 0HU England

Tel: 44 (0) 1527 520 999  
Fax: 44 (0) 1527 501 999  
Free: 0800 085 1678 (UK)  
www.sti-europe.com