



Model PLEX-1 and PLEX-2



The door option to use when single button operation is required.

The PLEX door option combines a dead-front panel with a clear polycarbonate window to limit access to the control panel. This option is useful when it is desired to have the On-board annunciator protected. It also provides single button operation of the Reset and Silence buttons once the outer door has been opened.

Operation

The PLEX door option can be used in jurisdictions that require single button operation of the reset and silence functions. With the PLEX option installed the on-board annunciator is protected by a UV stabilized polycarbonate clear window. Once the panel door is opened the operator needs only to press the Silence or Reset button, no access code required.

Features


- On-board annunciator protected by a clear polycarbonate window for clear view of status without access to the keypad.
- Dead-front panel protects control panel electronics from tampering when door is open.
- Easy to install.
- Allows operator to Silence or Reset the control panel from the on-board annunciator with the touch of a single button.

Compatible Controls

PLEX-1	5820XL
PLEX-2	5208
	5808


Included Parts

- 1 Polycarbonate window
- 1 Metal Bezel W/Mounting Studs
- 6 1/4" Hex Nuts
- 1 Dead-Front Panel
- 4 #6-32 x 1/4" Zinc Coated Screws

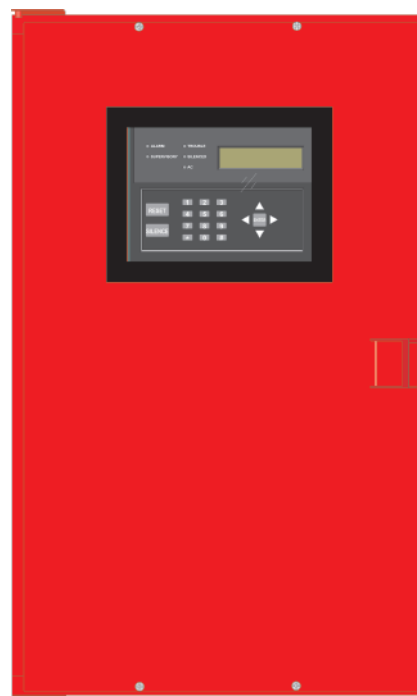

**Door Open
Dead-front Installed**

Model PLEX-1 and PLEX-2 No Access Code Door Option

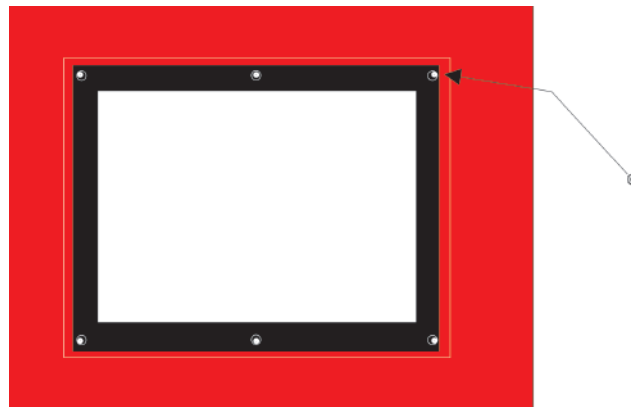

**Inside View of
Control Panel Door**



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 7550 Meridian Circle Suite 100, Maple Grove, Mn 55369-4927. Phone: (800) 328-0103, Fax: (763) 493-6475. World Wide Web: <http://www.silentknight.com>

MADE IN AMERICA
FORM# 350357, Rev. A 09/04
Copyright © 2004 Silent Knight