


Securitron® EMH Electromechanical Handle

*Mechanical activation for
electronic lock release in
a compact handle*



The EMH
Electromechanical
Handle works on
any push, pull or
swing-through door,
and is designed for
specialized outdoor
applications.

Pressing the handle activates internal
mechanical switches that release the lock.
Meets "no special tools or knowledge"
criteria for code requirements.

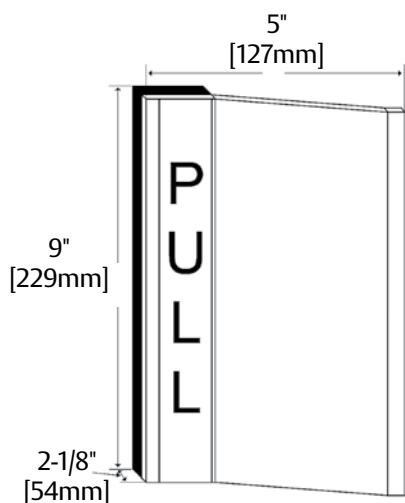


Features

Standard Features

- Activates a DPDT 2A rated output when pushed or pulled, to allow free egress or initiate an exit delay timer
- 16 ft. [4.8m] 22AWG 3 conductor cable and armored door cord included
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

Optional Features

- (EL) ElectroLynx® ready connectors

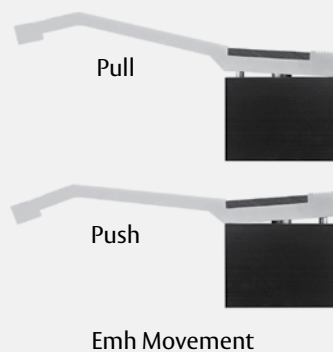

Specifications

Certifications

- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- CSFM—California State Fire Marshal Approved
- CE: EN 50091-1, EN 61000-6-2 Approved

Dimensions

- 5"L x 2-1/8"D x 9"H

Electrical

- 40 mA at rest; 25 mA releasing at 12 or 24 VDC
- 2A DPDT relay

Operating Temperature

- +32 to +110F [0 to +43C]
- Indoor use only

Shipping Weight

- 3 lbs [1.36kg]



How to Order

Connector Style	Model Series	Finish
EL	– EMH	– CL
(blank) None	EMH Electromechanical Handle	BK Black Anodized
EL Electrolynx®		CL Clear Anodized

